

UCRL--88232

DE83 012104

UCRL 88232

PREPRINT

Conf-830406--39

NOTICE

PORTIONS OF THIS REPORT ARE ILLUSTRATIVE.


It has been reproduced from the best available copy to permit the broadest possible availability.

FUSION-BREEDER-REACTOR DESIGN STUDIES

R.W. Moir, J.D. Lee, M.S. Coops, F.J. Fulton, W.S. Neef, Jr.,
 Lawrence Livermore National Laboratory;
 D.H. Berwald, R.B. Campbell, B.A. Flanders, J.K. Garner, N. Ghoniem,
 J.R. Ogren, Y. Saito, A. Slomovik, R.H. Whitley, TRW;
 K.R. Schultz, G.E. Benedict, E.T. Cheng, R.L. Creedon,
 I. Maya, V.H. Pierce, J.B. Strand, C.P.C. Wong, GA Technologies, Inc. ;
 J.S. Karbowski, Westinghouse Electric Corp. ;
 J.H. DeVan, P. Torterelli, Oak Ridge National Lab;
 L.G. Miller, P.Y.S. Hsu, J.M. Beeston, Idaho National Engineering Lab (INEL-EG&G);
 N.J. Hoffman, Energy Technology Engineering Center

This paper was prepared for submittal to:
 American Nuclear Society
 Fifth Topical Meeting on
 The Technology of Fusion Energy
 Knoxville, TN
 April 26-28, 1983

April 5, 1983

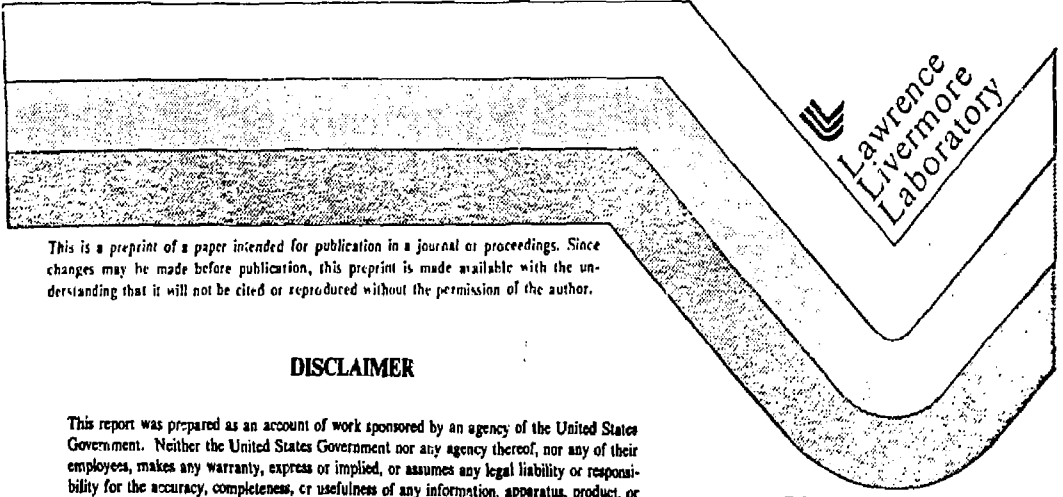

This is a preprint of a paper intended for publication in a journal or proceedings. Since changes may be made before publication, this preprint is made available with the understanding that it will not be cited or reproduced without the permission of the author.

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

MASTER

DISTRIBUTION OF THIS DOCUMENT IS UNLIMITED

See

FUSION-BREEDER-REACTOR DESIGN STUDIES*

R. W. MOIR, J. D. LEE, M. S. COOPS, F. J. FULTON, W. S. NEEF, JR.
Lawrence Livermore National Laboratory, P.O. Box 5511, L-644
Livermore, CA 94550
(415) 422-9808

D. H. BERWALD, R. B. CAMPBELL, B. FLANDERS, J. K. GARNER, H. GHONEM (Consultant, UCLA)
J. DGREN, Y. SAITO, A. SLOMDVIK, R. H. WHITLEY, TRW, Inc.
One Space Park
Redondo Beach, CA 90278

K. R. SCHULTZ, G. E. BENEDICT, E. T. CHENG, R. L. CREEDON
I. MAYA, V. H. PIERCE, J. B. STRAND, C. P. C. WONG, GA Technologies, Inc.
P.O. Box 81608
San Diego, CA 92138

J. S. KARBOWSKI, Westinghouse Electric Corp.
Advanced Reactor Division, Fusion Engineering Dept., P.O. Box 158
Madison, PA 15663

J. H. DEVAN, P. TORTERELLI, Oak Ridge National Lab
P.O. Box X, Mail Stop 45005
Oak Ridge, TN 37830

L. G. MILLER, P. Y. S. HSU, J. M. BEESTON, Idaho National Engineering Lab (INEL-EG&G)
P.O. Box 1625
Idaho Falls, ID 83401

N.J. Hoffman, Energy Technology Engineering Center
P.O. Box 1449, 8900 De Sota Ave.
Canoga Park, CA 91304

ABSTRACT

Studies of the technical and economic feasibility of producing fissile fuel in tandem mirrors and in tokamaks for use in fission reactors are presented. Fission-suppressed fusion breeders promise unusually good safety features and can provide make-up fuel for 11 to 18 LWRs of equal nuclear power depending on the fuel cycle. The increased revenues from sales of both electricity and fissile material might allow the commercial application of fusion technology significantly earlier than would be possible with electricity production from fusion alone. Fast-fission designs might allow a fusion reactor with a smaller fusion power and a lower Q value to be economical and thus make this application of fusion even

earlier. A demonstration reactor with a fusion power of 400 MW could produce 600 kg of fissile material per year at a capacity factor of 50%. The critical issues, for which small scale experiments are either being carried out or planned, are: 1) material compatibility, 2) beryllium feasibility, 3) MHD effects, and 4) pyrochemical reprocessing.

INTRODUCTION

This paper will describe a reference fission suppressed blanket design,¹ and review recent fusion breeder studies. Goals and design choices will be discussed as we go along. Prior to 1979 we studied fast-fission, Pu-producing hybrids.² High energy multiplication allowed economical operation at lower Q

*Work performed under the auspices of the U.S. Department of Energy by the Lawrence Livermore National Laboratory under contract number W-7405-ENG-48.

values^a of 2 to 4 depending on cost of equipment handling recirculating power. The local blanket energy multiplication doubled during the typical 4 year irradiation time which is $7 \text{ MW}\cdot\text{y}/\text{m}^2$ integrated first wall loading producing $2\text{X Pu}/^{238}\text{U}$ at discharge. The designs resulted in fuel forms, power densities, radioactive inventories, and afterheat cooling requirements much like fission reactors. Fissioning hybrids could fuel or support about 5 LWR's of equal thermal power.

In 1978, we started looking into fission-suppressed ^{233}U breeders.³ We prefer ^{233}U over Pu because conventional fission reactors (LWR, HWR and HTGR's) utilize the former much more efficiently, and secondly, ^{233}U can be substituted for ^{235}U with little change in the present day fuel cycle. The fission-suppressed designs resulted in power densities, radioactive inventories and afterheat cooling requirements much like pure fusion reactors. Fission-suppressed hybrids could support about 15 LWR's of the same nuclear power.

BREEDING BLANKET DESIGN

We have made a number of studies of the tandem mirror as a hybrid (interchangeably called fusion breeder). In 1982, we began applying the fission-suppressed blankets to the tokamak.⁴ Any blanket which works on a tokamak will work on a tandem mirror, but the reverse is most definitely not true. The tandem has relatively simple geometry and has a uniform and low magnetic field (4-5 Tesla), whereas the tokamak has pulsed magnetic fields, complex geometry and a nonuniform field with a very high value on the inside of the torus. Fig. 1 illustrates the tandem mirror blanket geometry, and Fig. 2, the tokamak.

Fuel Form - Mobile versus Fixed

In all cases we have mobile fuel (pebbles in these two examples, but molten salt in other examples). The reason for the mobile fuel is so we can remove fissile material without blanket removal before it builds up enough to fission and cause the blanket power to increase significantly. The blankets shown in the figures have the common feature of using pebbles for the following reasons: 1 - dump fuel for safety reasons; 2 - small size of pebbles have less radiation damage; 3 - fuel can be removed at low burnup to reduce power swing (in prior fast-fission designs,² the blanket power density doubles); and 4 - the blanket can last much longer than the fuel lifetime.

^a $(Q = P_{\text{fusion}}/P_{\text{injected}})$

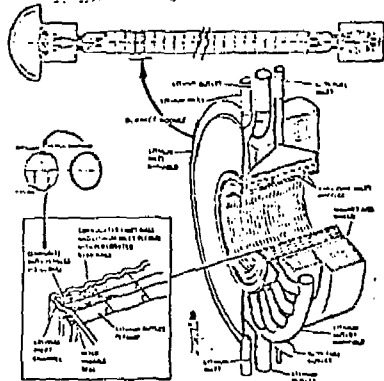


Fig. 1. Tandem mirror fusion breeder blanket. The blanket surrounds the deuterium and tritium plasma which produces neutrons used to breed fissile atoms in the blanket by neutron capture in fertile atoms. The fertile material is thorium in the form of a snap ring attached to the beryllium pebbles which are fed in the top of the pebble bed and out of the bottom every few months. Heat is removed by liquid lithium flowing in and out of the blanket in the pipes shown. Beryllium pebbles serve to multiply neutrons and dilute the fertile pebbles, thereby suppressing fissions.

REFERENCE BLANKET - LIQUID LITHIUM COOLED PEBBLE BED

After an extensive scoping phase, a reference blanket concept described in a detailed report¹ based upon the use of a liquid lithium coolant flowing radially through a two zone packed bed of composite beryllium/thorium pebbles was selected. The design shown in Fig. 1 uses a ferritic steel (i.e., HT-9 or similar) structure and operates in the 350-450°C temperature range. In this concept, the coolant flow resembles that of a conventional oil filter. Specifically, the coolant flows to the first wall plenum through a thin coolant annulus and is distributed to the packed bed through perforations in a corrugated intermediate wall which, in combination with a corrugated first wall and radial stiffeners (tied to the back of the blanket), provides structural support.

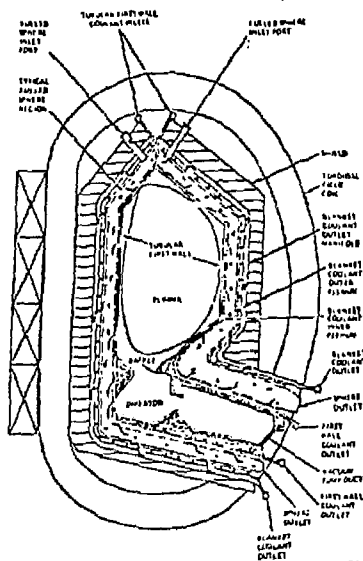


Fig. 2. Cross-section elevation view of a suppressed fission blanket concept for a tokamak reactor (not to scale).

The coolant flows radially outward through two fuel zones (separated by another perforated wall), exits the bed through a third perforated wall outside of the second fuel zone, and exits the blanket through 20 large outlet pipes. The composite fuel pebbles (beryllium pebbles with thorium snap-rings) are loaded into the top of the blanket and discharged at the bottom in a frequent batch process (i.e., fuel residence time ~ 3-6 months).

The reference blanket concept offers several potentially attractive design and performance features:

- o high breeding performance per unit of thermal power production;
- o low decay afterheat and excellent provision for cooling in the event of a loss of coolant or coolant flow accident;

- o a beryllium multiplier form which can be easily fabricated and readily recycled,
- o the extensive use of conventional materials and coolant technologies.

The breeding performance is good for two reasons. First, the design features a high volume fraction of high efficiency neutron multipliers. The bed volume fractions in Fig. 1 include about 55% beryllium, 40% lithium, and 3% thorium -- all excellent neutron multipliers. The remainder of the fuel region following the two corrugated walls is less than 2% steel. Second, the design effectively suppresses the fissioning in the blanket (< 0.04 fission per fusion neutron at 0.5% ^{233}U concentration in thorium). Fast fissions are suppressed due to neutron moderation in the beryllium and low thorium volume fraction. Thermal and epithermal fissions in the bred ^{233}U are suppressed due to fuel discharge at low concentration (< 1%) in the small volume of thorium and due to thermal neutron depletion from the large $1/V$ neutron absorption cross section of the ^6Li in the liquid lithium coolant.

As a result of the low fission rate, the fission product inventories and decay afterheat levels in the fuel are very low. In fact, the fission product decay afterheat is a relatively minor contribution to the total afterheat, and the afterheat associated with the actinide decay chain dominates the overall afterheat level. Typical fission product levels in the discharge fuel are only about 1000 ppm in thorium, or roughly 1/60 that of LWR discharge fuel. These advantages are uniquely associated with fission suppressed blankets since fast-fission blankets, with blanket energy multiplications of 6-10, increase the fission rate by factors of 10-20.

Additional reactor safety benefits for the reference design result from the use of a mobile fuel form (i.e., the composite beryllium/thorium pebbles) with provision to discharge the fuel to an independently cooled dump tank should the need arise. In addition to the primary coolant loop and the dump tank loop, the fuel handling system piping and valving provides a coolant flow sufficient to remove the decay afterheat. Therefore, double redundancy of the cooling systems is provided in the event of a loss of coolant or loss of coolant flow accident.

The composite beryllium/thorium pebble fuel form employed in the reference design provides several advantages in comparison with previous

designs. First, this form provides a relatively simple method to achieve uniform mixing of the beryllium and thorium throughout the blanket - an advantage with respect to the thermal and nuclear breeding performance. Second, the design is relatively insensitive to the high rate of volumetric swelling in beryllium since the beryllium is discharged frequently and the packing density of the bed, although high, is low enough to accommodate some growth (typically 0.2% linear growth occurs over a 90 day irradiation). Finally, the small size of the pebbles (1.5 cm radius) limits the thermal and differential swelling induced stress levels in the beryllium - key lifetime determinates. Our results indicate that an average beryllium in-core lifetime in excess of two years should be easily achievable, but that more materials data and more accurate models are required before a more definitive lifetime estimate will be possible. The reference blanket provides a flexible design which can accommodate a wide variation in the irradiated properties of beryllium without imposing a substantial penalty on the overall level of performance.

Finally, the reference design utilizes conventional and well known materials and coolant technologies. Our selection of ferritic steels was based upon their irradiated and unirradiated materials properties (e.g., high strength, high thermal conductivity, low neutron swelling, excellent liquid metal compatibility) as well as the extensive industrial experience in the fabrication of components from ferritics (principally 2-1/4 Cr-1Mo) and the current interest of the nuclear materials community in these alloys.

Our choice of liquid lithium as the blanket coolant primarily derived from nuclear, heat transfer, and tritium extraction advantages, but also considered the operational and safety implications of liquid lithium versus the obvious alternative, Li_7Pb_{33} . It is our considered opinion that liquid lithium systems can be designed to operate more economically and more reliably than lead-lithium systems and will have the advantage of lower normal tritium releases. An acceptable level of lithium safety appears to be achievable based upon the development of liquid sodium coolant safety systems in the LMFBR program. The recognition that fusion breeder reactors would not, most likely, be sited near population centers (but, rather, in remote safeguarded fuel cycle centers) provides additional confidence in the choice of a liquid lithium coolant.

Our choice of thorium metal as a fertile fuel form rather than thorium dioxide (thoria) or another thorium form is primarily based upon fuel cycle considerations. Although thorium oxide would provide fewer compatibility concerns, thorium metal is less expensive to reprocess (either aqueous or pyrochemical) and is more amenable to the selected fuel form. There is considerable experience in the use of thorium metal in fission reactors.

The direct cost of the plant was estimated at \$374M including \$372M for beryllium and thorium fabrication and reprocessing and had a peak thermal power of 5340 MW. The direct cost of an LWR was estimated at \$785M for 3000 MW_{th}. Thus, the plant cost 2.4 times an LWR. Typical parameters are given in Table 1.

Table 1. Reference Blanket System Parameters

Fusion blanket energy multiplication	3000 MW (15 MW/m)
^{233}U production	1.6 ave. (1.97 peak) 5600 kg/yr
Center cell length	200 m
Center cell mag. field	4.2 T
First wall radius	1.5 m (1.3 MW/m ²)
Li inlet temp.	340°C
outlet	420°C
Pressure on first wall	1.9 MPa or 150 Psi
Structural material	HT-9
Blanket thickness	0.85 m
Shield thickness	0.75 m
Net fissile breeding ratio	0.62
Peak power density	182 W/cm ³ Thorium 5.4 W/cm ³ Be 3.3 W/cm ³ Li
Average fission rate per fusion	0.04
Average fission burnup at fuel discharge	500 MWd/MT
Average net power	1300 MW _e (1660 MW _e peak)
Recirculating power	720 MWe
Fusion power gain (ntrap0)	14.6

Beryllium Pebbles

The reference design calls for beryllium and thorium at a 20 to 1 volume ratio. First we considered a mixture of balls, but experiments carried out by W. S. Neef (see p. 3-37 of ref. 1) with two masses of balls showed a severe segregation problem. To maintain uniformity, we propose using composite balls.

Fig. 3 shows three candidate composite balls. At present we favor the snap-ring composite ball. The disadvantage of these composite balls is the necessity of remotely removing and replacing the snap-ring, and the groove around the beryllium ball could leave it more susceptible to radiation damage.

Beryllium Lifetime

The expected lifetime of the Be pebbles, discussed more fully in ref. 5, is predicted to be greater than $2 \text{ MW}\cdot\text{y}/\text{m}^2$.

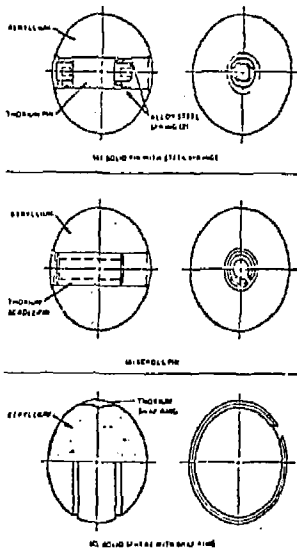


Fig. 3. Beryllium/Thorium composite fuel form options.

Beryllium Radiation Damage Experiments

Beryllium samples irradiated in EBR-II for about 5 years to a fluence of $1 \times 10^{22} \text{ n/cm}^2$ ($E > 1 \text{ MeV}$) at a temperature of 450°C have been analyzed.⁶ The samples showed a decrease in ductility and swelled, but at an equivalent of about $2 \text{ MW}\cdot\text{y}/\text{m}^2$ they maintained their

integrity, leading us to believe that we can get enough lifetime before remanufacturing is necessary to be economically viable. Irradiation of beryllium should be carried out with high energy neutrons from FMIT (Fusion Materials Irradiation Test Facility) or a fusion engineering test facility such as the proposed TDF.⁷

Beryllium Material Compatibility

Beryllium will attack many other metals by interdiffusion and forming compounds. The rate is highly temperature dependent. Experiments carried out at ORNL show that beryllium in contact with 316-SS with liquid lithium will be compatible with steel below 500°C . The same type of tests at TRW with sodium were carried out. Thorium will be included in these ongoing compatibility experiments. This work also discusses the use of coatings for inhibiting mass transport and weight loss. This subject is discussed in refs. 1 and 8.

ALTERNATIVE BLANKET COOLANTS

Helium Cooling. Ability to keep radioactive contaminants at a low level is the big virtue of helium coolant. Corrosion is only by impurities and neutronics are unaffected by the low density of helium. The large film temperature drop and low heat capacity are disadvantages. The high pressure, about 50 atmospheres, is a disadvantage in that it leads to increased structural material which hurts the neutron economy. The blankets shown in Figs. 1 and 2 can be modified to be helium cooled using the naturally tensioned skin containment structure shown in Fig. 4, which was adapted from ref. 9.

Water Cooling. Water, if used as a coolant, must occupy less than 10% of the volume of a blanket to minimize moderation of neutrons before neutron multiplication reactions occur. If the water temperature is kept low ($< 100^\circ\text{C}$), good breeding occurs because little structural material is needed to contain the water, and tritium diffusion into the water can be kept small. Such a blanket suffers economically from lack of electricity production, but will have a lower plant cost and higher plant availability due to the simpler, low-temperature balance of plant, and will also incur low technological risk. Modest temperature water-cooled blankets deserve more attention.

Molten Salt Cooling. Use of molten salt as a coolant has not worked out well for three reasons:

- 1) The hot spot temperatures usually require refractory metals such as TZM.

2) The large amount of fluorine hurts neutron economy.

3) The salt must not come into contact with the beryllium or else bred uranium will deposit on the beryllium balls causing hot spots. Coatings would be attacked at pin hole defects.

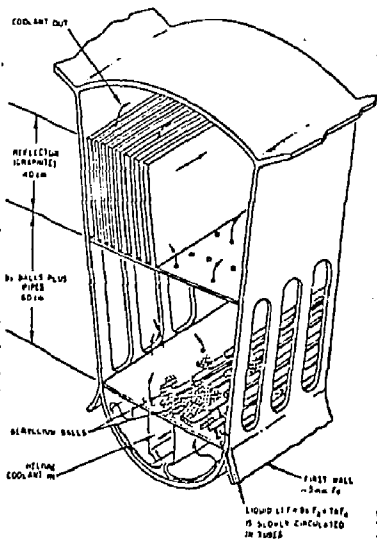


Fig. 4. Helium cooled blanket. This blanket will work in either the Tandem Mirror geometry (Fig. 1) or the Tokamak geometry (Fig. 2). This figure also shows the breeding concept using molten salt which slowly circulates in the pipes.

PIPE BLANKET ALTERNATIVE

The use of pipes in the blanket has the advantage of forming a barrier to radionuclides much as the clad of conventional fission reactor fuel. In the case of the blanket shown in Fig. 4,

the coolant is helium and the pipes contain the fertile fuel along with actinides, tritium and fission products. The small amount of radionuclides in the helium such as trace amounts of tritium and activated corrosion products can be kept to a low level. Another pipe design has the coolant flowing in the pipes and a static or slowly circulating liquid metal in the fuel pebble bed to conduct the heat into the pipes.¹³

MOLTEN SALT BLANKET ALTERNATIVE

In 1969, Lidsky discussed a molten salt fission-suppressed breeder.¹⁰ The liquid ⁷Li as the neutron multiplier gave a local breeding ratio of 1.45 (T+F). The structural material was TZM, and the cooling was both by liquid lithium and molten salt.

In 1977, Bjlinkin and Novikov suggested replacing the ⁷Li neutron multiplier with beryllium¹¹ which gave a local breeding ratio of 1.63. In 1978, Lee¹² reported on a homogeneous one-zone design in which the local breeding ratio was 2.2. A rather detailed study in 1979 uncovered problems with fabrication of TZM, radiation damage to the beryllium and to the graphite cladding of beryllium.³ In 1981, a design with steel was used to contain the molten salt where corrosion was virtually eliminated by keeping the steel cool.¹³ However, it used ⁷Li instead of Be to produce excess neutrons, thus its breeding was only 1.5.

We are now considering a design using helium as the coolant with the thorium containing salt in pipes somewhat like the helium cooled pipe design of ref. 9. Corrosion is inhibited by a frozen salt layer on the inside of the pipe or at least a salt-steel interface temperature which is cool enough. This design concept (see Fig. 4) looks promising in that it could be a relatively low technology, high performing, economical fusion breeder.

BREEDING RATIO AND LWR SUPPORT RATIO

We define the support ratio as the number of fission reactors which can be fueled by one fusion breeder where each reactor has the same nuclear power. We assume the ²³⁵U makeup for a conventional LWR is 460, 320 or 300 kg for each full power 1 GWe year of operation on the denatured uranium cycle (²³⁵U + ²³⁹U with Pu recycled), the denatured thorium cycle (²³⁵U + Th + ²³⁵U with Pu recycled) or the thorium cycle (²³⁵U + Th), respectively.

This ^{233}U consumption rate at 33% thermal efficiency becomes 0.15, 0.125, and 0.10 kg $^{233}\text{U}/\text{MWe}\cdot\text{year}$.

In each fusion reaction, the nuclear energy release is $14.1 \text{ MeV} \times \text{H} + 3.52 \text{ MeV}$. The number of fissile atoms bred is F and fusile (tritium) atoms is T. If T equals 1.05 and the beryllium blanket has an average energy multiplication of 1.6, then each fusion reaction results in F fissile atoms bred and 26 MeV energy release. The fissile production for ^{233}U is then:

$$\begin{array}{r} -27 \\ \text{F } 233 \times 1.67 \times 10 \text{ kg} \times 3600 \text{ sec} \quad 24 \text{ hr} \quad 365 \text{ d} \\ -19 \quad \text{hr} \quad \text{d} \quad \text{y} \\ 26 \text{ MeV} \times 1.6 \times 10 \text{ } \$/\text{eV} \end{array}$$

$$= \frac{2.95 \text{ F kg } ^{233}\text{U}}{\text{MW}\cdot\text{yr}}$$

The support ratio then is 19 F, 23.6 F, and 29.5 F for the three different fuel cycles. For the reference design shown in Fig. 1, the breeding ratio is 0.60 (T+F = 1.65). The support ratios on the three LWR fuel cycles then are 12, 14, and 18. It may be possible with improved design to increase the breeding ratio to 0.75 (T+F = 1.8) or more. The support ratios would then become: 15, 18, and 22.

ECONOMICS

There are a number of ways of looking at the economics of a fusion breeder:

1 - Incremental System Electricity Cost

If the fusion breeder costs 2.5 times as much as a LWR of equal nuclear power and produces as much electricity, and supports 11 LWRs, then the system cost per unit power ratio is:

$$\frac{2.5 + 12}{1 + 12} = 1.115$$

The incremental cost of the electrical producing system was 12.5% which represents the extra cost of the fusion breeder fuel source. Using a discounted cash flow method (p. 8-38, ref. 1), the incremental cost of electricity varies from 5% to 11% depending on assumptions made. Fig. 5 shows the average present value of the system electricity cost versus Q for the reference design. We can see that Q should be equal to or greater than about 6 so that the recirculating power does not significantly add to the product cost.

2 - Equivalent Cost of $\text{U-}^{235}\text{g}$

The cost of the material produced in the reference design is equivalent to a 30-year discounted average of \$165/kg $\text{U-}^{235}\text{g}$ (\$75 per pound). The price of $\text{U-}^{235}\text{g}$ reached a high of over \$40 per pound in 1978. This would be about \$60 in 1983 dollars. The price of uranium at present is depressed to under \$30 per pound; however, many people predict the price may be well over \$100 per pound early in the next century (only 17 years from now!).

3 - Cost of ^{233}U (or Pu) per gram

The present value of ^{233}U averaged over 30 years in our model (pp. 8-30, ref. 1) is \$93/g.

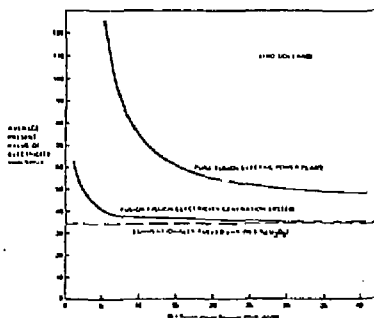


Fig. 5. The cost of electricity for fusion-fission electricity generation and fusion electric versus the fusion gain.

BURNER REACTOR FUEL CYCLE

Either ^{233}U or Pu can be produced. We prefer ^{233}U because of its higher utilization efficiency in thermal neutron spectrum reactors and because suppression of fissioning is easier, the fast-fission cross-section is 2 to 3 times lower for ^{232}Th than for ^{238}U .

The four fuel cycles for use of ^{233}U or Pu are:

- 1 - $^{233}\text{U} + ^{238}\text{U}$: denatured uranium fuel cycle
- 2 - $^{233}\text{U} + \text{Th} + ^{238}\text{U}$: denatured thorium fuel cycle
- 3 - $^{233}\text{U} + \text{Th}$: thorium fuel cycle
- 4 - $\text{Pu} + ^{238}\text{U}$: plutonium fuel cycle

The first fuel cycle is unique in that it is almost indistinguishable from the present day fuel - $^{235}\text{U} + ^{238}\text{U}$. No thorium chemistry is needed whatsoever in the burner fission reactor's fuel cycle. It's one in which no readily accessible materials are available for weapons manufacture, and therefore it would be suitable for supplying reactors in foreign countries with the spent fuel being shipped back for reprocessing. Reprocessing of spent fuel is necessary for good fuel utilization efficiency. The first two fuel cycles produce Pu. This bred Pu could then be recycled in Pu burning reactors on the fourth fuel cycle. ^{232}U is produced in small quantities along with ^{230}U . Associated with ^{232}U is gamma radiation emitters which require shielded handling - an expense which, however, makes this fuel much less suitable for weapons use than plutonium. The third fuel cycle is the most fuel efficient. These fuel cycles are discussed more fully in the fusion breeder context in Chapter 7 of ref. 1.

FUSION BREEDER FUEL CYCLE

The feed stock for the blanket of the fusion breeder will either be Th or ^{238}U . The discharge will be Th + ^{233}U + fission products or ^{238}U + Pu + fission products. As mentioned earlier, there will be small quantities of other elements, for example, ^{232}U or ^{238}Pu .

REPROCESSING OF FUSION BREEDER FUEL

In order to suppress fissioning of bred fuel the concentration must be kept low, usually less than 1% of the fertile in the fission suppressed case. Therefore, a goal is low cost reprocessing so that we can afford to reprocess at this low fissile concentration. Aqueous reprocessing of Pu (Purex) or Thorium (Thorex) fuels are well known and expensive processes utilizing oxide fuel forms. Pyrochemical (or pyrometallurgical) processes are well founded in laboratory scale proof tests and have the potential to save almost an order of magnitude on reprocessing costs. The preferred solid fuel form is metallic, or in the case of molten salt in which fluorination should be a straightforward low-cost process, the form is ThF_4 . The molten salt case should have the lowest fuel cycle costs as well as allow for on line refueling and reprocessing.

D-D CYCLE FUSION BREEDERS

For the same fusion power on the D-D cycle, fusion breeders can produce almost twice the

amount of material as can D-T cycle fusion breeders. However, this gain is approximately offset by the increased cost per unit power of D-D fusion over D-T fusion based on a particular example of a breeding version of the Wildcat and Starfire Tokamak studies, according to a recent study by Greenspan and Miley.¹⁴ Even though D-D fusion would make a better breeder, the more advanced fusion technology required might make this a somewhat later rather than an early application of fusion. The fusion reaction rate can be enhanced by polarization. The enhancement is more for D-D than for D-T, hence the D-D fusion breeder might gain an edge over the D-T fusion breeder.

DEVELOPMENT

During the next 10 to 15 years, the pacing or long lead time items for the fusion breeder is fusion technology itself. Blanket technologies if not addressed early in the program can become pacing items. To prove fusion breeders will be practical, an expanded studies and experimental program is needed. The ultimate proof test of breeding blanket technology will require exposure to 14 MeV neutrons up to fluences of at least $5 \text{ MW}\cdot\text{y}/\text{m}^2$ at a wall loading greater than $1 \text{ MW}/\text{m}^2$. This subject has been studied in an EPRI sponsored fusion breeder development study for tandem mirrors,¹⁵ tokamaks,¹⁶ and inertial fusion.¹⁵

Fusion research and development has become costly because the size of experimental facilities is large and getting larger (e.g., TFTR ~ \$0.5 B, MFTF-B ~ \$0.2 B). The fusion breeder could be an early application of fusion research and development which would help justify the large expenditures which will be necessary to construct and operate even larger facilities in the future.

DEPLOYMENT

As discussed earlier, the fusion breeder produces primarily fuel 5600 kg/y compared, for example, to an equal size fission breeder that would produce 220 kg/y at a breeding ratio of 1.2. The question we have posed is how early an impact and how large an impact can the fusion breeder have when the long predicted uranium shortage forces breeding technology to be deployed.

We show as an illustrative example how fusion can go through an orderly set of development steps and expand, limited by traditional, new technology learning curves. Our example shows how 50% of the projected

electrical demand in the year 2050 can be met by nuclear with the help of the fusion breeder. A possible set of development steps are shown below:

- o Integral neutronic tests to verify breeding: TFTR, mid-1980s and
- o Heat removal at temperature: Tritium burning upgrade of MFTF-B, early 1990s and
- o Blanket component and material lifetime testing, ^b 1-10 MW_{th}/m²; Engineering Test Reactor, ^c start mid-1990s and
- o Prototypic blanket testing and system demonstration with breakeven or better power > 1000 kg ²³³U/yr (production rate): Fusion Power Demonstration, Phase 1, mid-1990s Phase 2, 2000
- o First commercial size fusion breeder > 6 Tones ²³³U/yr by 2015

We assume based on successful operation of the first commercial fusion breeder starting in 2015 and a clear need for fuel, that 5 more units could be ordered and put into operation by 2030 providing fuel for over 120 GW_e of LWRs. By 2040 (15% growth rate), there could be 24 fusion breeders providing fuel for 500 GW_e of LWRs. By comparison to LMFBR (Liquid Metal Fast Breeder Reactor) deployment, we assume the first commercial LMFBR to be operational in 2005 in the U.S. By 2020 five more plants could be put in operation, accounting for 9 GW_e. At a 15% growth rate, there would be 36 GW_e of LMFBRs by 2030 and 150 GW_e in 2040. In summary, by 2030 the high LWR support ratio of the fusion breeder could provide about a 10-year lead in deployment relative to the LMFBR, and by 2050, 50% of the electrical demand could be met by fusion breeder supported LWRs.

^bMaterial testing can be carried out concurrently with the following step, or with some delay and extra risk but lower total cost, the material testing can be carried out in the prototypic blanket testing facility.

^cThis machine could be based on a tandem mirror operated at 25 MW fusion such as TDF or a tokamak operated at 250 MW of fusion power such as FED-R.

CONCLUSION

Fusion breeder studies, being carried out with increasing attention to details, are laying the foundation for an early and economic application of fusion. The concept of fission-suppression has been shown to be advantageous due to its extra safety. The fission-suppressed fusion breeder is fast to deploy due to its extra high support-ratio, and it is based on relatively modest extensions of conventional nuclear technology. Experimental studies are needed to resolve key issues such as establishing material compatibility by carrying out tests on liquid metal loops including MHD effects, integral neutronics tests to verify breeding predictions, and verify pyrochemical processing of low fissile discharge fuels. We show how fusion by breeding can allow nuclear to expand to 50% of the electrical demand by 2050, for example, if needed.

We are presently including in our work fissioning blankets whose goal is to achieve good safety and economics by the use of pebble fuel. Such designs could make a fusion breeder practical based on fusion performance, which can practically be guaranteed to be achieved.

REFERENCES

1. D. H. BERWALD, et al., "Fission-Suppressed Hybrid Reactor - The Fusion Breeder," UCID-1963B, Lawrence Livermore National Laboratory (December 1982).
2. D. J. BENDER, et al., "Reference Design for the Standard Mirror Hybrid Reactor," UCRL-52478 or GA-A14796, Lawrence Livermore National Laboratory and General Atomic Company (1978).
3. R. W. MOIR, et al., "Tandem Mirror Hybrid Reactor Design Study Final Report," UCID-1880B, Lawrence Livermore National Laboratory (1980).
4. D. GRADY, et al., "Preliminary Conceptual Design Study of a Suppressed Fission Tokamak Hybrid," UCID-19733, Lawrence Livermore National Laboratory (1982); also article by D. Grady in this issue.
5. L. G. MILLER, J. H. BEESTON, P. Y. HSU, and B. L. HARRIS, "Lifetime Analysis of Beryllium Balls in a Hybrid Fusion Blanket," Nuclear Technology/Fusion, these Proceedings.

6. J. M. BEESTON, L. G. MILLER, E. L. WOOD, JR., and R. W. MOIR, "Comparison of Compression Properties and Swelling of Beryllium Irradiated at Various Temperatures," Submitted to Third Topical Meeting on Materials for Fusion Conference, Sept. 19-22, 1983, Albuquerque, NM.

7. K. J. THOMASSEN and J. H. DOGGETT, "A Technology Demonstration Facility," submitted to Journal of Fusion Energy (1983); also, J. H. DOGGETT, "Tandem Mirrors for Neutron Production," these Proceedings.

8. J. H. DEYAN, P. F. TORTORELLI, and J. R. OGBREN, "Materials Compatibility Considerations for Fusion-Fission Hybrid Reactor Design," Nuclear Technology/Fusion, these Proceedings.

9. E. T. CHENG, C. P. C. WONG, P. L. CREEDON, and K. R. SCHULTZ, "A New Fusion Breeder Blanket Design Approach Utilizing a Thorium Multiplier," Summary submitted for presentation at the 1983 ANS Annual Meeting, Detroit, Michigan (June 1983).

10. L. M. LIDSKY, "Fission-Fusion Symbiosis: General Considerations and a Specific Example," Proc. Br. Nuc. Energy Soc. Nucl. Fusion Reactor Conf., (Culham Lab, 1969), pp. 41-53, Culham Laboratory Report CLM-MFT 1969.

11. V. L. BLINKIN and V. M. HOVIKOV, "Optimal Symbiotic Molten-Salt Fission-Fusion System," IAE 2119, Kurchatov (1977).

12. J. D. LEE, "The Beryllium/Molten Salt Blanket," Proc. Third US/USSR Symposium on Fusion-Fission, Princeton, UCRL-82663, Lawrence Livermore National Laboratory (January 1979).

13. J. D. LEE, et al., "Feasibility Study of a Fission-Suppressed Tandem-Mirror Hybrid Reactor," UCID-19327, Lawrence Livermore National Laboratory (1982).

14. GREENSPAN, S. and MILEY, G. H., "Tritium Assisted D-D Based Fusion Breeders," these Proceedings.

15. D. H. BERNALD, R. B. CAMPBELL, S. A. FREIJE, J. K. GARNER, S. L. SALEM, and W. G. STEELE, "Hybrid Reactor Development Planning," submitted to Nuclear Technology/Fusion.

16. G. GIBSON, D. SINK and L. GREEN, "Alternative Technological Pathways for Tokamak Fusion," Nuclear Technology/Fusion, these Proceedings.

17. N. M. GHONIEM and D. H. BERNALD, "Analysis of Blanket-Structure Lifetime for the Tandem Mirror Hybrid Reactor (TMHR)," Nuclear Technology/Fusion, these Proceedings.

18. J. D. LEE, "Neutronics of a Be-Li-Th Blanket for the Fusion Breeder," Nuclear Technology/Fusion, these Proceedings.

DISCLAIMER

This document was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor the University of California nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial products, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government thereof, and shall not be used for advertising or product endorsement purposes.