

24/92 850



AD _____
ORNL/TM-11759

**OAK RIDGE
NATIONAL
LABORATORY**



Characterization of Rocket Propellant Combustion Products

Chemical Characterization and Computer Modeling of the Exhaust Products from Four Propellant Formulations

R. A. Jenkins

- | | |
|----------------|---------------|
| C. W. Nestor | C. Y. Ma |
| C. V. Thompson | B. A. Tomkins |
| T. M. Gayle | R. L. Moody |

MANAGED BY
MARTIN MARIETTA ENERGY SYSTEMS, INC.
FOR THE UNITED STATES
DEPARTMENT OF ENERGY

DISTRIBUTION OF THIS DOCUMENT IS UNLIMITED

This report has been reproduced directly from the best available copy.

Available to DOE and DOE contractors from the Office of Scientific and Technical Information, P.O. Box 62, Oak Ridge, TN 37831; prices available from (615) 576-8401, FTS 626-8401.

Available to the public from the National Technical Information Service, U.S. Department of Commerce, 5285 Port Royal Rd., Springfield, VA 22161.

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

CHARACTERIZATION OF ROCKET
PROPELLANT
COMBUSTION PRODUCTS

SUBTITLE:
CHEMICAL CHARACTERIZATION AND COMPUTER
MODELING OF THE EXHAUST PRODUCTS FROM
FOUR PROPELLANT FORMULATIONS

Final Report

DOE Interagency Agreement No. 1016-1844-A1
Project Order No. 87PP8774

December 9, 1991

Principal Investigator: R. A. Jenkins
Primary Contributors: C. W. Nestor, C. V. Thompson,
T. M. Gayle, C. Y. Ma, B. A. Tomkins, and R. L. Moody

Analytical Chemistry Division
Oak Ridge National Laboratory
P. O. Box 2008
Oak Ridge, Tennessee 37831-6120
(615) 576-8594

Ms. Karen Fritz
Chief, Acquisition Management Liaison Office
U.S. Army Biomedical Research and Development
Laboratory, Fort Detrick,
Frederick Maryland 21701-5010

COR: Major John Young

MASTER

REPORT DOCUMENTATION PAGE

Form Approved
OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.

1. AGENCY USE ONLY (Leave blank)		2. REPORT DATE December 31, 1990	3. REPORT TYPE AND DATES COVERED Final Report, 9/23/87 - 4/1/90
4. TITLE AND SUBTITLE CHARACTERIZATION OF ROCKET PROPELLANT COMBUSTION PRODUCTS Subtitle: Chemical Characterization and Computer Modeling of the Exhaust Products from Four Propellant Formulations		5. FUNDING NUMBERS APO 87PP8774 PE - 62720A PR - 3M162720A835 TA - 00 WUDA314033	
6. AUTHOR(S) R. A. Jenkins, C. W. Nestor, C. V. Thompson, T. M. Gayle, C. Y. Ma, B. A. Tomkins, R. L. Moody			
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) U.S. Department of Energy Oak Ridge Operations Office P.O. Box 2001 Oak Ridge, Tennessee 37831-8622		8. PERFORMING ORGANIZATION REPORT NUMBER ORNL/TM-11759 DOE IA No. 1016-1844-A1	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) U.S. Army Medical Research and Development Command Fort Detrick, Frederick, Maryland 21702-5012 U.S. Army Biomedical Research and Development Laboratory Fort Detrick, Frederick, Maryland 21702-5012		10. SPONSORING/MONITORING AGENCY REPORT NUMBER	
11. SUPPLEMENTARY NOTES			
12a. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited		12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words) The objective of this work was the determination of the chemical composition of exhaust products from the firing of scaled down rocket motors at the Army Signature Characterization Facility at Redstone Arsenal, and the comparison of those results with component levels predicted by a selected computer model. Both real time and off-line sampling and analysis approaches were employed. Four types of propellant compositions were evaluated. CO levels ranged from 85 - 350 ppm, while particle concentrations ranged from 30 - 100 mg/m ³ . All of the airborne particles were in the inhalable range. For two of the propellants, airborne lead was greater than 10 mg/m ³ . For the predominantly perchlorate formulation, hydrogen chloride (HCl) levels were greater than 100 ppm. Particulate PAH levels were about a factor of 10 lower than that in outside ambient air particulate matter. The computer model predicted mole fractions for CO were typically 20 - 35%, except for the predominantly inorganic formulation. The model correctly predicted only minor amounts of ammonia and essentially no hydrogen cyanide. The accuracy of the predicted CO/CO ₂ ratios was low for all but one of the formulations. A modification of the model accomplished by mathematically accounting for mixing of hot exhaust gases with ambient air brought the predicted CO/CO ₂ ratio into greater agreement with that which was observed experimentally.			
14. SUBJECT TERMS Propellants; Chemical Characterization; Computer Modeling of Combustion Products; RA III; PO			15. NUMBER OF PAGES
			16. PRICE CODE
17. SECURITY CLASSIFICATION OF REPORT Unclassified	18. SECURITY CLASSIFICATION OF THIS PAGE Unclassified	19. SECURITY CLASSIFICATION OF ABSTRACT Unclassified	20. LIMITATION OF ABSTRACT Unlimited

GENERAL INSTRUCTIONS FOR COMPLETING SF 298

The Report Documentation Page (RDP) is used in announcing and cataloging reports. It is important that this information be consistent with the rest of the report, particularly the cover and title page. Instructions for filling in each block of the form follow. It is important to *stay within the lines* to meet optical scanning requirements.

Block 1. Agency Use Only (Leave blank).

Block 2. Report Date. Full publication date including day, month, and year, if available (e.g. 1 Jan 88). Must cite at least the year.

Block 3. Type of Report and Dates Covered. Indicate whether report is interim, final, etc. If applicable, enter inclusive report dates (e.g. 10 Jun 87 - 30 Jun 88).

Block 4. Title and Subtitle. A title is taken from the part of the report that provides the most meaningful and complete information. When a report is prepared in more than one volume, repeat the primary title, add volume number, and include subtitle for the specific volume. On classified documents enter the title classification in parentheses.

Block 5. Funding Numbers. To include contract and grant numbers; may include program element number(s), project number(s), task number(s), and work unit number(s). Use the following labels:

C - Contract	PR - Project
G - Grant	TA - Task
PE - Program Element	WU - Work Unit Accession No.

Block 6. Author(s). Name(s) of person(s) responsible for writing the report, performing the research, or credited with the content of the report. If editor or compiler, this should follow the name(s).

Block 7. Performing Organization Name(s) and Address(es). Self-explanatory.

Block 8. Performing Organization Report Number. Enter the unique alphanumeric report number(s) assigned by the organization performing the report.

Block 9. Sponsoring/Monitoring Agency Name(s) and Address(es). Self-explanatory.

Block 10. Sponsoring/Monitoring Agency Report Number. (If known)

Block 11. Supplementary Notes. Enter information not included elsewhere such as: Prepared in cooperation with...; Trans. of...; To be published in... When a report is revised, include statement whether the new report supersedes or supplements the older report.

Block 12a. Distribution/Availability Statement. Denotes public availability or limitations. Cite any availability to the public. Enter additional limitations or special markings in all capitals (e.g. UNCLASSIFIED, REL, ITAR).

- DOD - See DoDD 5230.24, "Distribution Statements on Technical Documents."
- DOE - See authorities.
- NASA - See Handbook NHB 2200.2.
- NTIS - Leave blank.

Block 12b. Distribution Code.

- DOD - Leave blank.
- DOE - Enter DOE distribution categories from the Standard Distribution for Unclassified Scientific and Technical Reports.
- NASA - Leave blank.
- NTIS - Leave blank.

Block 13. Abstract. Include a brief (*Maximum 200 words*) factual summary of the most significant information contained in the report.

Block 14. Subject Terms. Keywords or phrases identifying major subjects in the report.

Block 15. Number of Pages. Enter the total number of pages.

Block 16. Price Code. Enter appropriate price code (*NTIS only*).

Blocks 17. - 19. Security Classifications. Self-explanatory. Enter U.S. Security Classification in accordance with U.S. Security Regulations (i.e., UNCLASSIFIED). If form contains classified information, stamp classification on the top and bottom of the page.

Block 20. Limitation of Abstract. This block must be completed to assign a limitation to the abstract. Enter either UL (unlimited) or SAR (same as report). An entry in this block is necessary if the abstract is to be limited. If blank, the abstract is assumed to be unlimited.

ARMY PROJECT ORDER NO: 87PP8774

DOE Interagency Agreement No. 1016-1844-A1

TITLE: CHARACTERIZATION OF ROCKET PROPELLANT COMBUSTION PRODUCTS

SUBTITLE: CHEMICAL CHARACTERIZATION AND COMPUTER MODELING OF THE EXHAUST PRODUCTS FROM FOUR PROPELLANT FORMULATIONS

PRINCIPAL INVESTIGATOR: R. A. Jenkins
PRIMARY CONTRIBUTORS: C. W. Nestor, C. V. Thompson, T. M. Gayle
C. Y. Ma, B. A. Tomkins, R. L. Moody

CONTRACTING ORGANIZATION: U.S. Department of Energy
Oak Ridge Operations Office
P. O. Box 2001
Oak Ridge, Tennessee 37831-8622

REPORTED DATE: December 9, 1991

TYPE OF REPORT: Final Report

SUPPORTED BY: U.S. ARMY BIOMEDICAL RESEARCH AND DEVELOPMENT
COMMAND
Fort Detrick, Frederick, Maryland 21701-5010

PREPARED FOR: Contracting Officer's Representative
U.S. Army Biomedical Research and Development Laboratory
Fort Detrick, Frederick, Maryland 21702-5010
Major John Young, Contracting Officer's Representative

DISTRIBUTION STATEMENT: Approved for public release: distribution unlimited

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized document.

Page intentionally left blank.

FORWARD

Opinions, interpretations, conclusions and recommendations are those of the author and are not necessarily endorsed by the U.S. Army.


X Where copyrighted material is quoted, permission has been obtained to use such material.

X Where material from documents designated for limited distribution is quoted, permission has been obtained to use the material.

X Citations of commercial organizations and trade names in this report do not constitute an official Department of the Army endorsement or approval of the products or services of these organizations.

N/A In conducting research using animals, the investigator(s) adhered to the "Guide for the Care and Use of Laboratory Animals," prepared by the Committee on Care and Use of Laboratory Animals of the Institute of Laboratory Animal Resources, National Research Council (NIH Publication No. 86-23, Revised 1985).

N/A For the protection of human subjects, the investigator(s) have adhered to policies of applicable Federal Law 45CFR46.

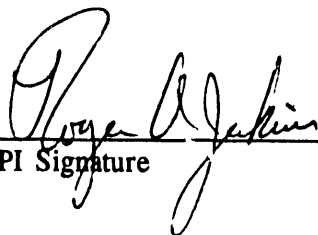
PI Signature _____ Date December 20, 1991

Page intentionally left blank.

EXECUTIVE SUMMARY

The overall objective of the work described in this report is four-fold: to a) develop a standardized and experimentally validated approach to the sampling and chemical and physical characterization of the exhaust products of scaled-down rocket launch motors fired under experimentally controlled conditions at the Army's Signature Characterization Facility (ASCF) at Redstone Arsenal in Huntsville, Alabama; b) determine the composition of the exhaust products; c) assess the accuracy of a selected existing computer model for predicting the composition of major and minor chemical species; d) recommend alterations to both the sampling and analysis strategy and the computer model in order to achieve greater congruence between chemical measurements and computer prediction.

Analytical validation studies were conducted in small chambers at the Oak Ridge National Laboratory (ORNL), while the actual firings were conducted at Redstone Arsenal. Real time determination of selected species was performed by a variety of techniques, including non-dispersive infrared spectrometry, chemiluminescence, electrochemical monitoring, and optical scattering. Samples for analyses of trace constituents were collected from individual firings in the ASCF, and returned to ORNL for analysis, usually by gas chromatography/mass spectrometry. Four types of propellants were examined: a double base, a double base with 8% potassium perchlorate, one propellant which was predominantly ammonium perchlorate, and a minimum signature reduced smoke propellant, which was about two-thirds octahydro-1,3,5,7-tetranitro-1,3,5,7-tetrazocine (HMX). Small, 2x2 motors, containing 25 - 75 g of propellant, produced significant quantities of carbon monoxide (CO) and particles when fired into the 20 m³ chamber. CO levels ranged from 85 - 350 ppm. This is equivalent to reaching 2500 - 7500 ppm if a full scale motor was fired in a similarly sized enclosed environment. Particle concentrations ranged from 30 - 100 mg/m³. All of the airborne particles were in the inhalable range. For two of the propellants (the double base and the minimum signature), airborne lead was greater than 10 mg/m³. No ammonia or hydrogen cyanide was detected above 1 ppm. For the predominantly perchlorate formulation, hydrogen chloride (HCl) levels were greater than 100 ppm in the ASCF chamber. Because of the relatively high background levels observed, trace organic vapor phase constituents were difficult to accurately quantify. While a wide variety of trace constituents were observed, only a few were present at levels greater than a few ppbv. Compounds present at levels greater than 10 µg/m³ included benzene, methyl crotonate, toluene, and cyanobenzene. A number of PAHs and nitrofluorene were observed in the airborne particulate matter. However, the levels were about a factor of 10 lower than that in outside ambient air particulate matter at a military installation.

Computer modeling was performed with the NASA-Lewis CET-86 version. This approach obtains estimates of equilibrium concentrations by minimizing free energy. Mole fractions of major and minor species were estimated for a range of exit/throat area ratios. The predicted mole fractions for CO were typically 20 - 35%, except for the predominantly inorganic formulation. The model correctly predicted only minor amounts of ammonia

and essentially no hydrogen cyanide. Predicted mole fractions did not vary a great deal with such input parameters as exit/throat area ratios or small changes in the heats of formation of the various compositions. The accuracy of the predicted CO/CO₂ ratios was low for all but one of the formulations. In general, if the model were to be used in its present state for health risk assessments, it would be likely to over-estimate exposure to CO.

Probably the greatest limitation of the model is its inability to account for reactions after hot exhaust gases leave the rocket motor nozzle. For example, the model predicted no significant quantities of NO would be produced, yet such was measured at ppm levels on every burn. A modification of the model accomplished by mathematically accounting for mixing of hot exhaust gases with ambient air brought the predicted CO/CO₂ ratio into greater agreement with that which was observed experimentally. It seems likely that with the appropriate modifications to account for the roles of kinetically governed processes and the afterburning of exhaust gases, the model could make a more accurate prediction of the amounts of the major products. However, it seems unlikely for the system to be modifiable to the extent to which accurate predictions of toxic or carcinogenic species present at the ppbv level could be made.

TABLE OF CONTENTS

Forward	1
Executive Summary	3
Table of Contents	5
List of Tables	7
List of Figures	11
Acknowledgement	12
I. Objectives	13
II. Background	13
Part 1: Chemical Characterization Studies	
Experimental	15
Results and Discussion	15
Summary and Recommendations - Part 1	35
Part 2: Modeling for Health Hazard Prediction	
Introduction	37
Results and Discussion	39
Limitations and Modifications	46
Recommendations for Futher Work	52
References	53
Appendix A	56
Seleted Rocket Propellant Formulations	
Appendix B	61
Trace Organic Vapor Phase Constituents Observed In Selected Rocket Exhaust Atmospheres	

TABLE OF CONTENTS (Cont'd)

Appendix C 69
 Output from Selected Runs of Computer Model NASA-Lewis CET-86
Distribution List 121

<u>Table</u>	<u>LIST OF TABLES</u>	<u>Page</u>
1	Summary of Sampling and Analysis Strategy for Rocket Exhaust Constituents at ASCF	17
2	Summary of Characterization Data Composition D Major Constituents	20
3	Summary of Characterization Data Composition H Major Constituents	21
4	Summary of Characterization Data Composition L Major Constituents	22
5	Summary of Characterization Data Composition Q Major Constituents	23
6	Mean Concentrations Achieved in ASCF Chamber	24
7	Particle Size Distribution Rocket Exhaust Particulate Matter Mean Values	26
8	Concentration of Selected Constituents in Chamber Blanks	27
9	Estimated Concentration of Trace Vapor Phase Constituents Composition D	29
10	Estimated Concentration of Trace Vapor Phase Constituents Composition H	30
11	Estimated Concentration of Trace Vapor Phase Constituents Composition L	31
12	Estimated Concentration of Trace Vapor Phase Constituents Composition Q	31
13	Non-Siloxane Vapor Phase Compounds Present in Motor Exhausts at Concentrations Greater Than 10 $\mu\text{g}/\text{m}^3$ in ASCF Chamber	32
14	Concentrations ($\mu\text{g}/\text{g}$) of Nitro-PAH and PAH in Particulate Matter Collected on Course Filters at ASCF Compared with Outdoor Air Particulate at US Army Installation	34
15	Exit/Throat Area Ratio Ranges Test Motor Configurations	38
16	Predicted Mole Fractions as a Function of Exit/Throat Area Ratios Composition D	40

LIST OF TABLES (Cont'd)

<u>Table</u>		<u>Page</u>
17	Predicted Mole Fractions as a Function of Exit/Throat Area Ratios Composition H	41
18	Predicted Mole Fractions as a Function of Exit/Throat Area Ratios Composition L	42
19	Predicted Mole Fractions as a Function of Exit/Throat Area Ratios Composition Q	43
20	Effect of $\pm 5\%$ Shift in Heat of Formation of Ammonium Perchlorate Composition L - Predicted Mole Fractions	45
21	Comparison of Observed and Predicted Carbon Monoxide: Carbon Dioxide Ratios	46
22	Comparison of Observed and Predicted Concentrations of Exhaust Constituents in ASCF Chamber	49
23	Effect of Choice Gaseous Equation of State on Computed Mole Fractions for Composition H	50
24	Influence of Exhaust Gas Mixing with Air on Carbon Monoxide/Carbon Dioxide Ratios. Composition D	51
A-1	Composition "D" Formulation	57
A-2	Composition "H" Formulation	58
A-3	Composition "L" Formulation	59
A-4	Propellant "Q" Formulation	60
B-1	Compositions "D and H" Concentrations	62
B-2	Composition "L" Concentrations	67
B-3	Composition "Q" Concentrations	68
C-1	Composition "D" Output	70
C-2	Composition "H" Output	85

LIST OF TABLES (Cont'd)

<u>Table</u>		<u>Page</u>
C-3	Composition "L" Output	100
C-4	Composition "Q" Output	112

Page intentionally left blank.

LIST OF FIGURES

<u>Figure</u>		<u>Page</u>
1	Time Course of Exhaust Products Post Firing. Composition D	18
2	Time Course of Exhaust Products Post Firing. Composition H	19

ACKNOWLEDGEMENT

We wish to thank the following individuals for their assistance with this project:

Ms. B. J. McBride, of the NASA-Lewis Research Center, for provision of the computer model used in the project; Dr. Eli Freedman, for assistance with interpretation of the results of the computer modeling; Mr. L. B. Thorne and his staff, of the U.S. Army Redstone Arsenal, for the construction and firing of the 2x2 rocket motors, the provision of samples of the various propellants, and the use of the Signature Characterization Facility and chamber; Dr. Steve Hoke, of the U.S. Army Biomedical Research and Development Laboratory, for the use of the on-line hydrogen chloride measurement system, and Major John Young, of the U.S. Army Biomedical Research and Development Laboratory, for his patience, support, and technical assistance in a number of the aspects of this project.

I. OBJECTIVES

The overall objective of the work described in this report is four-fold: to a) develop a standardized and experimentally validated approach to the sampling and chemical and physical characterization of the exhaust products of scaled-down rocket launch motors fired under experimentally controlled conditions at the Army's Signature Characterization Facility (ASCF) at Redstone Arsenal in Huntsville, Alabama; b) determine the composition of the exhaust products; c) assess the accuracy of a selected existing computer model for predicting the composition of major and minor chemical species; d) recommend alterations to both the sampling and analysis strategy and the computer model in order to achieve greater congruence between chemical measurements and computer prediction.

II. BACKGROUND

Upon initiation of the Army's Health Hazard Assessment Program in 1983, the lack of information on the potential health hazards from weapons combustion products, to include rockets and missiles, became evident. Research to elucidate significant health effects of rocket and missile combustion products has been limited. Experiences with weapons systems such as ROLAND, VIPER, HELLFIRE, STINGER, and MLRS have resulted in the development of specific medical issues by the U.S. Army. Presumably, these issues will be addressed, in order to enhance the effectiveness of soldiers using such weapons. Requisite to addressing these issues is defining the chemical and physical nature of the combustion products.

Evaluation of rocket exhaust toxicity from Army missile and rocket systems has been directed towards a limited number of combustion products. Chemical species such as carbon monoxide, carbon dioxide, nitrogen, oxides of nitrogen, hydrogen chloride, sulfur dioxide, ammonia, lead, and copper are among those frequently evaluated. A USAMRDC study¹ has demonstrated more than one hundred chemical species in the combustion products of selected propellants. Many of the species represent potential health hazards even though the majority of those identified were at low levels. During the study, data were obtained for the Multiple Launch Rocket System's (MLRS) propellant by computer prediction and laboratory analyses. The combustion product was generated by burning the propellant in a small test motor. When the exhaust plume was vented into a chamber with an inert atmosphere, good quantitative data was obtained for twelve chemical species, and was in excellent agreement with theoretically computed values. In excess of fifty trace gas species also were qualitatively identified.

Various investigators have examined propellant and related combustion products generated in a variety of ways to include directly from a weapon or other equipment system¹⁻⁵, burning in a calorimeter or bomb⁶⁻⁹, personal and general area sampling in indoor firing ranges^{10,11}, and detonation or combustion in chambers or microcombustors^{2,14-17}. The methods of sampling and characterization also have been varied. Sampling has been done under atmospheric^{1,2,4,5,12,16}, and less than atmospheric^{1-3,8,9,13-15} conditions which provide a basis for comparing the relation between variables, such as, pressure and available

oxygen, on the composition of the combustion product. Sampling methods have been either direct and continuous, e.g., the method used by Goshgarian^{13,14} where the exhaust products of solid propellants were introduced directly into a mass spectrometer for analysis immediately following combustion, or by collection in a container or on a medium for subsequent analysis. The latter has involved cryogenic trapping, evacuated glass or stainless steel cylinders, and sorbent cartridges, filters, and condensation trains. Analytical methods to detect organics, gases, metals, and particulates have included gas chromatography (GC), gas chromatography-mass spectroscopy (GC-MS), titration, optical and infrared spectroscopy, scanning electron microscopy (SEM), x-ray emission and diffraction, and particle size analysis. Because of limitations with each sampling and analytical technique, several techniques must be employed simultaneously to optimize qualitative and quantitative characterization.

Computer models have been used to predict propellant ballistic properties to include the identity of the major chemical species contained in the combustion products^{1,3,5,17-19}. When compared with laboratory derived empirical data, the models tend better to predict the major species than the minor ones both qualitatively and quantitatively^{1,5,19}. The models predict the chemical species that occur at the nozzle of the rocket as the exhaust exits; however, afterburning changes the chemical content of the combustion product. Afterburning and incomplete combustion effects are not predicted by the models.

The approach taken in this study was to carefully validate real time analytical methods in chamber studies at Oak Ridge National Laboratory (ORNL) for as many of the major constituents as practical. The instrumentation for real time monitoring would then be transported to the ASCF for the firing of the scaled-down test motors. Vapor and particle phase samples for determination of trace organics and metal species would be returned for analysis. The Army Signature Characterization Facility (ASCF) has been used to determine the concentrations of major toxic species in propellant exhaust, e.g., carbon monoxide, carbon dioxide, hydrogen chloride, lead, aluminum oxide, and other nuisance particles²⁰. The facility is a 19.6 m³ walk-in, climatic chamber with temperature limits of -40° to 140°F and humidity control in the range of 20 to 100% relative humidity (RH). Typical operating parameters are 70°F and 60% RH. Designed as a smoke measurement facility, the ASCF has been adapted for the measurement of rocket motor signature and exhaust constituents. The facility serves as a large gas cell in which the exhausts of standard 2 x 2 motors can be measured by infrared spectroscopy (Fourier Transform Infrared Spectroscopy, FTIS). Ports in the ASCF allow sampling and measurement by other methods, e.g., air sampling pumps and direct reading instruments.

The results of the characterization studies were then to be compared with values predicted using the most recent version of a computer model developed by the Lewis Research Center of the National Aeronautics and Space Administration (NASA-Lewis). The model was then to be refined to the extent of available resources, in order to improve the predictive capability of the system.

Results of these studies are described in two parts. In Part 1, results of the chemical and physical characterization studies are described and discussed. In Part 2, results of the

computer modeling work are described. Comparisons with characterization data are performed, and recommendations for model improvement are made.

PART 1: CHEMICAL CHARACTERIZATION STUDIES

EXPERIMENTAL

The sampling and analysis methods used in this study have been described in detail in a previous report²¹, and are summarized in Table 1. An assortment of real-time analytical instrumentation was employed. However, resources were not available for the use of on-line mass spectrometric measurement, as such would have required periodic transport to the ASCF. Essentially, the approach taken was to first validate candidate analytical methods in small chambers (0.4 and 1.4 m³) at ORNL. Analytical measurements using real time instrumentation were made of target species in the presence of well defined quantities of other species. The extent to which these materials altered the response to the target species was noted, and corrections made when appropriate. For species which could not be determined in real time (usually trace organic vapor phase and particle phase species), samples would be taken at the actual burns to be conducted at the ASCF, and returned to ORNL for detailed chemical analysis. Following method validation for the propellant composition of interest, the sampling and analysis instrumentation was transported to the ASCF at Redstone Arsenal, and deployed for monitoring and sampling. Typically, between 2 and 3 firings of a test motor could be conducted during each 8-hour shift. Burns of the various propellant formulations took place between August, 1987 and December, 1989.

RESULTS AND DISCUSSION

The compositions of the various propellant formulations tested in this project are listed in Appendix A. Briefly, Composition D was a double-base propellant, comprised of approximately 50% nitrocellulose and about 40% nitroglycerine. Composition H was also a double base system, with approximately 8% by weight of potassium perchlorate added. Composition L was a formulation comprised of nearly 75% ammonium perchlorate, with the remainder being polyvinylchloride plastic and di (2-ethylhexyl) adipate. Composition Q was a minimum signature propellant, comprised of 66% HMX, and about 11% each of nitroglycerine and butane triol trinitrate. (A fifth motor, referred to as Composition X was fired only one time, and no modeling studies were applied to it.) (Note that the linkage between the propellant and the weapon systems for which they may be used is considered CLASSIFIED information. Those having need of this information should contact the COR listed on the title page of this document.) All of the propellants contained small amounts of metals. The motor size tested varied between ca. 24 - 75 g. This compares to a typical launch motor weight on an anti-tank weapon system of ca. 560 g.

Sampling of the exhausts was not without its difficulties. For example, for the first run of Composition D, the high volume particulate collector was placed inside the ASCF

chamber. However, the shock wave from the firing was sufficient to blow the filter media out of the holder. Thus, for subsequent runs, the sampler was placed outside the chamber and

TABLE 1
Summary of Sampling and Analysis Strategy
for Rocket Exhaust Constituents at ASCF

<u>Component</u>	<u>Sampling and Analysis Method</u>
Carbon Monoxide	Real Time, non-dispersive infrared analyzer
Carbon Dioxide	Real time, non-dispersive infrared analyzer
Oxides of Nitrogen	Real time, chemiluminescence analyzer
Hydrogen Cyanide	Real time, electrochemical analyzer
Ammonia	Real time, electrochemical analyzer
Hydrogen Chloride	Real time, ion selective electrode
Total Suspended Particulate Matter photometer	Real Time: forward scattering infrared Off line: two-stage high volume filter, gravimetric analysis
Metals	Low volume collection on membrane filter, followed by inductively coupled plasma or atomic absorption analysis.
Particle Size Distribution	Cascade impaction, optical comparison of stages
Trace Vapor Phase Organics	Collection on multi-sorbent traps, followed by thermal desorption gas chromatography/mass spectrometric analysis.
Trace Particle Phase Organics	Collection on two-stage, high volume filter, analysis by high performance liquid chromatography and/or gas chromatography/mass spectrometry.

connected to it with the flexible plastic pipe. Also, on a latter run with "D," the force of the shock wave buckled the main chamber access door on the ASCF. For the final firing of "D," the nozzle was changed to force the propellant to burn over a longer period of time. This resulted in a considerable alteration in the exhaust composition (see Table 2).

Major Constituents

The observed exhaust major constituent concentrations in the ASCF are reported in Tables 2 - 5, along with various physical characteristics of the motors. The data is summarized in Table 6.

It is important to note that for those constituents determined in real time (ie, the gases), the concentrations listed represent peak concentrations. For gases, maxima were typically achieved within 30 seconds of the firing of the rocket motors. Presumably, maxima were achieved as the chamber contents were mixed by the fan mounted inside the chamber. Such was not always the case for the particulate phase species. For example, in Figures 1 and 2 are compared the time courses for some of the major exhaust products for firings of Composition D and H motors, from about 30 seconds following the firing onward. For Composition D, immediately after following the achievement of maximum concentrations, the constituent levels slowly decreased. While the same happened for Composition H vapor phase species, the particles were very slow to reach a maximum. Although particle

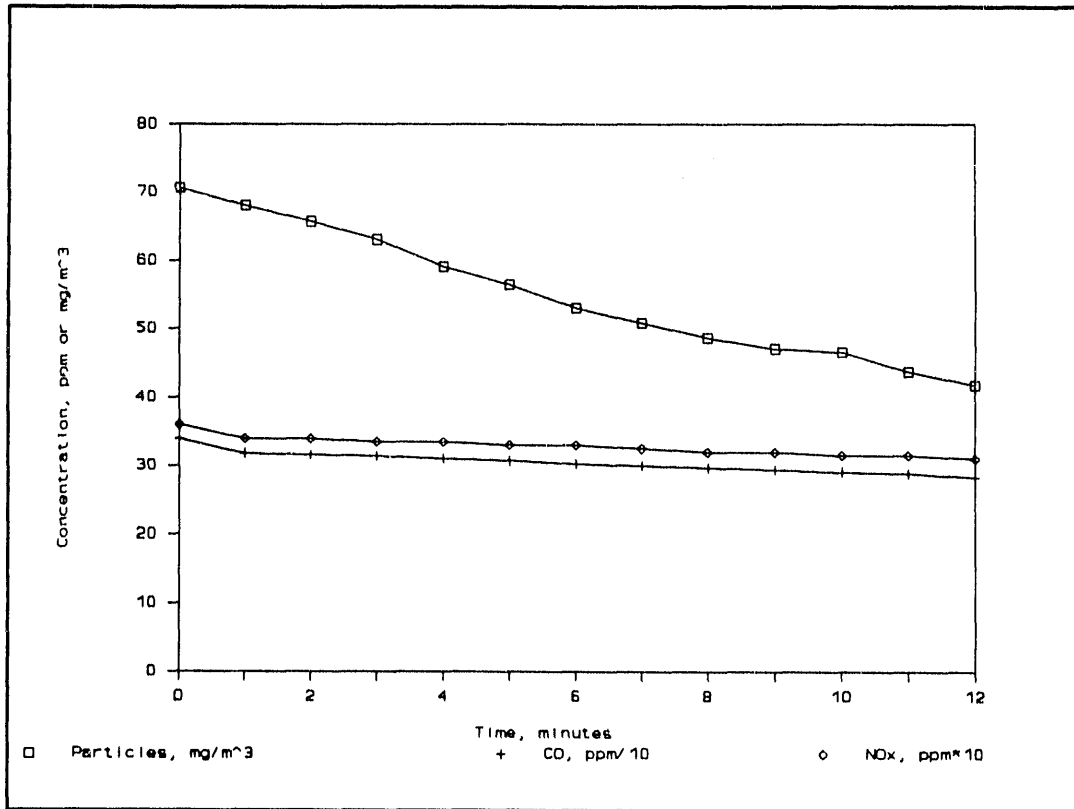


Figure 1. Time course of exhaust products post firing. Composition D.

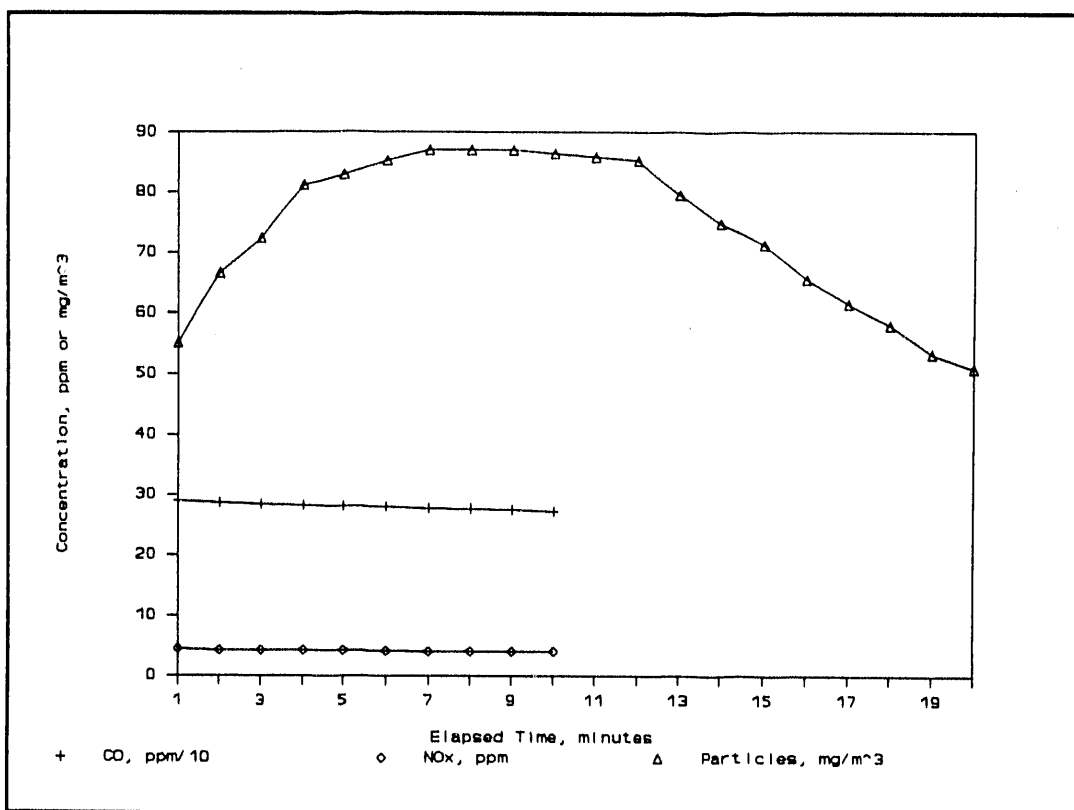


Figure 2. Time course of exhaust products post firing. Composition H.

size differences between the two products were minimal (see below), it was speculated that the action of the fans could have stirred up larger agglomerates which settled immediately after firing, which eventually broke up to form smaller primary particles. Concentration reductions seemed most likely due to leaking of the chamber contents through door seals, bulkheads, etc. Particle concentrations decreased somewhat more rapidly than those of vapor phase constituents, probably due to settling.

No attempt was made to determine the concentrations of methane, hydrogen gas, or water vapor. For the former two species, quantitative measurements would be very difficult without the use of an on-line mass spectrometer, and such was not available for this work. Water vapor is one of the major components of the motor exhaust. The mole fraction predicted by the NASA-Lewis computer program typically is in the range of 20% (see below). However, the difficulty of making accurate determinations of water vapor concentration in a large chamber is considerable. For example, the maximum amount of hydrogen in any of the formulations listed in Tables A-1 - A-4 is sufficient to produce only 15 g of H₂O in the 20 m³ ASCF chamber. This is comparable to increasing the concentration by at most 0.75 g/m³, to a concentration of ca. 11 g/m³ at 60% relative humidity at 21° C. The addition of this amount of water vapor would increase the RH by 4%, as long as no change in the temperature occurred. Given that such small changes would be difficult to measure accurately, and that water vapor represents no health hazard,

TABLE 2
SUMMARY OF CHARACTERIZATION DATA
COMPOSITION D
MAJOR CONSTITUENTS

RUN NUMBER	1	2	3	4	5	6 ^d
DATE	8-25-87	8-25-87	8-26-87	8-26-87	6-23-88	6-23-88
QUANTITY OF PROPELLANT, g	75	71	75	75	67	NR
EXIT DIAMETER, inches ^a	1.0	1.0	1.0	1.0	1.0	1.0
THROAT DIAMETER, inches	0.55	0.707	0.50	0.50	0.50	NR
ASCF CHAMBER TEMPERATURE, °F	71	78	71	71	68	71
ASCF RELATIVE HUMIDITY, %	76	60	60	60	69	87
INTERNAL PRESSURE OF MOTOR, psia	2200	2500	3000	2500	2500	2500
CARBON MONOXIDE ^b , ppm	292	367	340	325	282	139
CARBON DIOXIDE ^{b,c} , ppm	2200	2500	3000	2500	1245	1505
NITRIC OXIDE ^b , ppm	4.2	3.0	3.6	3.5	2.2	43.0
NITROGEN DIOXIDE ^b , ppm	ND	ND	ND	ND	ND	ND
HYDROGEN CYANIDE ^b , ppm	ND	ND	ND	ND	ND	ND
AMMONIA, ppm	ND	0.2	ND	ND	ND	ND
TOTAL SUSPENDED PARTICULATE MATTER, mg/m ³	71	63	71	70	67	NR
LEAD mg/m ³	18	35	73	40	36.9	41.8
COPPER mg/m ³	2.0	3.8	9.1	4.4	4.0	4.8
ALUMINUM (as Al ₂ O ₃) mg/m ³	ND	ND	ND	ND	ND	ND
CHROMIUM mg/m ³	ND	ND	ND	ND	ND	ND
ZIRCONIUM OXIDE mg/m ³	ND	ND	ND	ND	ND	ND

^a Nominal exit diameter was 1.0 inches. However, this was an estimate only. Actual diameters could have varied between 0.75 and 1.25 inches.

^b Maximum observed concentrations.

^c Determined in Runs 1-4 using Dreager Tubes, Runs 5 and 6 using NDIR analyzer.

^d Special nozzle used which increased burn time. See text. Data may not be representative.

NR: Not Recorded

ND: Not Detected

TABLE 3
SUMMARY OF CHARACTERIZATION DATA
COMPOSITION H
MAJOR CONSTITUENTS

RUN NUMBER	1	2	3	4
DATE	6-22-88	6-22-88	6-22-88	6-23-88
QUANTITY OF PROPELLANT, g	25	25	24	24
EXIT DIAMETER, inches ^a	1	1	1	1
THROAT DIAMETER, inches	0.261	0.261	0.261	0.261
ASCF CHAMBER TEMPERATURE, °F	70	70	70	72
ASCF RELATIVE HUMIDITY, %	NR	68	57	63
INTERNAL PRESSURE OF MOTOR, psia	5000	5000	5000	5000
CARBON MONOXIDE ^b , ppm	290	c	300	298
CARBON DIOXIDE ^b , ppm	250	c	270	290
NITRIC OXIDE ^b , ppm	4.5	c	1.7	5.0
NITROGEN DIOXIDE ^b , ppm	ND	c	ND	ND
HYDROGEN CYANIDE ^b , ppm	ND	c	ND	ND
HYDROGEN CHLORIDE, ppm	<1		<1	1
AMMONIA ^b , ppm	ND	c	ND	ND
TOTAL SUSPENDED PARTICULATE MATTER, mg/m ³	87	c	73	176
LEAD mg/m ³	0.771	c	0.618	0.486
COPPER mg/m ²	0.726	c	0.897	0.508
ALUMINUM (as AL ₂ O ₃) mg/m ³	ND	c	ND	ND
CHROMIUM mg/m ³	ND	c	ND	ND
ZIRCONIUM OXIDE mg/m ³	ND	c	ND	ND
MOLYBDENUM, mg/m ³	1.41	c	0.309	0.088
MAGNESIUM, mg/m ³	0.261	c	0.224	0.250
TIN, mg/m ³	0.348	c	0.397	0.177

- ^a Nominal exit diameter was 1.0 inches. However, this was an estimate only. Actual diameters could have varied between 0.75 and 1.25 inches.
- ^b Maximum observed concentrations.
- ^c Sample Acquisition failure.
- NR: Not Recorded
- ND: Not Detected

Table 4
SUMMARY OF CHARACTERIZATION DATA
COMPOSITION I
MAJOR CONSTITUENTS

RUN NUMBER	1	2	3	4
Date	1-18-89	1-18-89	1-19-89	1-19-89
Quantity of Propellant, g	24	24	24	24
Exit Diameter, inches ^a	1.0	1.0	1.0	1.0
Throat Diameter, inches	0.28	0.28	0.28	0.28
ASCF Chamber Temperature, °F	69	70	71	70
ASCF Relative Humidity, %	NR	68	49	48
Internal Pressure of Motor, psia	2500	2500	2500	2500
Carbon Monoxide ^b , ppm	298	337	371	371
Carbon Dioxide ^b , ppm	164	137	164	150
Nitric Oxide ^b , ppm	1.5	0.5	0.5	0.5
Nitrogen Dioxide ^b , ppm	ND	ND	ND	ND
Hydrogen Cyanide ^b , ppm	ND	ND	ND	ND
Ammonia ^b , ppm	ND	ND	ND	ND
Hydrogen Chloride, ppm	112	112	108	122
Total Suspended Particulate Matter, mg/m ³	50	33	38	51
Lead mg/m ³	2.73	2.71	1.52	1.50
Copper mg/m ³	5.74	4.43	3.98	3.80
Aluminum (as AL ₂ O ₃) mg/m ³	4.33	3.62	3.35	3.14
Chromium mg/m ³	0.64	0.52	0.52	0.46
Zirconium Oxide mg/m ³	ND	ND	ND	ND
Cadmium, mg/m ³	0.15	0.13	0.12	0.11

^a Nominal exit diameter was 1.0 inches. However, this was an estimate only. Actual diameters could have varied between 0.75 and 1.25 inches.
^b Maximum observed concentrations.
 NR: Not Recorded
 ND: Not Detected

Table 5

SUMMARY OF CHARACTERIZATION DATA
COMPOSITION Q
MAJOR CONSTITUENTS

RUN NUMBER	1	2	3
Date	12-1-89	12-5-89	12-5-89
Quantity of Propellant, g	65	64	60
Exit Diameter, inches ^a	1.125	1.125	1.125
Throat Diameter, inches	0.188	0.190	0.197
ASCF Chamber Temperature, °F	66	63	64
ASCF Relative Humidity, %	34	46	40
Internal Pressure of Motor, psia	1580	1480	1100
Carbon Monoxide ^b , ppm	84	84	93
Carbon Dioxide ^b , ppm	1350	1324	1194
Nitric Oxide ^b , ppm	2	1	1
Nitrogen Dioxide ^b , ppm	ND	ND	ND
Hydrogen Cyanide ^b , ppm	ND	ND	ND
Ammonia ^b , ppm	ND	ND	ND
Total Suspended Particulate Matter, mg/m ³	31	28	29
Lead mg/m ³	18.6	1.5	14.1
Copper mg/m ³	0.002	0.00	0.01
Aluminum (as Al ₂ O ₃) mg/m ³	ND	ND	ND
Chromium mg/m ³	0.0	0.02	0.02
Zirconium Oxide mg/m ³	<0.1	<0.1	0.06
Iron, mg/m ³	0.33	0.06	0.06

^a Nominal exit diameter was 1.0 inches. However, this was an estimate only. Actual diameters could have varied between 0.75 and 1.25 inches.

^b Maximum observed concentrations.

NR: Not Recorded

ND: Not Detected

TABLE 6					
MEAN CONCENTRATIONS ACHIEVED IN ASCF CHAMBER					
Constituent	Propellant Formulations (approximate motor size)				
	D (75 g)	H (25 g)	L (22 g)	Q (63 g)	X (25 g)
CO, ppm	330	295	344	85	195
CO ₂ , ppm	1375	270	154	1250	561
NH ₃ , ppm	BMDL	BMDL	BMDL	BMDL	BMDL
NO, ppm	3.5	4	0.75	1.3	5.0
NO ₂ , ppm	BMDL	BMDL	BMDL	BMDL	BMDL
HCN, ppm	BMDL	BMDL	BMDL	BMDL	BMDL
HCl, ppm	BMDL	<1	114	BMDL	BMDL
Particles, mg/m ³	70	100	43	30	45
Pb, mg/m ³	40	0.6	2	16	0.18
Cu, mg/m ³	4	0.7	4	0.01	0.45
Al ₂ O ₃ , mg/m ³	BMDL	BMDL	3.5	BMDL	BMDL
Cr, mg/m ³	BMDL	BMDL	0.5	0.01	1.3
Cd, mg/m ³	BMDL	BMDL	0.13	BMDL	BMDL
Sn, mg/m ³	BMDL	0.3	BMDL	BMDL	BMDL

* BMDL: Below method detection limit.

it was decided that determination of water vapor would be omitted from the measurements.

A determination of the carbon balance for the chamber indicates that the analytical measurements account for approximately 60% of the carbon in the formulation. For example, using the data in Table A-1 for Composition D, there are ca. 2.06 moles of carbon in the motor. Data from Run 5 of the "D" test indicates ca. 1.2 moles of C tied up as the oxides of carbon (CO and CO₂). The analysis of the vapor and particle phase organic constituents (see below) indicates that only a very tiny amount of C is tied up in the trace species. And even if all the non-metal material collected as particulates was pure carbon, such would only add ca. 26 mg/m³ of carbon, or about 0.043 moles. Thus, it would appear that a significant fraction of the carbon present in the motor itself (ca. 33%) is present in some form which is not amenable to conventional analyses. Without confirmatory data, the composition of such material would be highly speculative.

All of the formulations, despite the relatively small quantities of propellant fired in the chamber (ca. 1/7 to 1/20 of a typical size launch motor) produced substantial concentrations of carbon monoxide, ranging from a low of about 300 ppm/100 g of propellant for Composition Q, to a high of nearly 1400 ppm/100 g for Composition L. The amounts of carbon dioxide produced varied considerably, from more than a factor of 10 greater than the CO produced, to only about half the amount of CO produced. Only very small quantities of nitric oxide were produced, and no measurable amounts of nitrogen dioxide were produced. The latter is not surprising, since the production of NO₂ is dependent on the square of the NO concentration²². If the concentration of NO is low, significant amounts of the dioxide will not be produced in the first 10 minutes following the firing of the motor (the duration of time for which the ASCF was sampled for the oxides of nitrogen). Essentially, no ammonia or hydrogen cyanide was found at levels greater than 1 ppm. In the two formulations which contained perchlorates, measurable levels of hydrogen chloride were found. However, the observed levels were not proportionate to amount of perchlorate present. For example, while Composition L had about 8x more perchlorate in the formulation than Composition H, the levels observed in the chamber were about 100x larger. There were a number of metals found in the airborne particles resulting from motor firings. Copper, aluminum (as the oxide), lead, tin, chromium, and cadmium were all found in measureable amounts. Probably the lead and cadmium are of the greatest concern from a health risk standpoint. For both Compositions D and Q, lead was found to be present in the diluted exhaust at levels greater than 10 mg/m³.

In Table 7 are listed the particle size distributions of the exhaust products for the formulations studied. The mass median aerodynamic diameters (MMAD) were all less than 2 μm, indicating that the particles remaining airborne long enough to be collected by the sampling method were capable of being inhaled. Although Composition D had a measurably bimodal distribution, the higher of the two MMADs was still less than 5 μm. Particles from Composition L had a somewhat smaller MMAD than of the other formulations, but the breadth of the distribution was larger.

TABLE 7

Particle Size Distribution
Rocket Exhaust Particulate Matter
Mean Values

Mass Median Aerodynamic Diameter (MMAD) and Geometric Standard Deviation (σ_g)

<u>Composition</u>	<u>MMAD (μm)</u>	<u>σ_g</u>
D ^a	1.46	1.86
H	1.44	1.77
L	0.807	2.14
Q	0.96	2.4

^a Composition D had a definite bimodal distribution:
large particles had a MMAD of 3.6 microns, with $\sigma_g = 1.8$;
small particles had a MMAD of 0.47 microns, with $\sigma_g = 1.7$.

Trace Constituents

Trace organic vapor phase constituents present in the exhaust atmospheres were determined by collection of samples on multi-sorbent traps, followed by analysis by thermal desorption GC/MS. Because of the sensitivity of the method, collection of sufficient sample was not difficult. However, the background levels of vapors in the chamber were very high, and as a result, made it very difficult to discern quantities of vapors arising from the firing of the rocket motor. Despite the fact that the chamber was flushed with clean air between most firings, background levels of collected constituents on chamber blanks were substantial (see Table 8). This suggests that there may be significant off-gassing of volatiles from materials adsorbed on the surfaces inside the chamber. Accurate quantitative determination of the constituents identified was exceedingly difficult, because it required determining the difference between two large values. Also, the largest peak

in many of the samples was determined to be a mixture of hydrocarbons that were not resolved, even by high-resolution chromatography. These may be unburned, volatilized waxes used in the manufacture of the test motors. In Appendix B, in Tables B-1 through B-4, are listed the various trace organic vapor phase components identified and quantified in the exhaust. The data is summarized in Tables 9 - 12. In this case, mean quantities were reported only if the compound was observed in two or more of the traps analyzed from the firing of a specific composition and if the compound was present at a level 50% greater than the highest level reported for any blank collected during the series of firings. Several comments are in order. First, as stated above, it was very difficult to obtain a truly "clean" chamber atmosphere into which to fire the motors.

Table 8

CONCENTRATION OF SELECTED CONSTITUENTS IN CHAMBER BLANKS

$\mu\text{g}/\text{m}^3$	Concentration	Concentration	$\mu\text{g}/\text{m}^3$
		C ₃ -cyclopentane	52.4
Methylene chloride	119	C ₁₂ -cyclohexasiloxane	8.2
Methyl crotonate	2.1	C ₁₂ -cyclohexasiloxane	4.4
C ₆ -cyclotrisiloxane	239	C ₃ -cyclopentane	7.4
C ₈ -cyclotetrasiloxane	7.5	Diethylphthalate	19.1
C ₃ -cyclopentane	254	Pentadecane	2.1
Terpinene	8.8	Nonadecane	2.6
C ₁₀ -cyclopentasiloxane	129	Trimethylcyclobutanone	3.5
Naphthalene	8.8		

Originally, it was believed that the siloxane compounds may have resulted from contamination of the multi-sorbent traps with a soap bubble solution which was used in measuring the sample flow rates in some of the earlier studies. (This potential for contamination has been confirmed by subsequent experiments in the laboratory). However, the siloxanes were also present in the blanks which were acquired in later experiments, in which only instrumental calibration of the flow rates were made. Thus, the siloxanes may be off-gassed byproducts of the detergents used to clean the chamber prior to the motor firings, or they may be true products of the propellant combustion. Significant amounts of siloxane have been seen in the vapor phases of several of the exhausts from various motors. In general, there appeared to be a greater variety of trace organics present in the vapor phase of the composition D and H exhausts. The fact that Composition L is predominantly inorganic probably contributes to this observation.

Table 13 summarizes the maximum observed concentrations of non-siloxane compounds found in the ASCF atmospheres for those constituents with levels greater than 10 $\mu\text{g}/\text{m}^3$ (ca. 3 ppbv for benzene). For example, the average concentration for benzene was 17.6

$\mu\text{g}/\text{m}^3$ or 5.4 ppb. Overall, the concentrations of these species were several orders of magnitude below the levels at which they are regulated for workplace exposures. One may conclude table 9

TABLE 9
ESTIMATED CONCENTRATION OF TRACE VAPOR PHASE CONSTITUENTS
COMPOSITION D

<u>CONSTITUENT</u>	<u>APPROXIMATE CONCENTRATION^a, $\mu\text{g}/\text{m}^3$</u>
Trichloroethane	0.4
Benzene	13.5
Trichloroethylene	2.0
Methyl crotonate	15.3
Toluene	10.5
C ₆ -cyclotrisiloxane	11
C ₂ -benzene	5.7
Phenylacetylene	2.7
Styrene	4.7
C ₃ -benzene	2.7
C ₃ -benzene	3.9
Decane	1.5
Decane	0.9
Terpinene	0.7
C ₆ -cyclotetrasiloxane	15
Teripene	1.1
Undecane	0.8
Naphthalene	6.1
C ₃ -cyclopentane	1.3
Dodecane	0.7
C ₁₂ -cyclohexasiloxane	17.8
Hexadecane	1.1

^a Estimated by determination of mean value for at least 2 of traps analyzed, which must be at least 50% greater than the highest blank level observed. Levels have been corrected for blanks.

TABLE 10
ESTIMATED CONCENTRATION OF TRACE VAPOR PHASE CONSTITUENTS
COMPOSITION H

<u>CONSTITUENT</u>	<u>APPROXIMATE MEAN CONCENTRATION^a, $\mu\text{g}/\text{m}^3$</u>
Trichlorofluoromethane	9.8
Trichloroethane	0.4
Benzene	17.6
Methylcrotonate	7.0
Toluene	2.2
Phenylacetylene	2.4
C ₂ -benzene	0.7
Heptene	8.4
Cyanobenzene	18.0
C ₃ -benzene	1.4
C ₃ -cyclopentane	16.1
C ₁₄ -cycloheptasiloxane	2.2

^a Estimated by determination of mean value for at least 2 of traps analyzed, which must be at least 50% greater than the highest blank level observed. Levels have been corrected for blanks.

TABLE 11
ESTIMATED CONCENTRATION OF TRACE VAPOR PHASE CONSTITUENTS
COMPOSITION L

<u>CONSTITUENT</u>	<u>APPROXIMATE MEAN CONCENTRATION^a, $\mu\text{g}/\text{m}^3$</u>
Octamethyl-cyclotetrasiloxane	3.5
Octamethyl-cyclotetrasiloxane	2.6

^a Estimated by determination of mean value for at least 2 of traps analyzed, which must be at least 50% greater than the highest blank level observed. Levels have been corrected for blanks.

TABLE 12
ESTIMATED CONCENTRATION OF TRACE VAPOR PHASE CONSTITUENTS
COMPOSITION Q

<u>CONSTITUENT</u>	<u>APPROXIMATE MEAN CONCENTRATION^a, $\mu\text{g}/\text{m}^3$</u>
trichlorofluoromethane	0.6
hexamethyl cyclotrisiloxane	0.2
trimethyl-cyclobutanane	23.5
octamethyl-cyclotetrasiloxane	0.3
phthalate	8.5

^a Estimated by determination of mean value for at least 2 of traps analyzed, which must be at least 50% greater than the highest blank level observed. Levels have been corrected for blanks.

TABLE 13
NON-SILOXANE VAPOR PHASE COMPOUNDS PRESENT IN
MOTOR EXHAUSTS AT CONCENTRATIONS GREATER THAN 10 $\mu\text{g}/\text{m}^3$ in ASCF
CHAMBER

<u>Component</u> <u>Concentration, $\mu\text{g}/\text{m}^3$</u>	<u>Composition^a</u>	<u>M a x i m u m</u>
Benzene	D,H	17.6
Methylcrotonate	H	15.3
Toluene	H	10.5
Cyanobenzene	H	18.0
C ₃ -cyclopentane	H	16.1
tri methyl-cyclobutanone	Q	23.5

^a Composition only listed if present at $> 10\mu\text{g}/\text{m}^3$ in that particular exhaust atmosphere.

from this that the levels of trace organic vapor phase constituents are probably not of concern from a health risk standpoint under most conceivable use scenarios. Only by repeated firings from an enclosed space could these materials reach toxic levels. And before toxic levels of the organic vapor phase species was reached, CO levels would probably be lethal.

Determination of the higher molecular weight particulate-phase constituents proved difficult for the samples from the initial runs of Composition D (the first propellant studied). Because of filter clogging immediately following the firing of the test motors, the number of particles collected was very small. For example, the largest amount of sample collected on any of the initial runs was 40 mg. This was dispersed over a 4"-diameter Teflon-coated glass fiber filter. Initial GC analysis of the extracts indicated very low levels of hydrocarbons. Next, the extracts were subjected to GC/MS analysis with selected ion monitoring (SIM). SIM has the advantage of identifying species from selected characteristic ions, as opposed to using the entire ionic fragmentation pattern. Due to the small amounts of material collected on the filters, quantities detected in the particulate filter extracts were considerably below our normal detection limits for the target constituents. For that reason, in the preceding studies, the particulate collection system was modified to be a two-stage filter. This approach proved to be much more successful at collecting greater amounts of particles. In Table 14 are listed the polynuclear aromatic hydrocarbons (PAH's) determined in the exhaust particles collected from the firings of Compositions D, H, L, and Q. In addition, a comparison is also made between these levels and those determined for outside air at a military base. A few comments are in order. First, only data for particles collected in the coarse filters are reported. The fine filters collected very few particles (1 - 5 mg), and thus many of the levels determined are

at or near the instrumental limits of detection. Nitro-PAHs were determined only for Composition D and H exhausts. The levels

Table 14

Concentrations ($\mu\text{g/g}$) of Nitro-PAH and PAH in Particulate Matter Collected on Coarse Filters at ASCF:
Comparison with Outdoor Air Particulate Collected at U.S. Army Installation

Constituent	Propellant Exhaust												F. Carson ^a Outside Air Particulates
	Composition D		Composition H			Composition L		Composition Q					
	Run 5	Run 6	Run 1	Run 3	Run 4	Run 1	Run 2	Run 1	Run 2	Run 1	Run 2		
2-nitrofluorene	BMDL	BMDL	0.039	0.061	0.032	ND	ND	ND	ND	ND	ND	ND	BMDL
9-nitroanthracene	0.14	BMDL	BMDL	BMDL	BMDL	ND	ND	ND	ND	ND	ND	ND	BMDL
1-nitropyrene	BMDL	BMDL	BMDL	BMDL	BMDL	ND	ND	ND	ND	ND	ND	ND	BMDL
benz(e)anthracene	0.22	0.19	0.19	0.15	0.15	0.22	0.19	0.19	0.19	0.19	0.81	0.81	4.9
chrysene	0.26	0.83	0.55	0.61	0.40	0.05	0.05	0.05	0.05	0.05	2.28	2.28	11.5
benzo(b + j + k)fluoranthrene	0.47	1.7	1.1	1.4	1.1	0.04	0.04	0.13	0.13	0.13	0.75	0.75	15.7
benzo(e)pyrene	0.26	0.66	0.62	0.92	0.86	1.18	0.44	0.44	0.44	0.44	0.54	0.54	9.4
benzo(a)pyrene	0.39	0.31	0.59	0.52	0.37	0.05	0.05	0.05	0.05	0.05	0.41	0.41	8.0
3-methylcholanthrene	BMDL	BMDL	BMDL	BMDL	BMDL	BMDL	BMDL	BMDL	BMDL	BMDL	BMDL	BMDL	BMDL
dibenz(a,i)anthracene	0.13	1.9	0.51	0.52	0.15	0.24	0.14	0.14	0.14	0.14	1.06	1.06	3.7
indeno[1,2,3-cd]pyrene	0.47	0.83	1.4	0.69	0.69	1.74	0.64	0.64	0.64	0.64	1.06	1.06	17
dibenz(a,h)anthracene	0.13	BMDL	0.23	0.16	0.14	0.13	0.31	0.31	0.31	0.31	1.63	1.63	3.0
benzo(g,h,i)perylene	2.0	BMDL	3.2	3.2	BMDL	5.17	1.39	1.39	1.39	1.39	1.87	1.87	21.8

ND: Not detected BMDL: Below method detection limit

^a Data from Griest, et al., 1988

determined in these earlier studies were so low that a repeat of the complex analyses did not seem warranted. Despite the very low levels of PAH found in the particulates, the results are fairly consistent from sample to sample. The concentrations of a few selected PAHs in the particles of the Q exhaust were somewhat higher, but not by more than an order of magnitude. The only nitro-PAH which was identified consistently in the exhausts of the motors was 2-nitrofluorene, in the exhaust of Composition H. Its concentration ranged from ca. 30 - 60 ng/g. Most of the other PAHs identified and quantified in the exhausts were present at levels less than 1 $\mu\text{g/g}$. The outdoor air particulate sample with which a comparison is made was acquired outside a large motor pool building at Fort Carson, Colorado, in the mid-1980's as background data for another project supported by the USABRD²³. A major contributor to the particulates in this sample was expected to be diesel- and gasoline-powered motor vehicle exhaust. The comparison indicates that, with the exception of 2-nitrofluorene, the PAH content of the rocket exhaust particulate is substantially less than (usually by a factor of 10 or so) that of outdoor air particulate matter found in a semi-urban setting at a military base. Also, the BaP content of the exhaust particulates is about half that of cigarette smoke particulate matter²⁴. Because of the relatively low concentrations of the PAH in the particle phase, the airborne concentrations of the PAHs are very low. For example, at the maximum particle concentration of 70 mg/m^3 in the ASCF chamber (as a surrogate for human exposure conditions), the highest observed airborne benzo(a)pyrene concentrations would be approximately 0.09 $\mu\text{g/m}^3$, and that of benzo(g,h,i)perylene would be 0.36 $\mu\text{g/m}^3$. At these levels, the airborne PAHs and nitro-PAHs in the rocket exhaust probably do not represent an additional health hazard above that of normal urban air particulates for the troops using such weapon systems.

SUMMARY AND RECOMMENDATIONS - PART 1

The exhaust products from the firing of 2x2 rocket motors in a 20 m^3 test chamber have been characterized. The data indicated that of all of the toxic and/or carcinogenic species present, most were present at very low levels. Of the major toxic constituents, carbon monoxide was the most universally present. Interestingly, the formulation with the greatest fraction of inorganic material (Composition L) yielded the highest concentration of CO in the ASCF chamber per 100 g of propellant. Nitric oxide was present in all of the exhausts, but typically at levels less than 5 ppm in the 20 m^3 chamber. No ammonia or hydrogen cyanide was observed at levels greater than 1 ppm. Levels of HCl were observed in the Composition L exhaust which were very high (> 100 ppm), and it seems likely that firing of this propellant in an enclosed space would produce very high concentrations of this toxic species. However, no data was obtained as to whether the HCl was present in the particle or the vapor phase.

Particles were present at substantial levels in all of the exhaust atmospheres ($\geq 30 \text{ mg/m}^3$). Particle size distributions indicated that for those particles which could be collected under the sampling conditions employed, virtually all of the material was within an inhalable size range (< 10 μm mass median diameter). A large fraction of the airborne particles were comprised of metallic species. Copper and lead (especially the latter) were present in the ASCF atmospheres of many of the motor types at levels above those regulated by OSHA.

However, the levels of FAHs and nitro-PAHs in the particulates were very low. Comparison with airborne particulate matter collected at a military installation indicated that the PAH content of the particles was about 1/10 that of outdoor air particles.

Quantitative determination of the organic vapor phase constituents was very difficult due to both the very low levels at which they were present and the presence of large amounts of other species in the background samples. The latter included a large number of cyclosiloxanes, probably from the off-gassing of the chamber walls following cleaning. Only a few exhaust components were found at levels greater than a few ppb. These included benzene, toluene, methylcrotonate, and cyanobenzene. These were typically present at levels less than 10 ppb in the chamber.

From the standpoint of follow-on studies, recommendations depend on the goal of such efforts. If the goal is to refine the comparison between the observed chemistry and the predicted compositions, then the determination of methane (CH_4) and molecular hydrogen (H_2) would be very desirable. Such is a very difficult task, and would likely require a dedicated real time mass spectrometer to make such measurements. However, the determination of such constituents would not significantly further the understanding of potential health risks of the exhaust products, since neither are toxic species.

Since these experimental studies were performed, there have been two developments in the field of analytical chemistry which, if applied to these studies, could significantly improve the quality of the data generated, especially with regard to the determination of volatile organics. First, a number of carbon based adsorbents are now commercially available which have many fewer artifacts than the Tenax used in these studies. Were the sorbent traps used in these studies replaced with the new systems, it is likely that the number of artifacts present in the samples would be significantly reduced, minimizing the complexity of the interpretation of the data. Also, the recent development of direct sampling ion trap mass spectrometry (DSITMS) for the determination of airborne vapor phase constituents is significant. DSITMS could be used to provide determination of a number of volatile species of toxicologic interest in real time, much like an NDIR analyzer provides real time measurement of CO or CO_2 . Transportable DSITMS systems are now under development at ORNL for air toxics monitoring at environmental remediation sites, and such technology could be useful for other scenarios.

Finally, the most important recommendation for future work is the determination of the exhaust product composition under actual field conditions, firing full scale motors. There are two important reasons for this. First, the data in this study indicates that changes in the physical properties such as burn time can have a radical effect on exhaust composition. This suggests that it will be difficult to obtain highly realistic data unless true field measurements can be made. Secondly, firing of the test motors in an enclosed chamber causes significant run-to-run background contamination problems. Perhaps the firing of motors in single use, disposable structures, such as large nylon tents, would eliminate much of the contamination problem.

PART 2 - MODELING FOR HEALTH HAZARD PREDICTION

INTRODUCTION

Over the past 30 years, several digital computer programs have been developed at the National Aeronautics and Space Administration's Lewis Research Center to carry out the considerable numerical calculations involved in the determination of the equilibrium composition of complex chemical mixtures at high temperatures^{25, 26,27}. Updates to these programs have incorporated improved computational methods and adaptations to improvements in computer speeds and capacities. In accordance with a suggestion from project management, we have used the 1986 version²⁸ of the program described in Reference 27 to obtain estimates of the composition of the exhaust gases from four different solid propellants. This was referred to as the NASA-Lewis model, version CET-86. The program obtains estimates of the equilibrium composition of a mixture of several components by minimizing either the Gibbs function or the Helmholtz function. If temperature and volume are constant, the Helmholtz function of a system decreases during an irreversible process, becoming a minimum at equilibrium; if temperature and pressure are constant, the same is true of the Gibbs function²⁸. All gases are assumed to be ideal, even if small amounts of condensed species are present. Calculations can be done for any one of six combinations of assigned state parameters (e.g., temperature, pressure, density, entropy, and enthalpy); additionally, theoretical rocket performance data can be obtained. The assumptions involved in the calculation of rocket performance parameters are listed in Ref. 3. Briefly, they are: (1) validity of the one-dimensional form of the continuity, energy, and momentum equations; (2) zero velocity (no gas movement) in the combustion chamber; (3) complete combustion (in the sense that all reactants are converted to products); (4) adiabatic combustion; (5) isentropic (adiabatic and reversible) expansion; (6) homogeneous mixing; (7) ideal gas law; and (8) zero temperature and pressure lags between condensed and gaseous species. An extensive discussion of these assumptions and their validity can be found in Reference 30.

The program first determines combustion properties in the rocket motor chamber and then determines exhaust composition and properties at various stations in the nozzle. Since our propellants were fired in motors having a range of exit diameters, we used the feature of the program that allows estimation of exit compositions for a set of several exit to throat area ratios. (In this case, the throat of the motor is considered to be the choke point, or opening of the smallest diameter. The exit is the exit of the motor nozzle. Using these definitions, the ratio of the exit:throat areas, A_e/A_t , must always be larger than 1.0.) In Table 15 are listed the ranges of exit/throat area ratios possible for each motor. In each of the predictions, we used the design pressure as the combustion chamber pressure. The throat pressure is defined to be the pressure at which the flow velocity is equal to the velocity of sound.

The iterative procedures used by the program are discussed in detail in Reference 27. Briefly, combustion temperature and equilibrium compositions are determined for an

TABLE 15

EXIT/THROAT AREA RATIO RANGES
TEST MOTOR CONFIGURATIONS

COMPOSITION	MINIMUM THROAT DIAMETER, INCHES	MAXIMUM THROAT DIAMETER, INCHES	NOMINAL EXIT* DIAMETER, INCHES	MINIMUM A_2/A_1	MAXIMUM A_2/A_1	NOMINAL A_2/A_1
D	0.50	0.707	1.0	1.125	6.25	4
H	0.261	0.261	1.0	8.26	22.94	14.7
L	0.28	0.28	1.0	7.17	19.93	12.76
Q	0.188	0.197	1.125	14.49	44.21	35.06

* These are estimated exit diameters. Actual exit diameters varied between 0.75 and 1.25 inches.

assigned chamber pressure and the reactant enthalpy. From the combustion compositions and temperature, the combustion entropy can be determined. Assuming isentropic expansion, the program then obtains a first estimate for the ratio of chamber pressure to throat pressure; from the throat pressure and the entropy, the actual gas velocity, the speed of sound, and the Mach number can be calculated; if the Mach number is not sufficiently close to unity, the pressure ratio is corrected and a further calculation of Mach number is done. Exit conditions for assigned exit-to-throat area ratios are also obtained from an initial estimate of the ratio of the chamber pressure to the exit pressure, followed by iterative correction. The converged value of pressure ratio for each area ratio is used as the initial estimate for the next area ratio.

We obtained the program, test case input, and output from the NASA Lewis Research Center²⁸. We were able to compile the program on our VAX 6000-420 computer and were able to reproduce the test case output with no problems. In our series of calculations the program has performed in a very reliable manner; we have had no difficulties with any of the iterative procedures failing to converge.

RESULTS AND DISCUSSION

In Tables 16 - 19 are listed the predicted mole fractions of various exhaust components over the range of potential ratios of exit areas to throat areas. (The full computer printouts for selected runs for each composition are included in Appendix C.) Note that there have been two independent checks of these computations³¹. First, CET86 computations of mole fractions of Composition H were checked against the "Blake" code and found to be in excellent agreement. (See discussion regarding Table 23, below). Secondly, the calculations were verified by running MUCET, a modified version of CET86 prepared by Eli Freedman & Associates for use with microcomputers. Results were identical to those reported here.

The model has a cut-off feature. Essentially, it can predict the levels of over 100 compounds, but will only report out those mole fractions which are larger than a user-specified value. For this work, a mole fraction of 5×10^{-7} was employed. The rationale for using this value was as follows. If it is assumed that there are about 2 moles of exhaust products in the ASCF chamber following a firing, a mole fraction of 5×10^{-7} would be equivalent to 1×10^{-6} moles of the particular product in the chamber. This assumption was in fact supported by the chemical characterization data (see above). For a compound with a nominal molecular weight of 100 g/mole, this translates to a concentration of $5 \mu\text{g}/\text{m}^3$, or 1.5 ppbv, in the 20 m^3 ASCF chamber. Few airborne compounds are considered to be a significant health risk at such low concentrations. In addition, unless a very large sample is acquired, it is usually difficult to confidently quantify such species at these low levels.

Using this criterion, with the exception of the metals in the exhaust products, the only compounds which were predicted to be present in the exhaust were carbon monoxide, carbon dioxide, hydrogen, water vapor, ammonia, and methane. In none of the cases did the model predict significant quantities of nitric oxide, despite the fact that NO was observed at levels near to or greater than 1 ppm on each burn.

Table 16
 Predicted Mole Fractions as a Function of Exit/Throat Area Ratios
 Composition D
 Chamber pressure = 2500 psia

A_e/A_t	1.1300	1.8600	2.2500	3.1300	5.1700	6.2500
Exit T, °K	2256.4	1894.1	1788.5	1626.8	1419.6	1355.0
Mole fractions						
CO	.37059	.35871	.35390	.34478	.32876	.32241
CO ₂	.14561	.15759	.16241	.17154	.18756	.19391
H ₂	.11245	.12448	.12931	.13844	.15445	.16080
H ₂ O	.23930	.22754	.22273	.21362	.19760	.19126
Cu(Total)	2.3949x10 ⁻³	2.4058x10 ⁻³	2.4062x10 ⁻³	2.4063x10 ⁻³	2.4063x10 ⁻³	2.4062x10 ⁻³
Pb(Total)	2.2823x10 ⁻³	2.3222x10 ⁻³	2.3276x10 ⁻³	2.3325x10 ⁻³	2.3352x10 ⁻³	2.3363x10 ⁻³
NH ₃	1.1109x10 ⁻⁵	8.7647x10 ⁻⁶	8.4223x10 ⁻⁶	8.2080x10 ⁻⁶	8.6068x10 ⁻⁶	8.8299x10 ⁻⁶
CO/CO ₂	2.545	2.276	2.179	2.010	1.753	1.663
NH ₃ /CO ₂	7.629x10 ⁻⁵	5.562x10 ⁻⁵	5.562x10 ⁻⁵	4.785x10 ⁻⁵	4.589x10 ⁻⁵	4.554x10 ⁻⁵
Chamber pressure = 3000 psia						
A_e/A_t	1.1300	1.8600	2.2500	3.1300	5.1700	6.2500
Exit T, °K	2256.8	1893.7	1788.1	1626.4	1420.8	1355.7
Mole fractions						
CO	.37061	.35869	.35388	.34475	.32888	.32248
CO ₂	.14560	.15761	.16243	.17156	.18744	.19384
H ₂	.11245	.12450	.12933	.13846	.15433	.16073
H ₂ O	.23933	.22752	.22271	.21359	.19772	.19133
Cu(Total)	2.3968x10 ⁻³	2.4059x10 ⁻³	2.4062x10 ⁻³	2.4634x10 ⁻³	2.4062x10 ⁻³	2.4063x10 ⁻³
Pb(Total)	2.2819x10 ⁻³	2.3219x10 ⁻³	2.3274x10 ⁻³	2.3322x10 ⁻³	2.3355x10 ⁻³	2.3365x10 ⁻³
NH ₃	1.3315x10 ⁻⁵	1.0519x10 ⁻⁵	1.0110x10 ⁻⁵	9.8554x10 ⁻⁶	1.0279x10 ⁻⁵	1.0565x10 ⁻⁵
CO/CO ₂	2.545	2.276	2.179	2.010	1.755	1.664
NH ₃ /CO ₂	9.145x10 ⁻⁵	6.674x10 ⁻⁵	6.224x10 ⁻⁵	5.745x10 ⁻⁵	5.484x10 ⁻⁵	5.450x10 ⁻⁵

A_e/A_t : Ratio of the exit area to throat area

Table 17
 Predicted Mole Fractions as a Function of Exit/Throat Area Ratios

Composition H

Chamber pressure = 5000 psia

A_e/A_t	8.3000	10.000	15.000	23.000
Exit T, °K	1575.0	1507.1	1372.2	1251.4
Mole fractions				
CO	.25795	.25360	.24311	.23079
CO ₂	.25776	.26229	.27332	.28608
H ₂	8.5609x10 ⁻²	9.0087x10 ⁻²	.10095	.11357
H ₂ O	.24704	.24278	.23242	.22018
HCl	4.5892x10 ⁻⁴	3.4824x10 ⁻⁴	1.8022x10 ⁻⁴	8.1443x10 ⁻⁵
KCl	1.3356x10 ⁻²	1.2799x10 ⁻²	1.0928x10 ⁻²	7.7913x10 ⁻³
KCl(l) ^a	0.0000 0	0.0000 0	0.0000 0	1.5516x10 ⁻³
NH ₃	2.5247x10 ⁻⁶	2.5729x10 ⁻⁶	2.7684x10 ⁻⁶	3.0523x10 ⁻⁶
CO/CO ₂	1.0007	.9669	.8895	.8067
HCl/CO ₂	1.7804x10 ⁻³	1.3277x10 ⁻³	6.5937x10 ⁻⁴	2.8469x10 ⁻⁴
NH ₃ /CO ₂	9.7947x10 ⁻⁶	9.8094x10 ⁻⁶	1.0129x10 ⁻⁵	1.0669x10 ⁻⁵

A_e/A_t : Ratio of the exit area to throat area
^a: Liquid

Table 18
 Predicted Mole Fractions as a Function of Exit/Throat Area Ratios

Composition L

Chamber pressure = 2500 psia

A_e/A_t	7.2000	10.000	15.000	20.000
Exit T, °K	1281.3	1175.4	1059.3	986.5
Mole fractions				
CO	.14681	.13536	.11945	.10732
CO ₂	.11988	.13129	.14697	.15895
HCl	.20072	.20084	.20139	.20167
H ₂ O	.25903	.24758	.23169	.21983
Al ₂ O ₃	4.5708x10 ⁻³	4.5704x10 ⁻³	4.5672x10 ⁻³	4.5669x10 ⁻³
BaCl ₂ (Total)	4.6571x10 ⁻⁴	4.6849x10 ⁻⁴	4.6850x10 ⁻⁴	4.6849x10 ⁻⁴
Cr ₂ O ₃ (a)	8.1900x10 ⁻⁴	8.1892x10 ⁻⁴	8.1835x10 ⁻⁴	8.1831x10 ⁻⁴
Cu(a)	0.0000 0	1.3842x10 ⁻⁴	8.3239x10 ⁻⁴	1.1224x10 ⁻³
NH ₃	9.6149x10 ⁻⁶	1.0736x10 ⁻⁵	1.2947x10 ⁻⁵	1.5182x10 ⁻⁵
CO/CO ₂	1.225	1.031	0.813	0.675
HCl/CO ₂	1.674	1.530	1.370	1.269
NH ₃ /CO ₂	8.020x10 ⁻⁵	8.177x10 ⁻⁵	8.809x10 ⁻⁵	9.551x10 ⁻⁵

A_e/A_t : Ratio of the exit area to throat area
 a: Solid

Table 19
 Predicted Mole Fractions as a Function of Exit/Throat Area Ratios

COMPOSITION Q

CHAMBER PRESSURE = 1480 psia

Ae/At	32.600	35.100	35.800
Exit T, °K	918.9	904.4	900.7
Mole Fractions			
CO	2.1030×10^{-1}	2.0683×10^{-1}	2.0590×10^{-1}
CO ₂	1.8391×10^{-1}	1.8732×10^{-1}	1.8823×10^{-1}
H ₂ O	1.0248×10^{-1}	9.9504×10^{-2}	9.8735×10^{-2}
NH ₃	1.5108×10^{-5}	1.5668×10^{-5}	1.5810×10^{-5}
ZrO ₂ (Total)	2.3203×10^{-3}	2.3216×10^{-3}	2.3220×10^{-3}
Pb	1.0228×10^{-3}	1.0234×10^{-3}	1.0236×10^{-3}
CH ₄	7.2073×10^{-4}	1.0005×10^{-3}	1.0889×10^{-3}
BI	1.0055×10^{-5}	1.3159×10^{-5}	1.3826×10^{-5}
CO/CO ₂	1.143	1.102	1.094
NH ₃ /CO ₂	8.215×10^{-5}	8.364×10^{-5}	8.399×10^{-5}

A_e/A_t: Ratio of the exit area to throat area

For many of the input parameters, the model was not particularly sensitive to substantial changes. For example, for Composition H, a nearly 3-fold change in the exit/throat area ratios decreased the predicted mole fraction of CO by less than 12%. The ratio of major components was not significantly altered. For Composition D, a 5-fold change in the A_e/A_t reduced the CO/CO₂ ratio by 35%. The ratios of minor to major components were typically affected to a greater degree. In many cases, mistakes made in the original entry of data into the model were difficult to identify, since the mistaken or modified entry resulted in such a small change in the data output. For example, considerable effort was placed into obtaining or calculating the best heats of formation for compounds present in the formulations. However, an exact value may not be particularly critical to the modeling projections. For example, in Table 20 are compared the mole fractions predicted by the model for a $\pm 5\%$ change in the heat of formation of ammonium perchlorate, which comprises nearly 75% of the starting formulation. The results of the manipulation show only minor changes in the predicted mole fractions. For example, the predicted mole fraction of HCl changed only in the fourth decimal place.

From the standpoint of predicting the composition of the exhaust products in the chamber, the model was not particularly effective. As stated previously, in no case did the model predict NO to be present at levels above 10 ppb, even though NO levels were experimentally observed near 1 ppm. In Table 21 are compared the ranges of observed and predicted ratios of carbon monoxide to carbon dioxide in the ASCF chamber. For Composition H, the predicted values were very close to those observed. For Composition L, the model was accurate to within a factor of 2 - 3. For the other two formulations tested, there was substantial disparity between observed and predicted values. In both of these cases, the model predicted a much higher fraction of CO to be present than that which was observed. If the model had been used to make a health risk projection, the risk from CO exposure would have been considerably overestimated.

The comparison of observed and predicted absolute concentration levels in the ASCF chamber is a much more complex task. Briefly, the moles of the elements present in the formulation were computed. Since we did not determine water vapor or hydrogen gas in the chemical characterization studies, it was assumed that all of the H present in the formulation was converted to water vapor. (From a functional standpoint of predicting the concentrations of other species, it makes no difference if the H present existed as water vapor or H₂ gas.) Next, the total number of moles measured in the chamber was calculated, assuming 100% efficiency of conversion of H to water in the chamber. Finally, the mole fractions of the various species were multiplied by the total number of moles present, and divided by the chamber volume, in order to estimate chamber concentrations of the target species. The results of these calculations are summarized in Table 22. In general, the model was very good at predicting the concentrations of metallic species. In the case of zirconium oxide for Composition Q, and copper for Composition D, there was substantial over-estimation of the concentrations. This may be due to settling of particulates containing

TABLE 20
Effect of \pm 5% Shift in Heat of Formation of Ammonium Perchlorate
Composition L

Predicted Mole Fractions

$H_f = -74109$. cal/mole				
A_e/A_t	7.2	10.0	15.0	20.0
Predicted Temperature, °K	1248.8	1146.3	1033.7	963.8
CO	.14393	.13194	.11561	.10325
CO ₂	.12259	.13431	.15041	.16255
CO/CO ₂	1.17	.98	.77	.64
H ₂ O	.25526	.24320	.22699	.21523
H ₂	.19284	.20402	.21948	.23066
HCl	.19924	.19992	.20044	.20076
N ₂	7.833×10^{-2}	7.826×10^{-2}	7.822×10^{-2}	7.823×10^{-2}
Cu(s)	1.583×10^{-3}	2.442×10^{-3}	3.070×10^{-3}	3.331×10^{-3}
NH ₃	1.143×10^{-5}	1.284×10^{-5}	1.566×10^{-5}	1.836×10^{-5}
$H_f = -67051$. cal/mole				
A_e/A_t	7.2	10.0	15.0	20.0
Predicted Temperature, °K	1300.9	1194.0	1075.7	1001.2
CO	.14912	.13778	.12215	.11017
CO ₂	.11748	.12854	.14394	.15578
CO/CO ₂	1.27	1.07	.85	.71
H ₂ O	.26048	.24902	.23337	.22157
H ₂	.18794	.19841	.21330	.22469
HCl	.19898	.19975	.20032	.20059
N ₂	7.836×10^{-2}	7.827×10^{-2}	7.821×10^{-2}	7.820×10^{-2}
Cu(s)	1.257×10^{-3}	2.240×10^{-3}	2.958×10^{-3}	3.260×10^{-3}
NH ₃	8.885×10^{-6}	9.774×10^{-6}	1.169×10^{-5}	1.367×10^{-5}

A_e/A_t : Ratio of the exit area to throat area

these species before they could be collected. For Compositions D and Q, the model substantially over-predicts CO and underestimates the amount of CO₂ produced. In the cases of the formulations which were expected to produce measurable amounts of HCl, the model predicted more HCl than was measured in both cases: It could be that in this case, the acquisition of the sample could be suspect. First, some of the HCl or potassium chloride could have been adsorbed on particulate matter which settled very rapidly in the chamber. In this case, the material would not reach the input to the continuous HCl analyzer. In addition, some of the HCl may have been lost in the short lengths of Teflon tubing leading from the chamber atmosphere to the analyzer.

TABLE 21
COMPARISON OF OBSERVED AND PREDICTED
CARBON MONOXIDE: CARBON DIOXIDE RATIOS

<u>Propellant Composition</u>	<u>Observed</u>		<u>Predicted</u>	
	<u>Minimum</u>	<u>Maximum</u>	<u>Minimum</u>	<u>Maximum</u>
D	0.0924	0.2265	1.663	2.545
H	1.028	1.160	0.8067	1.0007
L	1.817	2.473	0.675	1.225
Q	0.0622	0.0779	1.094	1.143

In terms of the trace organic vapor and particle phase constituents, the model correctly predicts that the concentrations of these species will be low. In fact, the observed levels of such species as benzene and benzo(a)pyrene were much less than 100 ppbv, or 1 $\mu\text{g}/\text{m}^3$, respectively. However, the number of toxic species which the model considers is limited, and it is certainly conceivable that a compound not considered by the model could be present at sufficiently high levels to warrant some health risk consideration

LIMITATIONS AND MODIFICATIONS

In addition to not considering all of the toxic species likely to be produced by the ignition of a predominantly organic matrix, the model does have several limitations. First, it is an equilibrium based system, and does not take into account those synthesis pathways which

may be governed predominantly by kinetic processes. Secondly, it assumes ideal gas behavior on the part of all of the gases produced. This assumption is not likely to be accurate over the entire range of conditions existing inside the rocket motor. However, from a practical standpoint, this may not be a severe limitation. For example, the magnitude of non-ideal gas effects depends primarily on the density and the temperature in the system. For the system in question, the largest densities occur in the chamber. Interestingly, the most dense gas (H), has a density of only 0.037 g/mL, which is not sufficiently large to induce substantial deviations from the ideal gas law. To illustrate this point, Freedman³¹ has used the "Blake" code to compute chamber concentrations (at 340.23 atmospheres pressure and a temperature of 3167° K) assuming both ideal and real gas equations of state. This was performed for Composition H, whose exhaust products were capable of reaching some of the higher temperatures in the study. The results are listed in Table 23. It is clear that the differences between the real and the ideal gaseous equations of state are very small. And although there are differences between the NASA-Lewis results and those from the "Blake" code, the differences are negligible from a practical standpoint and are due to differences in the thermodynamic data bases themselves.

Finally, and probably most importantly, the model assumes that all of the chemical processes are frozen at the point at which the exhaust gases exit the motor. There is a considerable body of evidence to suggest that this is not the case. For example, the model predicts that no significant production of NO will occur for any of the formulations tested. However, NO was in fact observed. We believe that its presence is due to the effect of the heated exhaust gases on the ambient air in the chamber. That is, the heat from the motor firing causes the formation of nitrogen monoxide. The production of NO is probably proportional to the duration of the flame contact with the air. For example, during run No. 5 for Composition D, the shock wave from the firing of the motor caused some damage to the chamber. A different nozzle was installed on the test motor used for burn #6. This lengthened the burn time, and reduced the pressure of the burn. Such resulted in some substantial differences between burns #5 and #6 for the Composition D motors. The change in the NO concentration is considerable. Probably, the increase in time that the flame is in contact with the air causes much more NO to be produced. Note also the change in the CO concentration from Run No. 5 to Run No. 6.

Following consultations with Dr. Eli Freedman, we decided to test the hypothesis that including a step in the computer calculations which would determine the influence of mixing the predicted exhaust gases with ambient air would lead to a more accurate prediction of the observed gas concentrations in the chamber. The model was revised to mix the exhaust gases with the ambient air at fixed ratios and at varying pressures and temperatures. As an example, the exit composition from propellant D (a formula which had initially yielded a relatively inaccurate prediction of the observed CO/CO₂ ratio) was selected as a "fuel" which could be mixed with air. Initial exit pressure and temperature were set at 39.5 atmospheres and 1837 °K, respectively. The "fuel" was mixed with ambient air in the ratios given in Table 24 to yield equilibrium compositions at two arbitrarily selected lower pressures. As indicated in Table 24, there was a substantial decrease in the CO/CO₂ ratio. The resulting ratio is much closer to that which was

observed experimentally than the ratio predicted by the unmodified model, suggesting that there is considerable mixture with ambient air and conversion of carbon monoxide to carbon dioxide between the vicinity of the motor exit and the analysis train. That the model does not consider the influence of mixing with ambient

TABLE 22

COMPARISON OF OBSERVED AND PREDICTED CONCENTRATIONS
OF EXHAUST CONSTITUENTS IN ASCF CHAMBER

CONSTITUENT	COMPOSITION D		COMPOSITION H		COMPOSITION L		COMPOSITION Q	
	Observed ^a	Predicted	Observed ^b	Predicted	Observed ^c	Predicted	Observed ^d	Predicted
Carbon Monoxide, ppm	282	943	296	240	154	171	84	542
Carbon Dioxide, ppm	1245	538	270	248	344	188	1324	491
NO, ppm	2.2	0°	3.7	0°	0.75	0°	1	0°
KCl/HCl, ppm	BMDL	0°	<1	14	114	270	BMDL	0°
Cu, mg/m ³	4.0	17	BMDL	0°	4.5	3.6	0.02	0°
Al ₂ O ₃ , mg/m ³	BMDL	0°	BMDL	0°	6.8	6.1	BMDL	0°
Pb, mg/m ³	37	55	BMDL	0°	16	21.9	BMDL	0°
ZrO, mg/m ³	BMDL	0°	BMDL	0°	<0.1	29.5	BMDL	0°

^a Run #5^b Average of Runs 1,3, & 4^c Average of Runs 1 - 4^d Gaseous components means of Runs 1, 2, 3; Particle component means of Runs 1 & 3^e Predicted using assumption that all H in formulation of H₂O during burn. See Text.^f Predicted mole fraction of component less than 0.5 x 10⁻³ cut off.

BMDL: Below Method Detection Limit

TABLE 23

Effect of Choice of Gaseous Equation of State on Computed Mole Fractions for Composition H^a

NAME	BLAKE		NASA-Lewis
	IDEAL	REAL	IDEAL
CO	0.2928486	0.2932262	0.29422
H ₂ O	0.2679565	0.2685877	0.27100
CO ₂	0.2183805	0.2180917	0.21722
N ₂	0.1346118	0.1346414	0.13459
H ₂	4.927155 x 10 ⁻²	4.886758 x 10 ⁻²	4.8588 x 10 ⁻²
HCl	8.636553 x 10 ⁻³	8.599959 x 10 ⁻³	
KOH	7.785912 x 10 ⁻³	7.757804 x 10 ⁻³	
KCl	7.232547 x 10 ⁻³	7.278343 x 10 ⁻³	
NO	1.281355 x 10 ⁻³	1.270143 x 10 ⁻³	
O ₂	5.792795 x 10 ⁻⁴	5.639095 x 10 ⁻⁴	
NH ₃	8.57131 x 10 ⁻⁶	8.776596 x 10 ⁻⁶	
CH ₂ O	2.823712 x 10 ⁻⁶	2.871074 x 10 ⁻⁶	
HCN	2.529327 x 10 ⁻⁶	2.631338 x 10 ⁻⁶	
Cl ₂	2.863636 x 10 ⁻⁷	2.811794x10 ⁻⁷	
COCl ₂	2.512875 x 10 ⁻¹⁰	2.628192 x 10 ⁻¹⁰	
K	1.164592 x 10 ⁻³	1.15023 x 10 ⁻³	8.4006 x 10 ⁻⁴
COCl	1.79761 x 10 ⁻⁶	1.84523 x 10 ⁻⁶	
OH	6.396093 x 10 ⁻³	6.222507 x 10 ⁻³	
KO	5.224935 x 10 ⁻⁵	5.182151 x 10 ⁻⁵	
H	3.155921 x 10 ⁻³	3.057469 x 10 ⁻³	
O	2.448266 x 10 ⁻⁴	2.370879 x 10 ⁻⁴	
N	1.259862 x 10 ⁻⁶	1.24317 x 10 ⁻⁶	
CHO	2.055275 x 10 ⁻⁵	2.080149 x 10 ⁻⁵	
Cl	3.638269 x 10 ⁻⁴	3.574871 x 10 ⁻⁴	

From Reference No. 30

air on the products of propellant firing has been observed by other investigators³². Snelson, et al. reported that double base propellants fired in Argon atmospheres produced mole fractions of CO which were much closer to those predicted by thermodynamic modeling than when the same propellants were fired in ambient air.

Table 24

Influence of Exhaust Gas Mixing with Air
on Carbon Monoxide/Carbon Dioxide Ratios

Composition D

	Fuel/Air = 5*		
Pressure, atm	39.5	5.0	1.0
Temperature, °K	1837	1300	1000
CO/CO ₂	1.44	1.08	0.74
	Fuel/Air = 3*		
Pressure, atm	39.5	5.0	1.0
Temperature, °K	1837	1300	1000
CO/CO ₂	1.16	0.88	0.61
	Fuel/Air = 1*		
Pressure, atm	39.5	5.0	1.0
Temperature, °K	1837	1300	1000
CO/CO ₂	0.31	0.25	0.17

* Considers exhaust gases from motor nozzle as "fuel."

RECOMMENDATIONS FOR FURTHER WORK

It would be interesting to compare these results with other computer models. Software is available with similar, but not identical methods of computation and data fitting³³.

It may be possible to extend the NASA Lewis model to account for nonideal gas equations of state for some of the major components, without involving major modifications to the program. However, any revision is not to be undertaken lightly; the program is some 5000 lines of Fortran and represents a very large investment of time and effort. The development of a new model would require a similar investment.

A thorough review of the thermal and transport property data base may seem to be desirable, in order to incorporate any new information available since the 1986 revision, and to have some additional assurance that the data have been entered correctly. However, there have only been 8 changes to the data base, and none have practical significance for this study³¹. And since transport properties are not a significant factor in this work, any changes should not have an effect on the conclusions.

It would be useful to model the chemical kinetics of these processes, using the software described in Reference 34. It should be noted, however, that a considerable amount of effort would be required to elucidate the reactions occurring in these events and to make estimates of the necessary rate constants. The Arrhenius constants and the activation energies for the hundreds of conversions processes are not available. In contrast, modeling the flow processes may be useful, since it could lead to a better understanding of the amount of air entrained with the exhaust during combustion.

It might be useful to do some experimental firings of the motors into inert atmospheres, such as argon, in order to test the air mixing hypothesis. However, such in and of itself would not aid in the refinement of the model.

Finally, alternatives to the "air entrainment" explanation as the source of disagreement between experiment and computation should be explored. For example, calculations described in this report were carried out for two possible cases: either the chemical reactions in the expanding flow from the combustion chamber maintain complete equilibrium from throat to the nozzle exit, or else the flow is completely frozen once it leaves the nozzle throat. But the intermediate case is also possible. That is, the flow may freeze somewhere between the throat and the exit. This could provide a possible explanation for the discrepancy between experiment and computation without requiring the assumption of entrained air. To implement such an approach, an adiabatic expansion calculation should be run. Initial estimates provided to the authors of this report suggest that this approach is feasible³¹. However, to take full advantage of such an approach, careful experimental determination of hydrogen and methane would have to be performed. Because of the complexities of such real time analyses, these measurements could not be performed.

REFERENCES

1. FM 6-20 (with C1), Fire Support in Combined Arms Operations, 30 Sep 1977.
2. FM 71-101, Infantry, Airborne, and Air Assault Division Operations, 26 Mar 1980.
3. AR 40-10, Health Hazard Assessment Program in Support of the Army Materiel Acquisition Decision Process, 15 Oct 1983.
4. AR 1000-1, Basic Policies for Systems Acquisition, 1 June 1983.
5. Characterization of Combustion Products from Military Propellants, IIT Research Institute, USASMRDC Contract DAMD17-80-C-0019.
6. Short-Term Intermittent Exposure to HCl (Draft Final Report), Enviro Control, Inc., USAMRDC Contract DAMD17-79-C-9125.
7. Hoke, S.H. and J.W. Carroll, Development and Evaluation of Atmospheric HCl Monitors, in Toxic Vapor Detection Technology (Propellants and Related Items) S&EPS Workshop, CPIA Publication 386, October 1983.
8. Letter, SGRD-UBG-M, 30 April 1984, subject: Medical Research Issues Associated with Stinger.
9. Letter, SGRD-UBG-M, 18 Oct 1984, subject: Development of a Coordinated Methodology Investigation/Medical Research Program for Evaluation of Gun and Rocket Combustion Products.
10. Letter, (2nd End), SGRD-UBG-M, 24 Feb 1984, subject: Stinger Exhaust Gas Measurement, TECOM Project No. 3-M1-000-MAN-031.
11. MFR, DASG-PSP, 28 Jan 1982, subject: RC1 Health Hazard Assessment, Multiple Launch Rocket System.
12. Minutes of Meeting, Standardization of Test and Evaluation Procedures for Chemical Hazards in New Material, 13-14 Octo 1982, DASG-PSP, dated 15 Oct 1982.
13. Letter, SGRD-PLC, 15 Jul 1981, subject: HELLFIRE Human Factors Engineering Analysis.
14. Letter, SGRD-OP, 4 April 1979, subject: US ROLAND, Health Hazard Assessment, ASARC III.
15. Letter, DRXHE-MI, 31 Oct 1980, subject: US ROLAND, Health Hazard Assessment, ASARC III.b.

16. Letter, SGRD-OP, 15 Feb 1979, subject: Health Hazard Assessment, US ROLAND, ARARC III.
17. Letter, DRSTE-CM-A, 15 Oct 1980, subject: Safety Release (Limited) for RAM Demonstration of US ROLAND at Ft. Lewis, WA.
18. Letter, STEWS-TE-MF, 2 Aug 1982, subject: Exhaust Gas Measurements on STINGER Firings.
19. Letter, STEWS-TE-MF, 21 June 1983, subject: STINGER Exhaust Gas Measurements Test Plan (TECOM Project 3-M-OCO-MAN-031, and endorsements (2) thereto).
20. Letter, STEWS-TE-RE, 14 Feb 1983, subject: HCl Gas From STINGER Firings.
21. Keith J. Laidler, Chemical Kinetics, McGraw-Hill Book Company, New York, 1965, (pp138)
22. R. A. Jenkins, C. V. Thompson, T. M. Gayle, C. Y. Ma, and B. A. Tomkins, Interim Report, "Characterization of Rocket Propellant Combustion Products - Description of Sampling and Analysis Methods for Rocket Exhaust Characterization Studies," ORNL/TM-11643, June 7, 1990.
23. W. H. Griest, R. A. Jenkins, B. A. Tomkins, J. H. Moneyhun, R. H. Ilgner, T. M. Gayle, C. E. Higgins, and M. R. Guerin, Final Report, "Sampling and Analysis of Diesel Engine Exhaust and the Motor Pool Workplace Atmosphere," ORNL/TM-10689, March 1, 1988. DTIC No. AD-A198464
24. B. A. Tomkins, R. A. Jenkins, W. H. Griest, R. R. Reagan, and S. K. Holladay, "Liquid Chromatographic Determination of Benzo(a)pyrene in Total Particulate Matter of Cigarette Smoke," J. Assoc. Off. Anal. Chem. 68(5), 935-940 (1985).
25. F.J. Zeleznik and S. Gordon, Calculation of Complex Chemical Equilibria, Ind. Eng. Chem. 60, 27-57(1960).
26. F.J. Zeleznik and S. Gordon, A General IBM 704 or 7090 Computer Program for Computation of Chemical Equilibrium Compositions, Rocket Performance, and Chapman-Jouguet Detonations, NASA TN D-1454, 1962.
27. S. Gordon and B.J. McBride, Computer Program for Calculation of Complex Chemical Equilibrium Compositions, Rocket Performance, Incident and Reflected Shocks, and Chapman-Jouguet Detonations, NASA SP-273, 1971; interim revision, 1976.
28. B.J. McBride, personal communication.

29. M.W. Zemansky, Heat and Thermodynamics, Fifth Edition, McGraw-Hill Book Company, New York, 1968. (pp. 279-281, 557-606).
30. D. Straub, Thermofluidynamics of Optimized Rocket Propulsions, Extended Lewis Code Fundamentals, Birkhaeuser Verlag, Basel, 1989.
31. Eli Freedman, Personal communication to Steve Hoke, USABRDL, February 12, 1991
32. A. Snelson, P. Ase, W. Bock, and R. Butler; "Characterization of Combustion Products of Military Propellants, FINAL REPORT, Volume II," AD-A167417, March, 1983
33. R.J. Kee, personal communication.
34. R.J. Kee, J.A. Miller, and T.H. Jefferson, CHEMKIN: A General-Purpose, Problem-Independent, Transportable Fortran Chemical Kinetics Code Package, Sandia National Laboratories Report SAND 80-8003, March 1980; A.E. Lutz, R.J. Kee, and J.A. Miller, SENKIN: A Fortran Program for Predicting Homogeneous Gas Phase Chemical Kinetics with Sensitivity Analysis, Sandia National Laboratories Report SAND 87-8248, February 1988.

Appendix A
Selected Rocket Propellant Formulations

Table A-1

COMPOSITION 'D' FORMULATION

Abbreviation	Constituent	Formula	Wt %	ΔH_f° (kcal/mole)
NC	Nitro Cellulose (12.6% N)	$C_8H_{7.55}O_{8.9}N_{2.45}$	49.0 ± 1.5	169.17
NG	Nitroglycerine	$C_3H_5N_3O_9$	40.6	-88.60
DNPA	Di-n-propyl adipate	$C_{12}H_{22}O_4$	3.0	
NDPA	2-Nitrodiphenyl amine	$C_{12}H_{11}N_2O_2$	2.0 ± 0.05	-16.71
	LC-12-6*	See note	5.3	
Wax	Candelilla wax	$C_{25}H_{48}O$	0.1	

* LC-12-6 is a mixture, consisting of 11.4% Copper, 36% Lead, 40.1% β -resorcylic acid ($C_7H_6O_4$) ($\Delta H_f^\circ = 190$ kcal/mole), and 12.5% 2-hydroxybenzoic acid ($C_7H_6O_3$, $\Delta H_f^\circ = -141$ kcal/mole)

* Heat of formation unavailable

Table A-2

COMPOSITION 'H' FORMULATION

Abbreviation	Constituent	Formula	Wt %	ΔH_f° (kcal/mole)
KClO ₄	Potassium perchlorate	KClO ₄	7.8-8.05	-103.43
NC	Nitrocellulose	C ₁₂ H ₁₅ N ₅ O ₂₀	54.60	169.17
NG	Nitroglycerine	C ₃ H ₅ N ₃ O ₄	35.50	-88.6
EC	Ethyl Centralite	C ₁₇ H ₂₀ N ₂ O	0.9 - 0.8	-25.1
C	Carbon Black	C	1.20	Ref.

The entry "Ref." in the heat of formulation column means that this is a reference element in the NASA-Lewis program.

Table A-3

COMPOSITION "L" FORMULATION

Abbreviation	Constituent	Formula	Wt. %	ΔH_f^* (kcal/mole)
AP	Ammonium Perchlorate	$\text{NH}_4 \text{ClO}_4$	73.93	-70.58
PVC	Polyvinyl Chloride	$(\text{C}_2 \text{H}_3 \text{Cl})$	11.67	8.41
DEHA	DI (2-ethyl hexyl) adipate	$\text{C}_{22} \text{H}_{42} \text{O}_4$	11.67	-308.0
CUOR	Copper chromite	$\text{Cu}_2 \text{O}_2 \text{O}_4$	0.97	Ref.
A1	Aluminum Powder	Al	0.99	Ref.
C	Carbon Black	C	0.05	Ref.
BACD	Stabilizer (Barium/Cadmium)	Ba-Cd	0.47	Ref.
SDSS	Sodium dioctyl sulfo succinate	$\text{C}_{20} \text{H}_{37} \text{O}_7 \text{SNa}$	0.083	*
GMO	Glycerol monooleate	$\text{C}_{21} \text{H}_{40} \text{O}_4$	0.083	*
PTD	Pentaerythritol dioleate	$\text{C}_{41} \text{H}_{78} \text{O}_5$	0.084	*

* Heat of formation unavailable

Table A-4

PROPELLANT 'Q' FORMULATION

	Constituent	Formula	Weight %	ΔH^*_f (Kcal/mole)
NG	Nitroglycerine	$C_3H_5N_3O_9$	11.36	-88.60
BTTN	Butane triol trinitrate	$C_4H_7N_3O_9$	11.36	-93.07
HMX	Cyclotetramethylene tetranitramine	$C_4H_8N_8O_8$	66.00	17.93
PGA	Polyglycol adipate	$C_{10}H_{18}O_5$	4.83	-282.9
N-100	Tri-functional isocyanate	C_2H_3NO	1.68	-23.55
MNA	N-methyl-p-nitroaniline	$C_7H_8N_2O_2$	0.75	*
4-NDPA	4-nitrodiphenylamine	$C_{12}H_{11}N_2O_2$	0.40	15.4
POP	Polycaprolactone polyol	$C_8H_{16}O_7$	0.34	-655.1
NC	Nitrocellulose	$C_{12}H_{18}N_8O_{20}$	0.34	169.17
	Lead Citrate	$Pb_3(C_6H_5O_7)_2 \cdot 3H_2O$	1.50	*
ZrC	Zirconium Carbide	ZrC	1.00	-48.5
C	Carbon Black	C	0.40	Ref.
TPB	Triphenyl bismuth	$Bi(C_6H_5)_3$	0.04	*

The entry 'Ref.' in the heat of formation column means that this is a reference element in the NASA-Lewis program

* Heats of formation unavailable

Appendix B

Trace Organic Vapor Phase Constituents Observed
In Selected Rocket Exhaust Atmospheres

Table B-1

Concentration of Trace Organic Vapor Phase Constituents
in ASCF Chamber

Compositions D and H

CONSTITUENTS	Concentrations, $\mu\text{g}/\text{m}^3$														
	Composition H				Composition D					Composition D					
	Blank 1	No. 1A	No. 2C	No. 2D	Blank 2	No. 1A	No. 2A	No. 2B	No. 3B	Blank 3	No. 1A	No. 2A	No. 2B	No. 3B	Blank 3
Trichlorofluoromethane						17.7	11.2		10.1						
Methylene chloride				8.91	11.9	9.29	6.39		2.11						
Trichloroethane	0.42	0.79		0.93		0.3	0.4								
Benzene	0.82	12.1	16.6	14.4	0.57	3.95	3.79	49.2	15.8						
Trichloroethylene		0.94		3.14											
Methylcrotonate			3.32	31.4	2.09	6.04	4.39	19.7	3.82	0.75					
C[1]-benzene		7.16		17	1.57	1.86	2.44	6.66	2.94	1.02					
C[3]-cyclopentane				0.85											
Chlorobenzene		2.9													
C[6]-cyclotrisiloxane	3.7	10.6	34.9	58.2	23.9	15.3	14	22.7	6.59	18.4					
C[2]-benzene	0.7		3.85		1.27	1.25	0.48								
C[2]-benzene		4.15		7.22			1.6								
Phenylacetylene		1.62	2.13	4.24				3.03	1.71						
Styrene		2.9	3.49	7.64											

Table B-1 (Page 2)
Compositions D and H

CONSTITUENTS	Concentrations, $\mu\text{g}/\text{m}^3$												
	Blank 1	Composition H						Composition D					
		No. 1A	No. 2C	No. 2D	Blank 2	No. 1A	No. 2A	No. 2B	No. 3B	Blank 3			
C[2]-benzene						0.56				0.76			
Octane	1.28												
Nonene			2.33										
Nonane			1.15										
Terpinene	1.7		4.67	1.19	0.79								
Terpinene			2										
C[2]-benzene										10.6			
C[3]-benzene	1.17		4.24		0.6								
C[3]-benzene	1.36		6.37										
C[1]-styrene			1.91		0.56								
Heptene									12			4.83	
Cyanobenzene										28		7.91	
Octene				7.11									
C[3]-benzene	1.09		1.66	0.9	0.51	0.56							
Decene	0.91	1.07	2.5		0.56								

Table B-1 (Page 3)
Compositions D and H

CONSTITUENTS	Concentrations, $\mu\text{g}/\text{m}^3$													
	Composition H							Composition D						
	Blank 1	No. 1A	No. 2C	No. 2D	Blank 2	No. 1A	No. 2A	No. 2B	No. 3B	Blank 3				
Decane		0.38		1.49			0.48			1.29				
Terpinene		1.02	1.84	2.59	1.12	0.98	0.8							
C[8]-cycloheptasiloxane	6.22	6.03	30.2	20	0.97	4.65	5.19	18.2	6.15	7.48				
Teripene		0.87		1.36				4.24						
C[3]-cyclopentane	2.67	6.03	3.26	4.67	25.4	9.75	5.99		0.66					
C[8]-cycloheptasiloxane			2.31											
C[3]-benzene								1.89	0.88					
C[3]-benzene		0.72												
C[4]-benzene				0.89										
C[3]-cyclopentane				1.87						8.16				
Terpinene										8.84				
Undecane		1.06	1.6	1.91	0.68	0.6	0.56		0.53	1.56				
C[1]-cyclohexanol	2.07	1.28	2.96	4.67	2.39	1.72				1.02				
C[4]-benzene		1.47												
C[3]-cyclopentane					1.19			8.32		0.75				
C[10]-cyclopentasiloxane		6.41	1.3	25.9	8.21	5.57	5.19	12.1	3.51	12.9				

Table B-1 (Page 4)
Compositions D and H

CONSTITUENTS	Concentrations, $\mu\text{g}/\text{m}^3$															
	Composition H				Composition D											
	Blank 1	No. 1A	No. 2C	No. 2D	Blank 2	No. 1A	No. 2A	No. 2B	No. 3B	Blank 3						
Naphthalene		2.79	4.44	11		1.49	1.2		7.91	8.84						
C[10]-cyclopentasiloxane		2.04														
C[3]-cyclopentane			0.77	1.91												
Dodecane		0.26		1.23												
C[3]-cyclopentane	1.7		1.24	2.16	1.87		5.99	29.5		1.22						
C[3]-cyclopentane	7.41	4.9	11.2	2.38						52.4						
C[12]-cyclohexasiloxan				0.51	38.8		1.92									
Tridecane				1.4				35.6								
C[12]-cyclohexasiloxane	0.89	0.91	16.6	44.1	4.4	1.35			1.71	8.16						
Tetradecane	1.26		0.95	1.66		0.38			0.57	0.75						
C[8]-benzoquinone	1.41			1.83						1.91						
C[9]-aminophenol	2.3		1.36	2.29				1.89								
Pentdecane																
C[12]-cyclohexasiloxane	4.74	0.64	5.92	21.2	1.72		3.2			4.42						
Diethylphthalate					4.18											
C[14]-cycloheptasiloxane						4.04			0.29							

Table B-1 (Page 5)
Compositions D and H

CONSTITUENTS	Concentrations, $\mu\text{g}/\text{m}^3$											
	Composition H				Composition D							
	Blank 1	No. 1A	No. 2C	No. 2D	Blank 2	No. 1A	No. 2A	No. 2B	No. 3B	Blank 3		
Hexadecane		1.17		1.1				0.75				
Diethylphthalate									19.1			
Diphenylamine							1.89		1.43			
Hexadecene	2.74	0.83	3.97			1.07						
Actadecane	8.15		2.84	1.02								
Heptadecane	1.48		1.18	0.64		0.88			0.95			
Nonadecane	2		.37	1.1					2.65			

• Missing values denote compound at levels below method detection limits

Table B-2

Concentration of Trace Organic Vapor Phase Constituents
in ASCF Chamber*

Composition I.

	RETENTION TIME (min)	SYSTEM BLANK ($\mu\text{g}/\text{m}^3$)	BLANK 1 ($\mu\text{g}/\text{m}^3$)	SAMPLE 1 ($\mu\text{g}/\text{m}^3$)	SAMPLE 2 ($\mu\text{g}/\text{m}^3$)	SAMPLE 3 ($\mu\text{g}/\text{m}^3$)	BLANK 2 ($\mu\text{g}/\text{m}^3$)
argon	0.2	2.420	2.330	4.210	13.200	14.390	
carbon dioxide	3.4	0.720	2.730		7.381	13.460	15.180
trichlorofluoroethane	10.1		0.270				
octamethyl-cyclotetrasiloxane	21.0	1.490	0.066	8.570		1.540	
mono- or di-sub. benzene	21.8			0.530			
hydroxy-N-phenyl-acetamide or isomers	24.6			1.290			
trimethylsilane compd	24.7	0.580					
octamethyl-cyclotetrasiloxane	25.8		0.106	5.820	0.217	2.050	0.149
hexamethyl-cyclotrisiloxane	27.9			1.370			
octamethyl-cyclotetrasiloxane	28.5			0.312			
decamethyl-cyclopentasiloxane	29.6			1.926		0.569	
dodmethyl-cyclohexasiloxane	33.4			0.496			
hexamethyl-cyclotrisiloxane	34.0	0.930					
hexamethyl-cyclotrisiloxane	42.3	4.680					

* Missing values denote compound at levels below method detection limits

Table B-3
Trace Organic Vapor Phase Constituents
in ASCF Chamber

Composition Q

Constituents	RET TIME, min	Concentrations, $\mu\text{g}/\text{m}^3$							
		SYSTEM BLANK	BLANK- 1	TSTAA -1	TSTAA- 2	TSTAB- 2	TSTAB- 4	TSTAA- 3	TSTABL -2
argon	0.2	2.420	1.898		0.750	0.071	1.787		2.581
carbon dioxide	3.4	0.720			1.654				
trichlorotrifluoroethane	10.1					0.018		1.217	
octamethyl-cyclotetrasiloxane	21.0	1.490							
hexamethyl-cyclotrisiloxane	21.3				0.081	0.036	1.168		0.207
hexamethyl-cyclotrisiloxane	22.7						0.043		
hexamethyl-cyclotrisiloxane	23.6						0.044		
trimethylsilane compd	24.7	0.580							
octamethyl-cyclotetrasiloxane	25.8		0.024			0.050	0.506		0.406
hydrocarbon	27.3					0.057			0.402
alkylalcohol	27.3			2.175					
hexamethyl-cyclotrisiloxane	27.9						0.080		
decamethyl- cyclopentasiloxane	29.6					0.012	0.074		0.277
naphthalene	31.8						0.072		
trimethyl-cyclobutanone	31.8		0.058	59.62 5		0.436		20.924	3.504
hexamethyl-cyclotrisiloxane	34.0	0.930							
octamethyl-cyclotetrasiloxane	36.6						0.080	0.423	
phthalate	39.2			18.20 0			0.064	7.122	
hexamethyl-cyclotrisiloxane	42.3	4.680							
phthalate	43.9				0.061				

Appendix C

Output from Selected Runs of Computer Model
NASA-Lewis CET-86

Table C-1
NASA - Lewis CET - 86
Output
Composition D

REACTANTS
 C 6.0000 0 9 9000 M 7.5000 M 2.43500
 C 5.0000 0 9 0000 M 5.0000 M 3.00000
 C 12.0000 0 4 0000 M 22.0000 M 0.00000
 C 12.0000 0 2.0000 M 11.0000 M 2.00000
 C 7.0000 0 4.0000 M 6.0000 M 0.00000
 C 7.0000 0 3.0000 M 6.0000 M 0.00000
 CU 1.0000 0 0.0000 0.0000 0.0000
 PB 1.0000 0.0000 0.0000 0.0000

NAMELISTS
 \$IMPTZ
 KASE = 402.
 P = 26*0.0000000E+00.
 T = 2500.000 . 25*0.0000000E+00.
 PSIA = F.
 MMHG = F.
 MSOM = F.
 V = 26*0.0000000E+00.
 RMD = 2500.000 . 25*0.0000000E+00.
 ERATIO = F.
 OF = F.
 FPCT = F.
 FA = F.
 MIX = 26*-1.000000
 TP = F.
 HP = F.
 SP = F.
 TV = F.
 UV = F.
 SV = F.
 RKT = F.
 SHOCK = F.
 DETM = F.
 TRACE = 5.000000000000000E-07.
 SO = 0.000000000000000E+00.
 SO = 0.0000000E+00.
 IDMS = F.
 IDEBUG = F.
 PHI = F.
 SIUNIT = F.
 IMHG = F.
 TRMSPT = F.
 TRPACC = 0.9999000000000000
 DIF = F.
 MODATA = F.
 U = 1.000000000000000E+30.
 H = 1.000000000000000E+30.
 \$END

MO IMPTZ VALUE GIVEN FOR OF, ERATIO, FA, OR FPCT
 SPECIES BEING CONSIDERED IN THIS SYSTEM
 J 3/78 C
 J 6/69 CM3
 J 6/69 CM
 J 12/69 C2
 BUR 84 METHYL CYANIDE
 L 4/85 ACETIC ACID
 BUR 84 AZOMETHANE
 J 9/66 CCO RAD
 BUR 84 ALLENE
 L 9/85 I-PROPYL RAD
 J 12/69 C4
 J 12/67 CM
 L 9/85 HYDROXYMETHYLENE
 J 6/66 CM RAD
 J 3/67 CM RAD
 BUR 84 CH3CO RAD
 L 4/85 (FORMIC ACID)2
 BUR 84 ETANOL
 J 12/69 C3
 BUR 84 C2H5 RAD
 L 9/85 N-PROPYL RAD
 BUR 84 BUTADIENE
 J 3/61 FORMALDEHYDE
 L 5/84 CHA
 J 9/65 CO
 BUR 84 KETENE
 L 4/85 ETHYLENE
 BUR 84 ETHYL OXIDE RAD
 J 3/67 CMC RAD
 BUR 84 CYCLOPROPENE
 L 4/85 PROPYLENE
 L 1/84 I-PROPANOL
 J 6/68 CARBON SUBOXIDE
 BUR 84 2-BUTYNE
 L 4/85 FORMIC ACID
 L 9/85 METHANOL
 J 9/65 CO2
 BUR 84 C2H3 RAD
 BUR 84 ACETALDEHYDE
 L 5/84 ETANINE
 J 3/61 CYANIDE
 BUR 84 PROPYLENE
 L 9/85 PROPYLENE OXIDE
 J 6/68 CARBON SUBOXIDE
 BUR 84 2-BUTYNE

0.0000 49.5000000
 0.0000 40.5999998
 0.0000 3.0000000
 0.0000 2.0000000
 0.0000 2.0000000
 0.0000 2.0000000
 0.0000 0.6000000
 0.0000 0.6000000
 0.0000 1.9000000
 -169170.00 S
 -88600.00 S
 -246000.00 S
 -16710.00 S
 -190000.00 S
 -141000.00 S
 0.00 S
 0.00 S
 J 3/61 FORMALDEHYDE
 L 5/84 CHA
 J 9/65 CO
 BUR 84 KETENE
 L 4/85 ETHYLENE
 BUR 84 ETHYL OXIDE RAD
 J 3/67 CMC RAD
 BUR 84 CYCLOPROPENE
 L 4/85 PROPYLENE
 L 1/84 I-PROPANOL
 J 6/68 CARBON SUBOXIDE
 BUR 84 2-BUTYNE

6	3	1626.83	-33.938	-43.707	-18.502	-26.014	-6.996	-12.378
7	6	1412.44	-35.532	-46.699	-18.720	-26.322	-6.458	-10.842
		ADD PB(L)						
7	3	1413.60	-35.526	-46.684	-18.723	-26.324	-6.461	-10.985
7	4	1419.58	-35.474	-46.587	-18.715	-26.314	-6.477	-10.998
		POINT ITN Y	CO	CO2	M2	MZ	CU(L)	PB
8	4	1359.67	-36.013	-64.817	-18.795	-26.424	-6.314	-10.862
		POINT ITN Y	CO	CO2	M20	MZ	CU(L)	PB
8	3	1354.19	-36.065	-64.958	-47.695	-26.434	-6.299	-10.849
		ADD CU(S)						
8	2	1358.00	-36.045	-64.876	-47.643	-26.443	-6.309	-10.858
		REMOVE CU(L)						
		POINT ITM Y	CO	CO2	M20	MZ	CU(S)	PB
8	2	1354.86	-36.061	-64.943	-47.686	-26.436	-6.303	-10.851
8	3	1355.04	-36.060	-64.939	-47.683	-26.435	-6.303	-10.851

THEORETICAL ROCKET PERFORMANCE ASSUMING EQUILIBRIUM COMPOSITION DURING EXPANSION

PC = 2500 0 PSIA
CASE NO. 402

CHEMICAL FORMULA		M		N		O		FUEL		ENERGY		STATE		TEMP	
WT FRACTION (SEE NOTE)	CAL/MOL	WT FRACTION (SEE NOTE)	CAL/MOL	WT FRACTION (SEE NOTE)	CAL/MOL	WT FRACTION (SEE NOTE)	CAL/MOL	WT FRACTION (SEE NOTE)	CAL/MOL	WT FRACTION (SEE NOTE)	CAL/MOL	WT FRACTION (SEE NOTE)	CAL/MOL	WT FRACTION (SEE NOTE)	CAL/MOL
FUEL C	6.00000	0	9.90000	M	7.50000	M	2.45000	0.489217	-169170.000	S	298.15				
FUEL C	3.00000	0	5.00000	M	5.00000	M	5.00000	0.405351	-88600.000	S	298.15				
FUEL C	12.00000	0	4.00000	M	22.00000	M	2.00000	0.029952	-246000.000	S	298.15				
FUEL C	12.00000	0	2.00000	M	11.00000	M	2.00000	0.019968	-16710.000	S	298.15				
FUEL C	7.00000	0	4.00000	M	6.00000	M	6.00000	0.023962	-190000.000	S	298.15				
FUEL C	7.00000	0	3.00000	M	6.00000	M	6.00000	0.006589	-141000.000	S	298.15				
FUEL CU	1.00000							0.005990	0.000	S	298.15				
FUEL PB	1.00000							0.018970	0.000	S	298.15				

D/F = 0.0000 PERCENT FUEL = 100.0000 EQUIVALENCE RATIO = 1.3413 PHI = 0.0000

CHAMBER	THRUST	EXIT	EXIT	EXIT	EXIT	EXIT	EXIT	EXIT	EXIT	EXIT	EXIT	EXIT	EXIT	EXIT	EXIT
1.0000	1.7820	2.9358	7.6207	10.333	17.047	35.065	45.555	25.493	25.535	25.586	25.592	25.592	25.592	25.592	25.592
170.11	95.460	57.553	22.323	16.483	9.9791	4.8514	3.7343	-1.00076	-1.00102	-1.00075	-1.00002	-1.00217	-1.00137	-1.00137	-1.00137
2731.8	2469.1	2256.4	1894.1	1788.5	1626.8	1419.6	1355.0	1.0158	1.0131	1.0131	1.0009	1.0333	1.0219	1.0219	1.0219
1.9346E-2	1.2031E-2	7.946E-3	3.674E-3	2.912E-3	1.912E-3	1.0658E-3	8.6020E-4	0.4503	0.4581	0.4347	0.4138	0.4088	0.4489	0.4375	0.4375
-531.80	-648.71	-741.65	-894.04	-937.58	-1003.93	-1089.09	-1117.26	1.2163	1.2168	1.2237	1.2320	1.2334	1.2232	1.2232	1.2232
U. CAL/G	-744.74	-840.86	-917.03	-1041.16	-1076.49	-1130.27	-1222.39	1041.0	989.1	947.6	870.8	807.9	751.1	734.1	734.1
S. CAL/G	-6734.39	-6234.80	-5864.88	-5194.60	-4998.33	-4697.68	-4312.29	0.000	1.000	1.999	2.176	2.460	2.875	3.015	3.015
2.2705	2.2705	2.2705	2.2705	2.2705	2.2705	2.2705	2.2705	2.2705	2.2705	2.2705	2.2705	2.2705	2.2705	2.2705	2.2705

PERFORMANCE PARAMETERS

AE/AT	1.0000	1.1300	1.8600	2.2500	3.1300	5.1700	6.2500
ESTAR. FT/SEC	4752	4752	4752	4752	4752	4752	4752
CP	0.693	0.915	1.202	1.272	1.372	1.491	1.528
IVAC. LB-SEC/LB	183.7	191.6	213.6	220.1	229.8	242.0	246.0
ISP. LB-SEC/LB	100.9	135.1	177.5	187.9	202.7	220.2	225.7

MOLE FRACTIONS

FORMALDEHYDE	3.8024E-6	2.2754E-6	1.4699E-6	6.7596E-7	5.3041E-7	3.6196E-7	2.1354E-7	1.7672E-7
FORMIC ACID	5.9694E-6	3.2709E-6	1.9430E-6	7.4904E-7	5.5637E-7	4.3112E-7	1.7469E-7	1.3735E-7
CH4	7.1355E-8	7.0490E-8	8.0376E-8	1.6105E-7	2.2956E-7	4.7519E-7	1.8569E-6	3.1490E-6
CO	3.7961E-1	3.7529E-1	3.7059E-1	3.5871E-1	3.5390E-1	3.4478E-1	3.2876E-1	3.2241E-1
CO2	1.3602E-1	1.4075E-1	1.4561E-1	1.5759E-1	1.6241E-1	1.7154E-1	1.8756E-1	1.9391E-1
CU	2.3248E-3	1.4945E-3	6.1020E-4	6.7801E-5	2.8684E-5	5.8601E-6	4.0357E-7	1.4581E-7
CUO	5.816E-6	1.266E-6	1.775E-7	1.808E-8	3.367E-10	1.339E-11	7.199E-14	1.001E-14
H	1.5647E-3	2.1141E-3	5.333E-4	1.885E-4	5.166E-5	4.800E-6	8.982E-11	1.973E-11
H2O	5.3027E-6	3.1758E-6	2.0610E-6	9.6146E-7	6.2525E-7	8.404E-8	1.1237E-8	5.2840E-9
HCO	1.0486E-5	3.8734E-6	1.5055E-6	2.0186E-7	9.8602E-8	2.2937E-8	3.2268E-9	2.7087E-9
H2CO	1.0295E-1	1.0757E-1	1.1245E-1	1.2448E-1	1.2931E-1	1.3844E-1	1.5445E-1	1.6080E-1
H2	2.4734E-1	2.4375E-1	2.3930E-1	2.2754E-1	2.2273E-1	2.1365E-1	1.9760E-1	1.9126E-1
H2O	1.073E-6	3.506E-7	1.213E-7	1.264E-8	5.637E-9	1.366E-9	1.446E-10	6.268E-11
H2O2	1.7570E-3	1.3476E-3	1.1109E-3	8.7647E-4	8.4223E-4	8.2080E-4	8.6088E-4	8.8299E-4
H2O	8.964E-5	2.255E-5	5.633E-6	2.348E-7	7.134E-8	8.352E-9	2.473E-10	6.607E-11

CYCLOHEXENE	M-HEXYL RAD	BENZALDEHYDE	TOLUENE	CRESOL	1-HEPTENE	M-HEPTYL RAD
M-HEPTANE	1-OCTENE	M-OCTYL RAD	OCTANE	ISO-OCTANE	M-NONYL RAD	M-HEPTYL RAD
AZULENE	M-DECYL RAD	O-BIPHENYL RAD	BIPHENYL	JET-A(IG)	BIBENZYL	M-HEPTYLENE
MHD2	MHD3	MHD2	MHM2	MZD	M	MCO
MH	MHZOH	MZD	MZD	MZM2	MZMA	MZMA
MZO	MZD	MZDA	MZD	M3	M3M	O3
C(GR)	BENZENE(L)	TOLUENE(L)	OCTANE(L)	JET-ALL	CU(S)	CU(L)
CUO(S)	CUO(S)	CUOZM(S)	CUZO(L)	CUZO(L)	MZO(S)	MZO(L)
PB(S)	PB(L)	PBO(RD)	PBO(YW)	PBO(L)	PBO(S)	PBO(S)

NOTE. WEIGHT FRACTION OF FUEL IN TOTAL FUELS AND OF OXIDANT IN TOTAL OXIDANTS

REACTANTS	C	6.0000	0	9.9000	M	7.5300	M	2.4500	0.0000	49.500000	-149170.00	S	298.150	F
C	3.0000	0	9.0000	M	5.0000	M	3.0000	0.0000	0.0000	40.599998	-88400.00	S	298.150	F
C	12.0000	0	4.0000	M	22.0000	M	0.0000	0.0000	0.0000	3.000000	-246000.00	S	298.150	F
C	11.0000	0	2.0000	M	11.0000	M	2.0000	0.0000	0.0000	2.000000	-14710.00	S	298.150	F
C	7.0000	0	4.0000	M	6.0000	M	0.0000	0.0000	0.0000	2.400000	-190000.00	S	298.150	F
C	7.0000	0	3.0000	M	8.0000	M	0.0000	0.0000	0.0000	0.400000	-141000.00	S	298.150	F
CU	1.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.00	S	298.150	F
PB	1.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	1.900000	0.00	S	298.150	F

NAMELISTS

```

$IMPTZ
KASE = 403.
T = 26*0.0000000E+00.
PSIA = 3000.000 . 25*0.0000000E+00.
MNHG = F.
MSDM = F.
RHO = 26*0.0000000E+00.
ERATIO = 3000.000 . 25*0.0000000E+00.
OF = F.
FPCT = F.
FA = F.
MIX = 26*-1.000000
TP = F.
HP = F.
SP = F.
TV = F.
UY = F.
SV = F.
RKT = F.
SHOCK = F.
DETM = F.
TRACE = 5.000000000000000E-07.
SO = 0.000000000000000E+00.
IONS = F.
IOEBUG = F.
PHI = 0.
SUMIT = F.
JUNC = F.
TRMSPI = F.
TRPACC = 0.9999000000000000
DIF = F.
MODATA = F.
U = 1.000000000000000E+30.
H = 1.000000000000000E+30
$END

```

NO IMPTZ VALUE GIVEN FOR OF. EORAT. FA. OR FPCT

```

$KRTIMP = T.
EOL = T.
FRDZ = T.
SUBAR = 13*0.000000000000000E+00.
SUPAR = 1.1300000000000000
2.2500000000000000 . 3.1300000000000000
6.2500000000000000 . 7*0.000000000000000E+00.
PCP = 22*0.000000000000000E+00.
TCEST = 3800.000
MFZ = I
$END

```

OF = 0.000000

ENTHALPY (KG-MOL)(DEG K)/KG	EFFECTIVE FJEL HPP(Z)	EFFECTIVE OXIDANT HPP(L)	MIXTURE MSUBO
-0.26761290E+03	0.0000000E+00	0.0000000E+00	-0.26761290E+03
KG-FORM.WT./KG	BOP(I,Z)	BOP(I,L)	BOP(I)
C 0.20227483E-01	0.0000000E+00	0.0000000E+00	0.20227483E-01
O 0.35316637E-01	0.0000000E+00	0.0000000E+00	0.35316637E-01
H 0.27585951E-01	0.0000000E+00	0.0000000E+00	0.27585951E-01
N 0.99408661E-02	0.0000000E+00	0.0000000E+00	0.99408661E-02
CU 0.94268964E-04	0.0000000E+00	0.0000000E+00	0.94268964E-04
PB 0.91552358E-04	0.0000000E+00	0.0000000E+00	0.91552358E-04
POINT ITM Y	MZ0	MZ	CU
1 18 2733.10 -29.310	-35.626	-17.460	-24.773
2 5 2464.09 -30.034	-36.881	-17.638	-24.976
ADD CU(L)			
2 3 2471.06 -30.047	-36.859	-17.647	-24.985
2 3 2470.79 -30.048	-36.861	-17.648	-24.986
PC/PT= 1.783035 T = 2471.06			
PC/PT= 1.783035 T = 2470.79			
POINT ITM Y	MZ0	MZ	CU(L)
3 4 2264.82 -30.735	-38.028	-17.800	-8.266
3 4 2256.71 -30.724	-38.078	-17.806	-8.252
3 2 2256.80 -30.724	-38.078	-17.806	-8.252
4 6 1880.35 -32.323	-40.885	-18.097	-7.551
4 5 1893.65 -32.259	-40.768	-18.087	-7.578
4 2 1893.69 -32.259	-40.768	-18.087	-7.578
5 5 1782.29 -32.832	-41.816	-18.180	-7.345
5 4 1788.13 -32.800	-41.758	-18.175	-7.358
6 5 1627.37 -33.732	-43.518	-18.318	-6.998
6 3 1626.43 -33.738	-43.529	-18.319	-6.995
7 6 1411.95 -35.353	-46.524	-23.538	-6.457
ADD PB(L)			
7 3 1418.43 -35.340	-46.492	-18.544	-6.464
7 4 1420.85 -35.285	-46.388	-18.555	-6.481
POINT ITM Y	CO2	MZ	CU(L)
8 4 1360.71 -35.824	-64.611	-18.614	-6.317
POINT ITM Y	CO2	MZ0	CU(L)
8 3 1354.84 -35.879	-64.762	-47.504	-6.300
ADD CU(S)			
8 2 1358.00 -35.862	-64.693	-47.461	-6.309
REMOVE CU(L)			
POINT ITM Y	CO2	MZ	CU(S)
8 2 1355.52 -35.875	-64.747	-47.495	-6.304
8 3 1355.70 -35.874	-64.742	-47.491	-6.305

THEORETICAL ROCKET PERFORMANCE ASSUMING EQUILIBRIUM COMPOSITION DURING EXPANSION

PC = 3000 0 PSIA
CASE NO. 403

CHEMICAL FORMULA		M 7.35000		M 2.45000		ENERGY STATE		TEMP
FUEL	C 6.00000	O 9.90000	H 7.35000	M 2.45000	WT FRACTION (SEE NOTE)	CAL/MOL	STATE	DEC K
FUEL C	3.00000	0	0	0	0.489217	-169170.000	S	298.15
FUEL C	3.00000	0	0	0	0.405351	-89600.000	S	298.15
FUEL C	12.00000	0	0	0	0.029952	-246000.000	S	298.15
FUEL C	7.00000	0	0	0	0.019968	-16710.000	S	298.15
FUEL C	7.00000	0	0	0	0.023962	-190000.000	S	298.15
FUEL C	7.00000	0	0	0	0.006589	-141000.000	S	298.15
FUEL CU	1.00000	0	0	0	0.005990	0.000	S	298.15
FUEL PB	1.00000	0	0	0	0.018970	0.000	S	298.15

O/F = 0.0000 PERCENT FUEL = 100.0000 EQUIVALENCE RATIO = 1.9413 PMI = 0.0000

CHAMBER	THROAT	EXIT	EXIT	EXIT	EXIT	EXIT	EXIT
1.0000	1.7830	2.9579	7.6264	10.341	17.059	35.054	45.558
204.14	114.49	69.014	26.767	19.741	11.967	5.8231	4.4808
2733.1	2470.8	2256.8	1893.7	1788.1	1626.4	1420.8	1355.7
2.3207-2	1.4423-2	9.5289-3	4.4072-3	2.2943-3	1.2746-3	1.0319-3	1.0319-3
-531.80	-648.87	-741.86	-894.25	-937.37	-1004.10	-1089.14	-1157.36
-744.82	-841.30	-917.26	-1041.33	-1076.65	-1130.41	-1189.45	-1222.32
-6698.23	-6223.27	-5823.21	-5161.01	-4972.36	-4673.83	-4293.02	-4176.24
2.2363	2.2363	2.2363	2.2363	2.2363	2.2363	2.2363	2.2363
25.496	25.542	25.569	25.585	25.586	25.587	25.601	25.619
-1.00072	-1.00157	-1.00064	-1.00009	-1.00005	-1.00002	-1.00184	-1.00113
1.0146	1.0233	1.0112	1.0016	1.0008	1.0003	1.0282	1.0185
0.4482	0.4528	0.4320	0.4134	0.4109	0.4087	0.4426	0.4331
1.2170	1.2181	1.2245	1.2321	1.2335	1.2347	1.2248	1.2264
1041.5	989.8	947.9	870.8	846.6	807.8	731.8	734.6
0.0000	1.000	1.399	2.000	2.177	2.461	2.873	3.013

PERFORMANCE PARAMETERS

AE/AT	1.0000	1.1300	1.8600	2.2500	3.1100	5.1700	6.2500
ESTAR, FT/SEC	4753	4753	4753	4753	4753	4753	4753
CF	0.683	0.915	1.202	1.272	1.372	1.491	1.528
IVAC, LB-SEC/LB	183.8	191.6	213.6	220.1	229.8	242.0	246.0
Isp, LB-SEC/LB	100.9	135.2	177.6	187.9	202.7	220.2	225.7

MOLE FRACTIONS

FORMALDEHYDE	4.5435-6	2.7288-6	1.7627-6	8.0834-7	6.3620-7	4.3419-7	2.5605-7	2.1192-7
FORMIC ACID	7.1682-6	3.9532-6	2.3304-6	8.9830-7	6.6829-7	4.1149-7	2.0988-7	1.6481-7
CO4	1.0282-7	1.0065-7	1.1535-7	2.3224-7	3.3481-7	4.8654-7	6.2250-6	4.4849-6
CO2	3.7966-1	3.7534-1	3.7061-1	3.8697-1	3.5388-1	3.4873-1	3.2888-1	3.2248-1
CO	2.3119-3	1.2588-3	5.1023-4	5.6316-5	3.8045-5	4.8590-6	3.4421-7	1.9384-1
CU	5.813-6	1.075-6	1.487-7	1.497-9	2.619-10	1.105-11	6.251-14	8.549-15
CU2	4.290-5	1.810-5	4.464-6	1.565-7	4.280-8	3.971-9	7.732-11	1.6777-11
H	1.4354-3	6.7233-4	3.0883-4	5.1223-5	2.6023-5	7.6443-6	1.0426-6	4.8891-7
HCM	6.3624-6	3.8083-6	2.4714-6	1.1532-6	9.1504-7	6.3498-7	3.8682-7	3.2478-7
HCMO	1.1526-5	4.2647-6	1.6511-6	2.0611-7	1.0772-7	3.0620-8	4.2486-9	2.0146-9
HNCO	2.3289-6	1.2291-6	7.0136-7	2.4417-7	1.7369-7	9.9024-8	4.3901-8	3.2639-8
H2	1.0796-1	1.0756-1	1.1245-1	1.2450-1	1.2933-1	1.3846-1	1.5423-1	1.6073-1
H2O	2.4747-1	2.4383-1	2.3933-1	2.2732-1	2.2271-1	2.1359-1	1.9772-1	1.9133-1
NH2	1.180-6	3.864-7	1.330-7	1.381-8	6.156-9	1.491-9	1.605-10	6.918-11
NH3	2.1066-5	1.6133-5	1.3313-5	1.0519-5	1.0110-5	9.8354-6	1.0279-5	1.0565-5
NO	8.246-5	2.084-5	5.160-6	2.134-7	6.478-8	7.550-9	2.319-10	6.1255-11

LYCLOHEXENE	M-MEYL RAD	BENZALDEHYDE	1-HEPTENE	N-HEPTYL RAD
N-HEPTANE	1-OCTENE	N-OCTYL RAD	N-NONYL RAD	NAPHTHLENE
AZULENE	N-DECYL RAD	O-BIPHENYL RAD	BIBENZYL	MNO
MNO2	MNO3	MNO2	N	MCO
NH	MNO4	MNO2	MNO2	MZMA
MNO	MNO5	MNO2	MNO2	O3
C(IGR)	BENZENE(L)	TOLUENE(L)	MJM	CU(L)
CUO(S)	CU(S)	CUO(S)	CU(S)	MZO(L)
PB(S)	PB(L)	PBO(L)	PBO2(S)	PBO4(S)

NOTE. WEIGHT FRACTION OF FUEL IN TOTAL FUELS AND OF OXIDANT IN TOTAL OXIDANTS

Table C-2
NASA - Lewis CET - 86
Output
Composition H

6 3 1251.37 -56.918 -37.961 -42.819 -68.063 -50.022 -27.118

THEORETICAL ROCKET PERFORMANCE ASSUMING EQUILIBRIUM COMPOSITION DURING EXPANSION

PC = 3000.0 PSIA
CASE NO. 208

CHEMICAL FORMULA
 FUEL K 1.00000 0 4.00000 CL 1.00000
 FUEL C 6.00000 0 9.00000 H 7.50000 M 2.45000
 FUEL C 3.00000 0 9.00000 H 5.00000 N 3.00000
 FUEL C 17.00000 H 20.00000 O 1.00000 M 2.00000
 FUEL E 1.00000

O/F = 0.0000 PERCENT FUEL = 100.0000 EQUIVALENCE RATIO = 1.3340 PHI = 0.0000

PC/P	CHAMBER	INLET	EXIT	EXIT	EXIT	WT FRACTION	ENERGY	STATE	TEMP
						(SEE NOTE)	CAL/MOL		DEG K
1.0000	1.7652	63.857	82.035	140.42	244.52	0.078000	-103430.000	S	298.15
340.23	192.74	5.3280	4.1474	2.4229	1.3914	0.546000	-169170.000	S	298.15
3163.4	2905.8	1575.0	1507.1	1372.2	1251.4	0.353000	-88600.000	S	298.15
3.6485-2	2.2697-2	1.1626-3	9.4615-4	6.0768-4	3.8360-4	0.009000	-25100.000	S	298.15
536.68	658.89	1212.76	1239.95	1294.58	1345.44	0.012000	0.000		0.00
761.28	864.54	1323.74	1346.10	1390.94	1433.28				
7393.34	6957.33	4626.68	4506.37	4268.70	4057.80				
2.1675	2.1675	2.1675	2.1675	2.1675	2.1675				
27.989	28.079	28.202	28.212	28.241	28.309				
-1.00371	-1.00189	-1.00081	-1.00058	-1.00129	-1.01123				
1.0748	1.0399	1.0115	1.0144	1.0107	1.1844				
0.5282	0.4769	0.4039	0.4088	0.4133	0.6061				
1.1786	1.1885	1.2160	1.2134	1.2125	1.1782				
1032.4	1011.2	731.4	699.9	658.0					
0.000	1.000	3.165	3.302	3.598	3.953				

PERFORMANCE PARAMETERS

AE/AT	1.0000	8.3000	10.0000	15.0000	23.0000
CSTAR, FT/SEC	4928	4928	4928	4928	4928
CF	0.673	1.584	1.615	1.677	1.732
IVAC, LB-SEC/LB	189.9	262.5	266.0	273.1	279.7
ISP, LB-SEC/LB	103.1	242.5	247.4	256.8	265.3

MOLE FRACTIONS

FORMALDEHYDE	2.7435-6	1.6194-6	9.1811-8	7.7084-8	5.3337-8	3.6505-8
FORMIC ACID	1.0412-5	5.7875-6	1.6383-7	1.2999-7	7.9736-8	4.8577-8
H ₂ O	5.7423-9	4.4399-9	3.5754-8	5.5107-8	1.5707-7	5.0636-7
CO	2.9577-1	2.9229-1	2.5795-1	2.5360-1	2.4311-1	2.3039-1
CO ₂	2.3511-6	8.7621-7	5.2421-11	2.0411-11	2.3511-12	2.1741-13
C ₂ H ₄	2.1600-1	2.2113-1	2.5776-1	2.6229-1	2.7337-1	2.8408-1
CL	2.5811-4	1.3251-4	2.2311-8	8.7341-9	9.8881-10	8.6091-11
CL ₂	9.2661-7	2.1561-7	7.0911-15	1.1891-15	1.9491-17	2.1057-17
H	3.0335-3	1.8939-3	5.2374-6	2.8060-6	6.6789-7	1.8028-7
H ₂	2.6045-6	1.5186-6	9.2377-8	7.8615-8	5.5888-8	3.9460-8
H ₂ O	2.0081-5	9.0671-6	8.3526-9	4.5951-9	1.0339-9	2.2021-10
MCL	6.1897-3	5.2033-3	4.5692-4	3.8824-4	1.8022-4	8.1843-5
MNCO	2.3115-6	1.2876-6	2.6876-8	1.9703-8	1.1000-8	5.9332-9
MNO	1.6231-6	5.3651-7	1.7821-12	7.0113-13	3.5481-14	1.5741-15
MOL	6.6111-6	1.3591-6	8.4391-14	1.5571-14	3.5981-14	1.5631-15
M ₂	4.9034-7	5.0971-7	8.5609-7	9.0087-7	1.0095-7	1.1357-7
M ₃	2.7086-1	2.7318-1	2.4704-1	2.4278-1	2.3242-1	2.2018-1
M ₄	2.3641-6	6.8111-7	1.1151-12	2.9831-13	1.4811-14	5.7871-16
M ₅	8.2420-4	7.3034-4	5.2314-5	3.7366-5	1.6401-5	6.0995-6

KCL 9.2315-3 1.0373-2 1.3356-2 1.2799-2 1.0928-2 7.7913-3
 KH 3.0715-5 1.8597-5 8.5838-8 4.9147-8 1.3567-8 3.0024-9
 KD 3.654 -5 1.430 -5 1.571-10 4.687-11 2.842-12 1.251-13
 KOM 5.5599-3 4.5773-3 4.0628-4 3.1077-4 1.6377-4 7.5344-5
 KZCL2 3.6550-5 4.6738-5 1.0310-3 1.3680-3 2.3958-3 3.2463-3
 N 7.470 -7 1.958 -7 6.001-14 1.309-14 4.026-16 9.303-18
 NH 2.305 -6 7.498 -7 6.907-12 2.207-12 1.640-13 9.895-15
 NH2 2.300 -6 9.581 -7 4.077-10 2.004-10 4.031-11 7.194-12
 NH3 8.7851-6 6.2663-6 2.5247-6 2.5729-6 2.7486-6 3.0533-6
 NO 1.186 -3 4.811 -4 9.623 -9 3.119 -9 2.411-10 1.494-11
 NO2 5.731 -7 1.148 -7 1.291-15 2.019-16 2.917-18 2.993-20
 N2 1.3469-1 1.3548-1 1.3633-1 1.3638-1 1.3652-1 1.3665-1
 N2O 5.218 -7 1.574 -7 5.594-13 1.642-13 1.010-14 5.031-16
 O 2.367 -4 7.273 -5 2.815-11 1.667-12 1.667-13 3.450-15
 OH 6.4368-3 3.2034-3 5.6405-7 2.2740-7 2.8217-8 2.9224-9
 O2 5.191 -4 1.567 -4 3.727-11 7.444-12 1.842-13 3.323-15
 KCL(L) 0.0000 0 0.0000 0 0.0000 0 0.0000 0 1.5516-3

ADDITIONAL PRODUCTS WHICH WERE CONSIDERED BUT WHOSE MOLE FRACTIONS WERE LESS THAN 0.50000E-06 FOR ALL ASSIGNED CONDITIONS

C	CCL	CCL2	CCL3	CCL4	CM	CMCL
CH	CH2	CH2CL2	CH3	CH3CL	CH3CL	METHYLOXIDE
CH3CL	CH3O	CH3O2	CH3OH	CH3OH	C2	METHYLOXIDE
CH3OH	CH3O2	CH3O2H	CH3O2H	CH3O2H	C2H2	C2H2
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H4	C2H4
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H6	C2H6
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H8	C2H8
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H10	C2H10
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H12	C2H12
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H14	C2H14
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H16	C2H16
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H18	C2H18
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H20	C2H20
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H22	C2H22
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H24	C2H24
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H26	C2H26
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H28	C2H28
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H30	C2H30
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H32	C2H32
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H34	C2H34
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H36	C2H36
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H38	C2H38
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H40	C2H40
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H42	C2H42
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H44	C2H44
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H46	C2H46
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H48	C2H48
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H50	C2H50
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H52	C2H52
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H54	C2H54
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H56	C2H56
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H58	C2H58
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H60	C2H60
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H62	C2H62
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H64	C2H64
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H66	C2H66
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H68	C2H68
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H70	C2H70
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H72	C2H72
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H74	C2H74
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H76	C2H76
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H78	C2H78
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H80	C2H80
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H82	C2H82
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H84	C2H84
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H86	C2H86
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H88	C2H88
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H90	C2H90
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H92	C2H92
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H94	C2H94
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H96	C2H96
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H98	C2H98
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H100	C2H100
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H102	C2H102
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H104	C2H104
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H106	C2H106
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H108	C2H108
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H110	C2H110
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H112	C2H112
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H114	C2H114
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H116	C2H116
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H118	C2H118
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H120	C2H120
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H122	C2H122
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H124	C2H124
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H126	C2H126
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H128	C2H128
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H130	C2H130
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H132	C2H132
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H134	C2H134
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H136	C2H136
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H138	C2H138
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H140	C2H140
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H142	C2H142
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H144	C2H144
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H146	C2H146
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H148	C2H148
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H150	C2H150
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H152	C2H152
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H154	C2H154
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H156	C2H156
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H158	C2H158
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H160	C2H160
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H162	C2H162
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H164	C2H164
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H166	C2H166
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H168	C2H168
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H170	C2H170
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H172	C2H172
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H174	C2H174
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H176	C2H176
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H178	C2H178
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H180	C2H180
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H182	C2H182
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H184	C2H184
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H186	C2H186
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H188	C2H188
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H190	C2H190
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H192	C2H192
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H194	C2H194
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H196	C2H196
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H198	C2H198
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H200	C2H200
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H202	C2H202
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H204	C2H204
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H206	C2H206
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H208	C2H208
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H210	C2H210
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H212	C2H212
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H214	C2H214
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H216	C2H216
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H218	C2H218
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H220	C2H220
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H222	C2H222
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H224	C2H224
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H226	C2H226
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H228	C2H228
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H230	C2H230
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H232	C2H232
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H234	C2H234
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H236	C2H236
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H238	C2H238
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H240	C2H240
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H242	C2H242
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H244	C2H244
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H246	C2H246
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H248	C2H248
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H250	C2H250
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H252	C2H252
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H254	C2H254
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H256	C2H256
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H258	C2H258
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H260	C2H260
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H262	C2H262
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H264	C2H264
CH3O2H	CH3O2H	CH3O2H	CH3O2H	CH3O2H	C2H266	

THEORETICAL ROCKET PERFORMANCE ASSUMING FROZEN COMPOSITION DURING EXPANSION

PC = 5000.0 PSIA
CASE NO. 208

CHEMICAL FORMULA
FUEL K 1.00000 0 4.00000 CL 1.00000
FUEL C 6.00000 0 9.00000 M 2.45000
FUEL C 3.00000 0 9.00000 H 5.00000 M 3.00000
FUEL C 17.00000 M 20.00000 0 1.00000 M 2.00000
FUEL C 1.000000

O/F = 0.0000 PERCENT FUEL = 100.0000 EQUIVALENCE RATIO = 1.3340 PMF = 0.0000

WT FRACTION (SEE NOTE) ENERGY CAL/MOL STATE TEMP DEC K
0.078000 -103430.000 S 298.15
0.346000 -169170.000 S 298.15
0.355000 -88600.000 S 298.15
0.009000 -23100.000 S 298.15
0.012000 0.000 0.000

CHAMBER THROAT EXIT EXIT
PC/P 1.0000 1.7792 66.410 85.697 148.53 263.93
P. ATN 340.23 191.23 5.1231 3.9701 2.2906 1.2891
T. SEC K 3163.4 2861.2 1477.4 1406.3 1262.1 1124.3
RHO. G/CC 3.6685-2 2.2797-2 1.1828-3 9.6293-4 6.1904-4 3.9111-4
H. CAL/G -536.68 -659.81 -1200.66 -1226.76 -1278.82 -1327.48
U. CAL/G -761.28 -862.95 -1305.56 -1326.61 -1368.43 -1407.30
S. CAL/G -7393.34 -6861.46 -4403.04 -4274.90 -4014.49 -3764.33
2.1675 2.1675 2.1675 2.1675 2.1675 2.1675

M. MOL WT 27.989 27.989 27.989 27.989 27.989 27.989
CP. CAL/(G)(K) 0.4092 0.4055 0.3485 0.3650 0.3571 0.3486
GAMMA (S) 1.2099 1.2122 1.2387 1.2415 1.2482 1.2358
SON VEL./M/SEC 1066.3 1013.1 737.3 720.2 684.1 647.6
MACH NUMBER 0.000 1.000 3.197 3.537 3.643 3.972

PERFORMANCE PARAMETERS
AE/AT 1.0000 8.3000 10.000 15.000 23.000
CSTAR. FT/SEC 4888 4888 4888 4888 4888
CF 0.681 1.582 1.613 1.673 1.727
IVAC. LB-SEC/LB 188.9 259.4 267.8 275.6
ISP. LB-SEC/LB 103.5 240.4 245.0 254.1 262.3

MOLE FRACTIONS
FORMALDEHYDE 0.00000 0.00000 0.00001 0.00002 0.00004 0.00006
CO2 0.21600 0.00000 0.00000 0.00000 0.00000 0.00000
H2O 0.00000 0.00000 0.00000 0.00000 0.00000 0.00000
H2 0.27086 0.00000 0.00000 0.00000 0.00000 0.00000
N 0.00003 0.00000 0.00000 0.00000 0.00000 0.00000
NO 0.00000 0.00000 0.00000 0.00000 0.00000 0.00000
O 0.00119 0.00000 0.00000 0.00000 0.00000 0.00000
OH 0.00024 0.00000 0.00000 0.00000 0.00000 0.00000

ADDITIONAL PRODUCTS WHICH WERE CONSIDERED BUT WHOSE MOLE FRACTIONS WERE LESS THAN 0.50000E-06 FOR ALL ASSIGNED CONDITIONS
C CCL CM3 CCL2 CM3 CCL3
CML3 CML4 CML5 CML6 CML7 CML8 CML9 CML10 CML11 CML12
CML13 CML14 CML15 CML16 CML17 CML18 CML19 CML20 CML21 CML22
CML23 CML24 CML25 CML26 CML27 CML28 CML29 CML30 CML31 CML32
CML33 CML34 CML35 CML36 CML37 CML38 CML39 CML40 CML41 CML42
CML43 CML44 CML45 CML46 CML47 CML48 CML49 CML50 CML51 CML52
CML53 CML54 CML55 CML56 CML57 CML58 CML59 CML60 CML61 CML62
CML63 CML64 CML65 CML66 CML67 CML68 CML69 CML70 CML71 CML72
CML73 CML74 CML75 CML76 CML77 CML78 CML79 CML80 CML81 CML82
CML83 CML84 CML85 CML86 CML87 CML88 CML89 CML90 CML91 CML92
CML93 CML94 CML95 CML96 CML97 CML98 CML99 CML100

CYCLOPENTADIENE	CYCLOPENTANE	1-PENTENE	7-PENTYL RAD	N-PENTYL RAD	PENTANE	ISOPENTANE
CN3C(CS)2CH3	NEKATRIENE	PHENYL RAD	PHENOLY RAD	BENZENE	PHENOL	CYCLOHEXENE
N-HEXYL RAD	TOLENE	CRESOL	1-HEPTENE	N-HEPTYL RAD	N-HEPTANE	1-OCTENE
N-OCTYL RAD	OCTANE	ISO-OCTANE	N-NONYL RAD	NAPHTHLENE	AZULENE	N-DECYL RAD
O-BIPHENYL RAD	BIPHENYL	JET-A(IG)	CLCN	CLQZ	CLZ	CLZO
MNOZ	MNO3	MZM2	KCN	K2	KZC2M2	KZ02M2
M7M	MZ0M	M0CL	M0ZEL	M03	MZM2	MZ2M02
C(OR)	MZ03	MZ0A	M205	M3	M3M	O3
K(S)	BENZENE(L)	TOLENE(L)	OCTANE(L)	JET-A(L)	MZ0(L)	MZ0(L)
KON(B)	K(L)	KCN(S)	KCN(L)	KCL(S)	KCL(L)	KON(A)
MNACL(A)	KON(L)	K02(S)	KZC03(S)	KZC03(L)	KZ0(S)	KZ02(S)
	MNACL(B)					

NOTE. WEIGHT FRACTION OF FUEL IN TOTAL FUELS AND OF OXIDANT IN TOTAL OXIDANTS

REACTANTS
 K 1.0000 0 4.0000 CL 1.0000 0.0000 8.050000 -103430.00 S 298.150 F
 C 4.0000 0 9.0000 M 2.5000 M 2.4500 0.0000 34.599998 -169170.00 S 298.150 F
 C 3.0000 0 9.0000 P 5.0000 M 3.0000 0.0000 35.500000 -88400.00 S 298.150 F
 C 17.0000 M 20.0000 0 1.0000 M 2.0000 0.0000 0.900000 -25100.00 S 298.150 F
 C 1.0000 0 0.0000 0.0000 0.0000 0.0000 1.200000 0.00 0.000

NAMELISTS
 \$IMPTZ
 KASE = 26*0.0000000E+00, ZOR
 T = 5000.000 .25*0.0000000E+00.
 P PSIA = 1.
 MMHG = 0.
 MSOM = 0.
 V = 26*0.0000000E+00.
 RHO = 5000.000 .25*0.0000000E+00.
 ERATIO = 0.
 OF = 0.
 FPCT = 0.
 FA = 0.
 MIX = 26*-1.000000
 TP = 0.
 MP = 0.
 TV = 0.
 UV = 0.
 SV = 0.
 RET = 0.
 SHOCK = 0.
 DETM = 0.
 TRACE = 5.000000000000000E-07.
 SO = 0.000000000000000E+00.
 IONS = 0.
 IOEBUG = 0.
 PHJ = 0.
 SIUMIT = 0.
 IMHG = 0.
 TRMSPT = 0.
 TAPACC = 0.999900000000000
 DIF = 0.
 MODATA = 0.
 U = 1.000000000000000E+30.
 M = 1.000000000000000E+30.
 \$END

NO IMP12 VALUE GIVEN FOR OF, EQRAY, FA, OR FPCT
 \$KRTMP
 COL = 1.
 PROZ = 1.
 SUBAR = 13*0.000000000000000E+00, 10.000000000000000
 SUPAR = 8.300000000000000
 PCP = 15.000000000000000, 23.000000000000000, 9*0.000000000000000E+00.
 TCEST = 22*0.000000000000000E+00, 3800.000
 MIZ = 1
 \$END

OF = 0.000000
 ENTHALPY (KG-MOL)(DEG K)/KG EFFECTIVE FUEL EFFECTIVE OXIDANT MIXTURE
 MSUBO
 MPP(L) MPP(L)
 -0.27033240E+03 0.0000000E+00 -0.27033240E+03

KG-FORM	WT./KG	POINT	ITM	T	MCL	CO	CO2	MCL	CO2	MCL	CO2	MCL	CO2	MCL	CO2	MCL	CO2	MCL	CO2
K		1	20	3166.98	-42.330	-28.939	-42.330	-30.453	-42.330	-30.453	-42.330	-30.453	-42.330	-30.453	-42.330	-30.453	-42.330	-30.453	-42.330
D		2	6	2911.78	-43.144	-29.567	-43.144	-31.387	-43.144	-31.387	-43.144	-31.387	-43.144	-31.387	-43.144	-31.387	-43.144	-31.387	-43.144
CL		2	3	2910.09	-43.150	-29.571	-43.150	-31.392	-43.150	-31.392	-43.150	-31.392	-43.150	-31.392	-43.150	-31.392	-43.150	-31.392	-43.150
C		2	3	2910.09	-43.150	-29.571	-43.150	-31.392	-43.150	-31.392	-43.150	-31.392	-43.150	-31.392	-43.150	-31.392	-43.150	-31.392	-43.150
H		2	2	2910.08	-43.150	-29.571	-43.150	-31.392	-43.150	-31.392	-43.150	-31.392	-43.150	-31.392	-43.150	-31.392	-43.150	-31.392	-43.150
N		2	2	2910.08	-43.150	-29.571	-43.150	-31.392	-43.150	-31.392	-43.150	-31.392	-43.150	-31.392	-43.150	-31.392	-43.150	-31.392	-43.150
		3	3	1509.55	-52.444	-35.004	-52.444	-38.543	-52.444	-38.543	-52.444	-38.543	-52.444	-38.543	-52.444	-38.543	-52.444	-38.543	-52.444
		4	3	1509.55	-52.444	-35.014	-52.444	-38.557	-52.444	-38.557	-52.444	-38.557	-52.444	-38.557	-52.444	-38.557	-52.444	-38.557	-52.444
		5	3	1511.21	-52.421	-35.355	-52.421	-39.283	-52.421	-39.283	-52.421	-39.283	-52.421	-39.283	-52.421	-39.283	-52.421	-39.283	-52.421
		5	3	1511.21	-52.421	-35.322	-52.421	-39.265	-52.421	-39.265	-52.421	-39.265	-52.421	-39.265	-52.421	-39.265	-52.421	-39.265	-52.421
		5	3	1516.50	-54.448	-36.674	-54.448	-40.896	-54.448	-40.896	-54.448	-40.896	-54.448	-40.896	-54.448	-40.896	-54.448	-40.896	-54.448
		5	3	1516.50	-54.448	-36.677	-54.448	-40.901	-54.448	-40.901	-54.448	-40.901	-54.448	-40.901	-54.448	-40.901	-54.448	-40.901	-54.448
		6	6	1249.79	-56.861	-37.986	-56.861	-42.799	-56.861	-42.799	-56.861	-42.799	-56.861	-42.799	-56.861	-42.799	-56.861	-42.799	-56.861
		6	3	1253.40	-56.863	-37.961	-56.863	-42.786	-56.863	-42.786	-56.863	-42.786	-56.863	-42.786	-56.863	-42.786	-56.863	-42.786	-56.863
		6	3	1254.79	-56.826	-37.943	-56.826	-42.758	-56.826	-42.758	-56.826	-42.758	-56.826	-42.758	-56.826	-42.758	-56.826	-42.758	-56.826

THEORETICAL ROCKET PERFORMANCE ASSUMING EQUILIBRIUM COMPOSITION DURING EXPANSION

PC = 5000 0 PSIA
CASE NO. 208

CHEMICAL FORMULA
FUEL K 1.00000 0 4.00000 CL 1.00000 M 2.45000
FUEL C 6.00000 0 9.00000 H 7.50000 N 3.00000
FUEL C 3.00000 0 9.00000 M 5.00000 N 3.00000
FUEL C 17.00000 H 20.00000 O 1.00000 N 2.00000
FUEL C 1.00000

O/F = 0.0000 PERCENT FUEL = 100.0000 EQUIVALENCE RATIO = 1.3312 PMI = 0.0000

CHAMBER	THROAT	EXIT	EXIT	EXIT	EXIT	WT FRACTION (SEE NOTE)	ENERGY CAL/MOL	STATE	TEMP DEG K
1.0000	1.7648	63.795	81.952	140.27	244.29	0.080299	-103430.000	S	298.15
340.23	192.78	5.3331	6.1516	2.4255	1.5927	0.344638	-169170.000	S	298.15
3167.0	2910.1	1579.3	1511.2	1376.2	1254.8	0.354115	-88600.000	S	298.15
3.6712-2	2.2712-2	1.1630-3	9.8643-4	6.0785-4	3.8369-4	0.008978	-25100.000	S	298.15
-537.20	-659.29	-1213.11	-1240.31	-1294.78	-1345.89	0.011970	0.000	S	0.00
-761.64	-864.85	-1354.11	-1346.34	-1391.42	-1433.80				
-7394.79	-6960.43	-4632.74	-4312.60	-4274.67	-4062.95				
2.1653	2.1653	2.1653	2.1653	2.1653	2.1653				
28.041	28.132	28.239	28.269	28.299	28.366				
-1.00379	-1.00184	-1.00083	-1.00101	-1.00133	-1.01173				
1.0764	1.0408	1.0118	1.0148	1.0213	1.1921				
0.5300	0.4779	0.4038	0.4066	0.4152	0.6131				
1.1748	1.0179	1.2157	1.2151	1.2122	1.1773				
1031.8	1010.8	751.6	734.9	790.1	658.0				
0.000	1.000	3.164	3.301	3.596	3.953				

PERFORMANCE PARAMETERS

AE/AT	1.0000	8.3000	10.000	13.000	23.000
CSTAR, FT/SEC	4927	4927	4927	4927	4927
CF	0.673	1.584	1.615	1.677	1.732
IVAC, LB-SEC/LB	189.8	262.4	266.0	273.1	279.7
ISP, LB-SEC/LB	103.1	242.5	247.3	256.7	265.3

MOLE FRACTIONS

FORMALDEHYDE	2.6983-6	1.5921-6	9.0204-8	7.5734-8	5.2402-8	3.5878-8
FORMIC ACID	1.0366-5	5.7635-6	1.6323-7	1.2951-7	7.9439-8	4.8342-8
CO	2.9422-5	2.9072-1	2.5672-1	2.5742-1	2.4204-1	2.2982-1
COEL	2.418	6.9041	7.5583	11.2182	11.2534	12.2308
CO2	2.1722-1	2.2241-1	2.5074-1	2.6323-1	2.7416-1	2.8466-1
CL	2.678	4.1381	4.2423	4.9526	4.9109	4.8486
CLO	9.821	7.2306	7.8185	15.383	15.309	17.2562
H	3.0461-3	1.9091-3	5.4497-6	7.9190-6	7.0245-7	5.2262-7
M	2.5459-6	1.4834-6	9.0296-8	7.6672-8	5.4493-8	3.8482-8
MCD RAD	2.000	5.9051	6.8502	9.4498	9.1869	9.2270
MCL	6.3228-3	5.3228-3	4.7386-4	3.6007-4	1.867	2.270
MNCO	2.3663-6	1.2745-6	2.5993-8	1.9354-8	1.8703	4.5038
MNO	2.365	6.6492	7.147	12.6208	13.8924	14.741
MCL	1.697	6.5641	7.2425	12.6208	13.8924	14.741
M02	6.879	6.617	6.560	12.6208	13.8924	14.741
M2	4.8488	2.0387	5.5804	8.7072	9.9829	11.1237
M20	2.7100	1.7341	1.4659	2.4360	2.3339	2.2125
M20Z	2.431	6.7055	7.1221	12.3285	13.1652	14.6484
K	8.4006	7.4531	4.4454	3.8829	3.1737	5.6473
KCL	9.5778-3	1.0743-2	1.3783-2	1.3216-2	1.1307-2	8.1459-3

KM	3.1177-5	1.8906-5	8.9166-8	5.1188-8	1.4016-8	1.4016-8	1.1716-9
KO	3.807-5	1.499-5	1.754-10	5.200-11	3.197-12	1.420-13	
KOM	5.6854-3	4.6827-3	4.1927-4	3.2113-4	1.6983-4	7.8621-5	
KZCLZ	3.9053-5	4.9623-5	1.0598-3	1.4040-3	2.4537-3	3.3843-3	
N	7.625-7	2.015-7	6.612-14	1.452-14	4.537-16	1.0544-17	
NH	2.325-6	7.607-7	7.357-12	2.565-12	1.776-13	1.075-14	
NH2	2.293-6	9.577-7	4.187-10	2.065-10	4.177-11	1.474-12	
NH3	8.6170-6	6.1392-6	2.855-6	2.508-6	2.685-6	2.9623-6	
NO	1.217-3	4.971-4	1.046-8	3.430-9	2.665-10	1.658-11	
NO2	1.3459-1	1.215-7	1.481-15	2.536-16	3.438-18	3.548-20	
N2O	3.356-7	1.646-7	6.077-13	1.791-13	1.116-14	5.374-16	
O	2.448-4	7.592-5	3.163-11	6.723-12	1.920-13	3.994-15	
OM	6.5574-3	3.2810-3	6.0321-7	2.4423-7	3.0614-8	3.1817-9	
O2	5.432-4	1.656-4	4.246-11	8.544-12	2.131-13	3.905-15	
KCL(L)	0.0000 0	0.0000 0	0.0000 0	0.0000 0	0.0000 0	1.4174-3	

ADDITIONAL PRODUCTS WHICH WERE CONSIDERED BUT WHOSE MOLE FRACTIONS WERE LESS THAN 0.5000E-06 FOR ALL ASSIGNED CONDITIONS

C	CCL	CELZ	CELZ	CELZ	CCL3	CCL4	CM	CKCL
CHA	CH2	CH2CL2	CM	CM3	CM3	CM3 RAD	HYDROXYETHYLENE	METHYLOXIDE
C2H3 RAD	METHANOL	CM	CM3	CM3	CM3 RAD	CM3 RAD	COCL2	C2
(FORMIC ACID)2	CZCL2	CZCL6	C2H RAD	C2H RAD	C2H RAD	ETHYLENE	ACETYLENE	ACETIC ACID
ALLENE	METHYL CYANIDE	CH3CO RAD	ETHYL OXIDE RAD	ETHANE	ETHANE	ACETALDEHYDE	DIETHYL ETHER	ETHANOL
1-PROPANE	CYANOGEN	CCO RAD	C3	PROPYLENE	PROPYLENE OXIDE	CYCLOPROPANE	CYCLOPROPENE	PROPYLENE
1-3-BUTADIENE	1-PROPANOL	CYCLOPROPANE	CARBON SUBOXIDE	CA	BUTADIENE	1-PROPYL RAD	1-BUTENE	N-PROPYL RAD
1-BUTYL RAD	2-BUTYNE	2-BUTYNE TRANS	M-BUTYL RAD	2-BUTENE CIS	ISOBUTENE	CYCLOBUTADIENE	CARBON SUBNITRID	BUTAN-1EN-3YN
CYCLOPENTADIENE	5-BUTYL RAD	M-BUTYL RAD	M-BUTYL RAD	1-PENTENE	ISOPENTANE	CYCLOBUTADIENE	PENTANE	(ACETIC ACID)2
CH3(CM3)2CM3	CYCLOPENTANE	1-PENTENE	PHENYL RAD	1-PENTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	C5
M-MEYL RAD	HEXATRIENE	PHENYL RAD	PHENYL RAD	PHENYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
O-BIPHENYL RAD	TOLUENE	CHESOL	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
MDO	OCTANE	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O	BIPHENYL	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O2	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O4	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O5	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O6	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O7	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O8	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O9	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O10	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O11	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O12	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O13	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O14	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O15	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O16	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O17	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O18	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O19	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O20	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O21	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O22	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O23	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O24	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O25	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O26	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O27	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O28	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O29	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O30	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O31	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O32	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O33	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O34	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O35	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O36	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O37	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O38	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O39	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O40	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O41	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O42	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O43	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O44	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O45	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O46	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O47	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O48	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O49	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O50	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O51	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O52	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O53	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O54	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O55	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O56	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O57	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O58	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O59	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O60	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O61	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O62	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O63	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O64	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O65	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O66	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O67	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O68	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O69	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O70	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O71	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O72	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O73	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O74	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O75	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O76	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O77	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O78	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O79	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O80	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O81	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O82	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O83	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O84	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O85	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O86	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O87	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O88	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O89	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O90	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O91	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O92	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O93	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O94	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O95	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O96	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O97	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O98	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O99	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	
M2O100	MDO	1,5-CYCLO-OCTANE	1-HEPTYL RAD	1-HEPTYL RAD	ISOPENTANE	CYCLOBUTADIENE	ISOPENTANE	

NOTE: WEIGHT FRACTION OF FUEL IN TOTAL FUELS AND OF OXIDANT IN TOTAL OXIDANTS

THEORETICAL ROCKET PERFORMANCE ASSUMING FROZEN COMPOSITION DURING EXPANSION

PC = 5000.0 PSIA
CASE NO. 208

CHEMICAL FORMULA		WT FRACTION (SEE NOTE)		ENERGY CAL/MOL		STATE		TEMP DEG K	
FUEL K	1.00000 0 4.00000	CL	1.00000						
FUEL C	6.00000 0 9.00000	M	7.50000						
FUEL C	3.00000 0 9.00000	M	5.00000						
FUEL C	17.00000 M 20.00000	O	1.00000						
FUEL C	1.00000	M	2.40000						
		N	3.00000						
		M	2.00000						
		N	2.40000						
		M	3.00000						
		N	2.40000						
		M	2.00000						
		N	2.40000						
		M	2.00000						
		N	2.40000						
		M	2.00000						
		N	2.40000						

O/F = 0.0000 PERCENT FUEL = 100.0000 EQUIVALENCE RATIO = 1.3312 PMI = 0.0000

CHAMBER	THRUST	EXIT	EXIT	EXIT	EXIT
1.0000	1.7750	66.361	95.629	148.359	263.63
340.23	191.74	3.1269	3.9733	2.2928	1.2203
3167.0	2864.7	1480.5	1409.2	1265.0	1127.0
3.6712	2.2813	1.1838	0.6348	6.1937	3.9131
537.20	480.23	1200.83	1228.93	1278.99	1327.66
741.40	863.42	1305.75	1326.80	1368.64	1407.53
7394.79	6843.34	4406.52	4278.43	4018.13	3768.04
2.1653	2.1653	2.1653	2.1653	2.1653	2.1653
28.041	28.041	28.041	28.041	28.041	28.041
0.4088	0.4051	0.3682	0.3647	0.3569	0.3484
1.2097	1.2120	1.2183	1.2412	1.2478	1.2553
1065.8	1014.6	737.3	720.2	684.1	647.7
0.0000	1.0000	3.196	3.336	3.642	3.971

PERFORMANCE PARAMETERS

AE/AT	1.0000	8.3000	10.0000	15.0000	23.0000
CSTAR, FT/SEC	4886	4886	4886	4886	4886
CF	0.681	1.582	1.613	1.673	1.723
IVAC, LB-SEC/LB	188.8	259.3	262.7	269.4	275.3
ISP, LB-SEC/LB	103.5	240.3	245.0	254.1	262.3

MOLE FRACTIONS

FORMALDEHYDE	0.00000	FORMIC ACID	0.00001	CO	0.29422
CO2	0.21772	CL	0.00037	CLO	0.00000
HCN	0.00000	HCO RAD	0.00002	HCL	0.00000
HNO	0.00000	HCCL	0.00000	H2O	0.00632
H2O	0.27100	H2O2	0.00000	K	0.00001
KN	0.00003	KO	0.00000	KCL	0.00084
N	0.00000	NH	0.00004	K2ELZ	0.00569
NO	0.00122	NO2	0.00000	MH3	0.00004
O	0.00024	OH	0.00000	M2O	0.00001
			0.00636		0.00000

ADDITIONAL PRODUCTS WHICH WERE CONSIDERED BUT WHOSE MOLE FRACTIONS WERE LESS THAN 0.50000E-06 FOR ALL ASSIGNED CONDITIONS

C	CMCL	CCL2	CCL3	CM	CMCL
CM4	CM2CL2	CM	CM3	HYDROXYMETHYLENE	METHYLOXIDE
C2H3 RAD	CM	CM3	MCN RAD	COCL2	C2
(FORMIC ACID)	C2CL6	CM2 RAD	CM2 RAD	ACETYLENE	KETENE
ALLENE	CM3CO RAD	ETHYL OXIDE RAD	ETHANE	ACETALDEHYDE	ACETIC ACID
PROPANE	CCO RAD	C3	PROPYLENE	DIMETHYL ETHER	ETHANOL
1-PROPANOL	C3H5 RAD	CYCLOPROPANE	PROPYLENE	CYCLOPROPENE	PROPENE
1,3-BUTADIENE	2-BUTYNE	CARBON SUBOXIDE	CA	1-PROPYL RAD	M-PROPYL RAD
1-BUTYL RAD	5-BUTYL RAD	2-BUTENE TRANS	2-BUTENE CIS	1-CYCLOBUTADIENE	BUTAN-1,2-DIOL
		N-BUTYL RAD	M-BUTANE	1-BUTENE	(ACETIC ACID)2
				CARBON SUBMITRID	C5

CYCLOPENTADIENE	CYCLOPENTANE	1-PENTENE	1-PENTYL RAD	N-PENTYL RAD	PENTANE	ISOPENTANE
CASEICHS)ZCH3	HEXATRIENE	PHENYL RAD	PHENDIY RAD	BENZENE	PHENOL	CYCLOHEXENE
N-HEXYL RAD	TOLUENE	CREOSOL	1-HEPTENE	N-HEPTYL RAD	N-HEPTANE	1-OCTENE
N-OCTYL RAD	OCTANE	ISO-OCTANE	N-NONYL RAD	NAPHTHLENE	N-DECYL RAD	N-DECYL RAD
O-BIPHENYL RAD	BIPHENYL	JET-A(G)	CLCN	CLDZ	CLZD	CLZD
MMOZ	MMOJ	MZM2	KCM	KZ	KZDZM2	KZDZM2
MCO	MMZOM	MOCCL	MOZCL	MO3	MMZM2	MMZM2
MZHA	MZD3	MZDA	MZD5	M3	M3H	O3
C(GR)	BENZENE(L)	TOLUENE(L)	OCTANE(L)	JET-A(L)	MZD(L)	MZD(L)
K(S)	K(L)	KCM(S)	KCM(L)	KCL(S)	KCL(L)	KOH(A)
KOH(B)	KH(L)	KOZ(S)	KZCO3(S)	KZCO3(L)	KZD(L)	KOH(A)
MMaCL(A)	MMaCL(B)				KZD(S)	KZD(S)

NOTE. WEIGHT FRACTION OF FUEL IN TOTAL FUELS AND OF OXIDANT IN TOTAL OXIDANTS

Table C-3
NASA - Lewis CET - 86
Output
Composition L

SINGULAR MATRIX, ITERATION 3 VARIABLE 8
SINGULAR MATRIX, ITERATION 4 VARIABLE 10
WARNING--POINT 1 USES A REDUCED SET OF COMPONENTS AND NO SPECIES USING THE ELIMINATED COMPONENT ARE CALCULATED.
IF QUESTIONABLE, RERUN WITH INSERTED CONDENSED SPECIES CONTAINING COMPONENT CD

POINT	ITM	T	M3M	03	DM	MOZCL	MCO	MALO	BA02M2
CRD3			CUC3L3						
1	25	2647.56	-46.597	-55.490	-27.117	-69.071	-42.849	-43.687	-88.721
ADD	ALZ03(L)		-94.458						
1	5	2679.09	-46.687	-55.233	-27.054	-68.787	-42.847	-49.375	-88.674
ADD	CRZ03(L)		-94.749						
1	4	2694.85	-46.726	-55.074	-27.010	-68.678	-42.846	-49.247	-88.515
			-67.439						

SINGULAR MATRIX, ITERATION 1 VARIABLE 10
SINGULAR MATRIX, ITERATION 2 VARIABLE 10
SINGULAR MATRIX, ITERATION 3 VARIABLE 10
SINGULAR MATRIX, ITERATION 4 VARIABLE 10
WARNING--POINT 2 USES A REDUCED SET OF COMPONENTS AND NO SPECIES USING THE ELIMINATED COMPONENT ARE CALCULATED.
IF QUESTIONABLE, RERUN WITH INSERTED CONDENSED SPECIES CONTAINING COMPONENT CD

POINT	ITM	T	M2	CO2	M2O	MCL	CO	ALZ03(L)	BACLZ
CRZ03(L)			CUC1						
2	10	2456.97	-25.394	-50.300	-36.906	-28.573	-30.906	-105.521	-75.347
			-83.195						
PHASE	CHANGE	REPLACE	CRZ03(L)		WITH	CRZ03(S)			
2	2	2439.07	-25.399	-50.289	-36.900	-28.572	-30.904	-105.466	-75.331
			-83.563						
PC/PT		1.780411	T = 2439.07						

SINGULAR MATRIX, ITERATION 1 VARIABLE 10
SINGULAR MATRIX, ITERATION 2 VARIABLE 10
SINGULAR MATRIX, ITERATION 3 VARIABLE 10
SINGULAR MATRIX, ITERATION 4 VARIABLE 10
WARNING--POINT 2 USES A REDUCED SET OF COMPONENTS AND NO SPECIES USING THE ELIMINATED COMPONENT ARE CALCULATED.
IF QUESTIONABLE, RERUN WITH INSERTED CONDENSED SPECIES CONTAINING COMPONENT CD

POINT	ITM	T	M2	CO2	M2O	MCL	CO	ALZ03(L)	BACLZ
CRZ03(S)			CUC1						
2	9	2437.05	-25.601	-50.305	-36.911	-28.578	-30.911	-105.519	-75.351
			-83.598						
PC/PT		1.788686	T = 2437.05						

SINGULAR MATRIX, ITERATION 1 VARIABLE 10
SINGULAR MATRIX, ITERATION 2 VARIABLE 10
SINGULAR MATRIX, ITERATION 3 VARIABLE 10
SINGULAR MATRIX, ITERATION 4 VARIABLE 10
WARNING--POINT 2 USES A REDUCED SET OF COMPONENTS AND NO SPECIES USING THE ELIMINATED COMPONENT ARE CALCULATED.
IF QUESTIONABLE, RERUN WITH INSERTED CONDENSED SPECIES CONTAINING COMPONENT CD

POINT	ITM	T	M2	CO2	M2O	MCL	CO	ALZ03(L)	BACLZ
CRZ03(S)			CUC1						
2	9	2437.04	-25.601	-50.305	-36.911	-28.578	-30.911	-105.519	-75.351
			-83.598						
PC/PT		1.788686	T = 2437.05						

```

-83.999          -31.358
PC/PI= 1.788749  T = 2437.04
SINGULAR MATRIX, ITERATION 1 VARIABLE 10
SINGULAR MATRIX, ITERATION 2 VARIABLE 10
SINGULAR MATRIX, ITERATION 3 VARIABLE 10
SINGULAR MATRIX, ITERATION 4 VARIABLE 10
WARNING--POINT 3 USES A REDUCED SET OF COMPONENTS AND NO SPECIES USING THE ELIMINATED COMPONENT ARE CALCULATED.
IF QUESTIONABLE, RERUN WITH INSERTED CONDENSED SPECIES CONTAINING COMPONENT CD
3 13 1284.82 -26.929 -67.251 -48.526 -37.390 -168.494 -97.138
-125.767 -31.018
PHASE CHANGE, REPLACE AL2O3(L) WITH AL2O3(A)
3 2 1286.64 -26.933 -67.207 -48.498 -34.023 -37.378 -171.472 -97.080
-125.633 -31.022
ADD BAELZ(L)
3 4 1289.42 -26.939 -67.139 -48.456 -34.010 -37.360 -171.158 -101.847
-125.429 -31.005

```

```

SINGULAR MATRIX, ITERATION 1 VARIABLE 10
SINGULAR MATRIX, ITERATION 2 VARIABLE 10
SINGULAR MATRIX, ITERATION 3 VARIABLE 10
SINGULAR MATRIX, ITERATION 4 VARIABLE 10
WARNING--POINT 3 USES A REDUCED SET OF COMPONENTS AND NO SPECIES USING THE ELIMINATED COMPONENT ARE CALCULATED.
IF QUESTIONABLE, RERUN WITH INSERTED CONDENSED SPECIES CONTAINING COMPONENT CD
POINT ITM 1 MZ CO2 M20 MCL CO AL2O3(A) BAELZ(L)
CR2O3(S) CUJCL3 -67.371 -48.613 -34.080 -37.446 -172.090 -102.283
3 11 1281.21 -26.953 -67.371 -48.613 -34.080 -37.446 -172.090 -102.283
-126.035 -93.118

```

```

SINGULAR MATRIX, ITERATION 1 VARIABLE 10
SINGULAR MATRIX, ITERATION 2 VARIABLE 10
SINGULAR MATRIX, ITERATION 3 VARIABLE 10
SINGULAR MATRIX, ITERATION 4 VARIABLE 10
WARNING--POINT 3 USES A REDUCED SET OF COMPONENTS AND NO SPECIES USING THE ELIMINATED COMPONENT ARE CALCULATED.
IF QUESTIONABLE, RERUN WITH INSERTED CONDENSED SPECIES CONTAINING COMPONENT CD
3 11 1281.26 -26.953 -67.370 -48.613 -34.080 -37.445 -172.085 -102.281
-126.032 -93.118

```

```

SINGULAR MATRIX, ITERATION 1 VARIABLE 10
SINGULAR MATRIX, ITERATION 2 VARIABLE 10
SINGULAR MATRIX, ITERATION 3 VARIABLE 10
SINGULAR MATRIX, ITERATION 4 VARIABLE 10
WARNING--POINT 4 USES A REDUCED SET OF COMPONENTS AND NO SPECIES USING THE ELIMINATED COMPONENT ARE CALCULATED.
IF QUESTIONABLE, RERUN WITH INSERTED CONDENSED SPECIES CONTAINING COMPONENT CD
4 11 1173.50 -27.159 -70.729 -50.891 -35.087 -38.884 -185.610 -108.712
-134.835 -94.710
PHASE CHANGE, REPLACE BAELZ(L) WITH BAELZ(B)
4 2 1173.68 -27.159 -70.724 -50.888 -35.086 -38.882 -185.586 -108.785
-134.819 -94.707

```



```

ADD BACL2(A)
  3 1197.99 -27.217 -70.018 -34.950 -38.490 -182.712 -107.189
  -132.684 -94.420
REMOVE BACL2(B)
  4 2 1173.85 -27.160 -70.719 -35.085 -38.681 -185.562 -108.807
  -134.804 -94.705
ADD CU(S)
  4 3 1173.89 -27.160 -70.718 -35.084 -38.681 -185.557 -108.805
  -134.800 -94.802

```

```

SINGULAR MATRIX, ITERATION 1 VARIABLE 10
SINGULAR MATRIX, ITERATION 2 VARIABLE 10
SINGULAR MATRIX, ITERATION 3 VARIABLE 10
SINGULAR MATRIX, ITERATION 4 VARIABLE 10

```

WARNING--POINT 4 USES A REDUCED SET OF COMPONENTS AND NO SPECIES USING THE ELIMINATED COMPONENT ARE CALCULATED.
IF QUESTIONABLE, RERUN WITH INSERTED CONDENSED SPECIES CONTAINING COMPONENT CD

```

POINT ITM T M2 MZ CO2 MCL MCO ALZ03(A) BACL2(A)
  4 11 1175.36 -27.137 -70.668 -50.850 -35.069 -38.662 -185.355 -108.704
  -134.668 -94.770

```

```

SINGULAR MATRIX, ITERATION 1 VARIABLE 10
SINGULAR MATRIX, ITERATION 2 VARIABLE 10
SINGULAR MATRIX, ITERATION 3 VARIABLE 10
SINGULAR MATRIX, ITERATION 4 VARIABLE 10

```

WARNING--POINT 5 USES A REDUCED SET OF COMPONENTS AND NO SPECIES USING THE ELIMINATED COMPONENT ARE CALCULATED.
IF QUESTIONABLE, RERUN WITH INSERTED CONDENSED SPECIES CONTAINING COMPONENT CD

```

  5 11 1059.09 -27.419 -75.074 -53.832 -36.371 -40.288 -203.141 -117.586
  -146.302 -97.650

```

```

SINGULAR MATRIX, ITERATION 1 VARIABLE 10
SINGULAR MATRIX, ITERATION 2 VARIABLE 10
SINGULAR MATRIX, ITERATION 3 VARIABLE 10
SINGULAR MATRIX, ITERATION 4 VARIABLE 10

```

WARNING--POINT 5 USES A REDUCED SET OF COMPONENTS AND NO SPECIES USING THE ELIMINATED COMPONENT ARE CALCULATED.
IF QUESTIONABLE, RERUN WITH INSERTED CONDENSED SPECIES CONTAINING COMPONENT CD

```

POINT ITM T M2 MZ CO2 MCL MCO ALZ03(A) BACL2(A)
  5 10 1059.29 -27.418 -75.066 -53.826 -36.368 -40.284 -203.107 -117.569
  -146.280 -95.695

```

```

SINGULAR MATRIX, ITERATION 1 VARIABLE 10
SINGULAR MATRIX, ITERATION 2 VARIABLE 10
SINGULAR MATRIX, ITERATION 3 VARIABLE 10
SINGULAR MATRIX, ITERATION 4 VARIABLE 10

```

WARNING--POINT 6 USES A REDUCED SET OF COMPONENTS AND NO SPECIES USING THE ELIMINATED COMPONENT ARE CALCULATED.
IF QUESTIONABLE, RERUN WITH INSERTED CONDENSED SPECIES CONTAINING COMPONENT CD

```

  6 11 985.87 -27.615 -78.405 -56.080 -37.547 -41.521 -216.593 -124.327
  -146.302 -97.650

```

```

-155.137          -5.532
SINGULAR MATRIX, ITERATION 1 VARIABLE 10
SINGULAR MATRIX, ITERATION 2 VARIABLE 10
SINGULAR MATRIX, ITERATION 3 VARIABLE 10
SINGULAR MATRIX, ITERATION 4 VARIABLE 10
WARNING--POINT 6 USES A REDUCED SET OF COMPONENTS AND NO SPECIES USING THE ELIMINATED COMPONENT ARE CALCULATED.
IF QUESTIONABLE, RETURN WITH INSERTED CONDENSED SPECIES CONTAINING COMPONENT C0
POINT ITH  F      NZ      CU(S)      C02      MCL      CO      AL2O3(A)      BAEL2(A)
6  11  986.46  -27.613  -78.376  -19.193  -37.339  -41.510  -216.477  -174.268
-155.061          -5.533

```

THEORETICAL ROCKET PERFORMANCE ASSUMING EQUILIBRIUM COMPOSITION DURING EXPANSION

PC = 2300.0 PSIA
CASE NO. 208

CHEMICAL FORMULA
 FUEL M 1.00000 O 4.00000 H 4.00000 CL 1.00000
 FUEL C 2.00000 CL 1.00000 M 3.00000
 FUEL C 22.00000 O 4.00000 H 42.00000
 FUEL AL 1.00000
 FUEL BA 1.00000 CD 1.00000
 FUEL CU 2.00000 CR 2.00000 O 4.00000

O/F = 0.0000 PERCENT FUEL = 100.0000 EQUIVALENCE RATIO = 1.4412 PMI = 0.0000

CHAMBER	THROAT	EXIT	EXIT	EXIT	EXIT	WT FRACTION (SEE NOTE)	ENERGY CAL/MOL	STATE	TEMP DEC K
1.0000	1.7887	55.782	87.422	150.74	220.58	0.741153	-70580.000	S	298.15
170.11	95.102	5.0496	1.9459	1.1284	0.77121	0.116992	8408.000	S	298.15
2694.9	2837.0	1281.5	1175.4	1059.3	986.5	0.000501	-308000.000	S	0.00
1.7161-2	1.1860-2	7.2512-4	5.0439-4	3.2454-4	2.3824-4	0.009225	0.000		0.00
-526.74	-645.66	-1140.46	-1184.30	-1232.65	-1243.57	0.004712	0.000		0.00
-741.74	-839.85	-1242.31	-1277.75	-1316.85	-1341.97	0.009724	0.000		0.00
-6648.58	-6199.75	-4060.48	-3862.48	-3646.79	-3511.74				
2.2790	2.2790	2.2790	2.2790	2.2790	2.2790				

PERFORMANCE PARAMETERS

AE/AT 1.0000 7.2000 10.000 15.000 20.000 25.000
 CE/AT 4780 4780 4780 4780 4780 4780
 CF 0.685 1.556 1.610 1.668 1.704
 IYAC-LB-SEC/LB 184.8 250.3 256.2 262.6 266.7
 ISP-LB-SEC/LB 101.7 231.1 239.2 247.8 255.2

MOLE FRACTIONS

ALCL 1.454 -5 3.060 -6 1.607-14 3.486-16 2.068-18 4.354-20
 ALCL2 5.648 -5 1.641 -5 4.802-12 2.494-13 4.862-15 2.523-16
 ALCL3 1.929 -4 8.355 -3 2.942 -8 6.694 -9 9.624-10 2.268-10
 ALOCL 2.951 -5 7.015 -6 1.288-13 3.622-15 3.065-17 8.457-19
 ALOM 1.525 -6 2.797 -7 8.480-16 7.779-18 3.419-20 5.730-22
 ALO2H 1.217 -6 2.367 -6 6.691-15 1.311-16 6.828-19 1.309-20
 BAOL2 4.629-4 4.675-4 3.1754-6 3.4871-7 1.3434-8 1.1163-9
 BAOL2H 1.001 -6 3.755 -7 3.472-13 7.245-15 3.091-17 4.991-19
 CD 2.659-6 1.5480-6 8.2519-8 5.7407-8 3.6581-8 2.6372-8
 CDH 3.9155-6 2.1387-6 7.6453-8 5.1143-8 3.1456-8 2.2358-8
 CH4 8.0207-8 7.4226-8 3.6586-6 1.1657-5 5.0285-5 1.9961-4
 CO 1.9815-1 1.9472-1 1.4681-1 1.3536-1 1.1945-1 1.0732-1
 COCL 8.048 -6 2.934 -6 3.300-10 1.122-10 1.458-11 3.182-12
 CO2 6.7727-2 7.1474-2 1.9988-1 1.3129-1 1.4697-1 1.5895-1
 CL 1.576 -3 7.275 -4 1.817 -7 3.442 -8 3.735 -9 7.041-10
 CL0 5.204 -7 7.967 -8 5.227-16 1.321-17 9.932-20 2.551-21
 CL2 1.529 -5 6.028 -6 9.322-10 1.771-10 1.982-11 3.874-12
 CN 1.713 -5 2.642 -6 1.926-15 2.683-17 8.583-20 1.118-21

CR0	4.624	-5	3.870	-6	4.896	-16	4.454	-18	8.119	-21	6.946	-23
CR02	3.226	-5	4.133	-6	3.651	-16	3.370	-18	6.300	-21	5.319	-23
CU	9.374	-5	4.183	-6	2.849	-8	3.132	-9	1.300	-10	1.145	-11
CUCL	1.538	-3	1.572	-3	1.059	-4	3.087	-5	5.463	-6	1.477	-11
CUCL3	8.533	-8	2.719	-7	5.106	-4	4.887	-4	2.462	-4	1.701	-4
H	1.567	-3	7.207	-4	2.014	-7	3.921	-8	4.385	-9	8.438	-10
HCM	2.671	-6	1.533	-6	7.567	-8	5.214	-8	3.281	-8	2.438	-8
HCO RAD	5.766	-6	2.082	-6	3.761	-10	7.928	-11	1.013	-11	2.173	-12
HCL	1.979	-1	1.993	-1	2.007	-1	2.008	-1	2.013	-1	2.016	-1
HCL3	9.121	-7	4.724	-7	8.263	-9	4.678	-9	2.764	-9	1.348	-9
H2	3.609	-6	9.894	-7	4.315	-12	4.124	-13	1.845	-14	1.815	-15
H2O	1.367	-1	1.402	-1	1.884	-1	2.001	-1	2.169	-1	2.265	-1
H2O2	3.094	-1	3.065	-1	2.590	-1	2.478	-1	2.316	-1	2.198	-1
H3	1.002	-6	3.189	-7	2.033	-11	3.602	-12	3.999	-13	6.808	-14
H3O	2.191	-5	1.632	-5	1.159	-6	1.073	-6	1.294	-7	1.518	-7
H4	7.813	-2	7.827	-2	7.831	-2	7.835	-2	7.839	-2	7.843	-2
O	6.644	-6	1.039	-6	3.428	-15	6.904	-17	3.735	-19	7.401	-21
OH	9.240	-4	3.098	-6	3.422	-9	3.512	-10	1.675	-11	1.700	-12
AL2O3(A)	0.000	0	0.000	0	2.316	-15	4.364	-17	2.161	-19	4.017	-21
AL2O3(L)	4.423	-3	4.268	-3	0.000	0	4.570	-3	4.567	-3	4.566	-3
BACL2(A)	0.000	0	0.000	0	0.000	0	0.000	0	0.000	0	0.000	0
BACL2(B)	0.000	0	0.000	0	0.000	0	0.000	0	0.000	0	0.000	0
CR2O3(S)	0.000	0	0.000	0	4.657	-4	0.000	0	4.684	-4	4.684	-4
CR2O3(L)	7.686	-4	0.000	0	0.000	0	8.190	-4	8.189	-4	8.183	-4
CU(S)	0.000	0	0.000	0	0.000	0	0.000	0	0.000	0	0.000	0
AL	ALC	ALM	ALM	ALM	ALM	ALM	ALM	ALM	ALM	ALM	ALM	ALM
ALZL6	ALZ0	ALZ02	ALZ03	ALZ04	ALZ05	ALZ06	ALZ07	ALZ08	ALZ09	ALZ10	ALZ11	ALZ12
CCL	CCL2	CCL3	CCL4	CCL5	CCL6	CCL7	CCL8	CCL9	CCL10	CCL11	CCL12	CCL13
ENZ	ENZL2	ENZL3	ENZL4	ENZL5	ENZL6	ENZL7	ENZL8	ENZL9	ENZL10	ENZL11	ENZL12	ENZL13
CM	CM3	CM4	CM5	CM6	CM7	CM8	CM9	CM10	CM11	CM12	CM13	CM14
CMZL6	CMZL7	CMZL8	CMZL9	CMZL10	CMZL11	CMZL12	CMZL13	CMZL14	CMZL15	CMZL16	CMZL17	CMZL18
ETHYL OXIDE RAD	ETHANE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE
CCO RAD	ETHANE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE
CYCLOPROPANE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE
CARBON SUBOXIDE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE
2-BUTENE TRANS	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE
1-PENTENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE
PHENYL RAD	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE
CRESOL	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE
150-OCTANE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE
JET-A(G)	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE
CUZ	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE
H2O2	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE
M02EL	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE
M204	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE
ALCL3(S)	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE
BACL2(B)	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE
TOLUENE(L)	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE
CU(L)	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE
MWACL(B)	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE	ETHYLENE
ALD	ALD2	ALD3	ALD4	ALD5	ALD6	ALD7	ALD8	ALD9	ALD10	ALD11	ALD12	ALD13
BAO	BAO2	BAO3	BAO4	BAO5	BAO6	BAO7	BAO8	BAO9	BAO10	BAO11	BAO12	BAO13
CM	CM2	CM3	CM4	CM5	CM6	CM7	CM8	CM9	CM10	CM11	CM12	CM13
HYDROXYMETHYLENE	HYDROXYMETHYLENE	HYDROXYMETHYLENE	HYDROXYMETHYLENE	HYDROXYMETHYLENE	HYDROXYMETHYLENE	HYDROXYMETHYLENE	HYDROXYMETHYLENE	HYDROXYMETHYLENE	HYDROXYMETHYLENE	HYDROXYMETHYLENE	HYDROXYMETHYLENE	HYDROXYMETHYLENE
ACETIC ACID	ACETIC ACID	ACETIC ACID	ACETIC ACID	ACETIC ACID	ACETIC ACID	ACETIC ACID	ACETIC ACID	ACETIC ACID	ACETIC ACID	ACETIC ACID	ACETIC ACID	ACETIC ACID
ETHANOL	ETHANOL	ETHANOL	ETHANOL	ETHANOL	ETHANOL	ETHANOL	ETHANOL	ETHANOL	ETHANOL	ETHANOL	ETHANOL	ETHANOL
M-PROPYL RAD	M-PROPYL RAD	M-PROPYL RAD	M-PROPYL RAD	M-PROPYL RAD	M-PROPYL RAD	M-PROPYL RAD	M-PROPYL RAD	M-PROPYL RAD	M-PROPYL RAD	M-PROPYL RAD	M-PROPYL RAD	M-PROPYL RAD
BUTAN-1EN-3YN	BUTAN-1EN-3YN	BUTAN-1EN-3YN	BUTAN-1EN-3YN	BUTAN-1EN-3YN	BUTAN-1EN-3YN	BUTAN-1EN-3YN	BUTAN-1EN-3YN	BUTAN-1EN-3YN	BUTAN-1EN-3YN	BUTAN-1EN-3YN	BUTAN-1EN-3YN	BUTAN-1EN-3YN
(ACETIC ACID)2	(ACETIC ACID)2	(ACETIC ACID)2	(ACETIC ACID)2	(ACETIC ACID)2	(ACETIC ACID)2	(ACETIC ACID)2	(ACETIC ACID)2	(ACETIC ACID)2	(ACETIC ACID)2	(ACETIC ACID)2	(ACETIC ACID)2	(ACETIC ACID)2
ISOPENTANE	ISOPENTANE	ISOPENTANE	ISOPENTANE	ISOPENTANE	ISOPENTANE	ISOPENTANE	ISOPENTANE	ISOPENTANE	ISOPENTANE	ISOPENTANE	ISOPENTANE	ISOPENTANE
CYCLOPENTADIENE	CYCLOPENTADIENE	CYCLOPENTADIENE	CYCLOPENTADIENE	CYCLOPENTADIENE	CYCLOPENTADIENE	CYCLOPENTADIENE	CYCLOPENTADIENE	CYCLOPENTADIENE	CYCLOPENTADIENE	CYCLOPENTADIENE	CYCLOPENTADIENE	CYCLOPENTADIENE
M-HEXYL RAD	M-HEXYL RAD	M-HEXYL RAD	M-HEXYL RAD	M-HEXYL RAD	M-HEXYL RAD	M-HEXYL RAD	M-HEXYL RAD	M-HEXYL RAD	M-HEXYL RAD	M-HEXYL RAD	M-HEXYL RAD	M-HEXYL RAD
1-OCTENE	1-OCTENE	1-OCTENE	1-OCTENE	1-OCTENE	1-OCTENE	1-OCTENE	1-OCTENE	1-OCTENE	1-OCTENE	1-OCTENE	1-OCTENE	1-OCTENE
M-DECYL RAD	M-DECYL RAD	M-DECYL RAD	M-DECYL RAD	M-DECYL RAD	M-DECYL RAD	M-DECYL RAD	M-DECYL RAD	M-DECYL RAD	M-DECYL RAD	M-DECYL RAD	M-DECYL RAD	M-DECYL RAD
CRN	CRN2	CRN3	CRN4	CRN5	CRN6	CRN7	CRN8	CRN9	CRN10	CRN11	CRN12	CRN13
MM03	MM04	MM05	MM06	MM07	MM08	MM09	MM10	MM11	MM12	MM13	MM14	MM15
MMZ0H	MMZ0H2	MMZ0H3	MMZ0H4	MMZ0H5	MMZ0H6	MMZ0H7	MMZ0H8	MMZ0H9	MMZ0H10	MMZ0H11	MMZ0H12	MMZ0H13
M2H4	M2H5	M2H6	M2H7	M2H8	M2H9	M2H10	M2H11	M2H12	M2H13	M2H14	M2H15	M2H16
BA(B)	BA(C)	BA(D)	BA(E)	BA(F)	BA(G)	BA(H)	BA(I)	BA(J)	BA(K)	BA(L)	BA(M)	BA(N)
BAD2H(S)	BAD2H(L)	BAD2H(M)	BAD2H(N)	BAD2H(O)	BAD2H(P)	BAD2H(Q)	BAD2H(R)	BAD2H(S)	BAD2H(T)	BAD2H(U)	BAD2H(V)	BAD2H(W)
CR(S)	CR(L)	CR(M)	CR(N)	CR(O)	CR(P)	CR(Q)	CR(R)	CR(S)	CR(T)	CR(U)	CR(V)	CR(W)
CUZ0(S)	CUZ0(L)	CUZ0(M)	CUZ0(N)	CUZ0(O)	CUZ0(P)	CUZ0(Q)	CUZ0(R)	CUZ0(S)	CUZ0(T)	CUZ0(U)	CUZ0(V)	CUZ0(W)
MWACL(B)	MWACL(L)	MWACL(M)	MWACL(N)	MWACL(O)	MWACL(P)	MWACL(Q)	MWACL(R)	MWACL(S)	MWACL(T)	MWACL(U)	MWACL(V)	MWACL(W)

ADDITIONAL PRODUCTS WHICH WERE CONSIDERED BUT WHOSE MOLE FRACTIONS WERE LESS THAN 0.5000E-06 FOR ALL ASSIGNED CONDITIONS

NOTE: WEIGHT FRACTION OF FUEL IN TOTAL FUELS AND OF OXIDANT IN TOTAL OXIDANTS

THEORETICAL ROCKET PERFORMANCE ASSUMING FROZEN COMPOSITION DURING EXPANSION

PC = 2500.0 PSIA
CASE NO. 208

CHEMICAL FORMULA
 FUEL M 1.00000 O 4.00000 H 4.00000 CL 1.00000
 FUEL C 2.00000 CL 1.00000 M 3.00000
 FUEL C 72.00000 O 4.00000 M 42.00000
 FUEL AL 1.00000
 FUEL BA 1.00000 CD 1.00000
 FUEL CU 2.00000 CR 2.00000 O 4.00000

O/F = 0.0000 PERCENT FUEL = 100.0000 EQUIVALENCE RATIO = 1.4412 PMI = 0.0000

WT FRACTION (SEE NOTE) ENERGY CAL/MOL STATE TEMP DEG K
 0.741153 -70580.000 S 298.15
 0.116992 8408.000 S 298.15
 0.116992 -308000.000 S 298.15
 0.000501 0.000
 0.009925 0.000
 0.004712 0.000
 0.009724 0.000

CHAMBER THROAT

PC/P 1.0000
 P. ATM 170.11
 T. DEG K 2494.19
 RHO. G/CC 1.91612
 M. CAL/G -526.74
 U. CAL/G -741.74
 S. CAL/G -668.38
 Z. 2.2790
 M. MOL WT 24.907
 CP. CAL/(G)(K) 0.4227
 GAMMA (S) 1.2326
 SOM VEL./SEC 1053.0
 MACH NUMBER 0.000

PERFORMANCE PARAMETERS

AE/AT
 CSTAR, FT/SEC
 CP
 IYAC. LB-SEC/LB
 ISP. LB-SEC/LB

MOLE FRACTIONS

ALCL 0.00001
 ALDH 0.00000
 FORMALDEHYDE 0.00000
 CO2 0.06773
 CR 0.00002
 CUCL 0.00154
 HCL 0.19798
 H2O 0.30941
 M2 0.07811
 ALZ03(L) 0.00442

ALCL2 0.00006
 ALD2M 0.00001
 FORMALIC ACID 0.00000
 CL 0.00138
 CRO 0.00005
 H 0.00154
 H2CO 0.00137
 MH2 0.00000
 O 0.00000
 CR203(L) 0.00077

ALCL3 0.00015
 BA2L2 0.00047
 CO 0.19815
 COCL 0.00001
 CL2 0.00002
 CU 0.00009
 H2O RAD 0.00001
 M2 0.13676
 MO 0.00005
 OZ 0.00001

ADDITIONAL PRODUCTS WHICH WERE CONSIDERED BUT WHOSE MOLE FRACTIONS WERE LESS THAN 0.5000E-06 FOR ALL ASSIGNED CONDITIONS

AL ALH ALZ0 ALZ
 AL2CL6 ALZD ALZ02 ALZ
 CCL CCL2 CCL3 CCL4
 CH2 CNZCL2 CN CNM RAD
 METHANOL CN C2H RAD C2H2
 C2CL4 C2CL6 C2H2O RAD
 METHYL CYANIDE CH3CO RAD
 ETHYL RAD ETHYL OXIDE RAD ETHANE

ALD BA
 BA2L2 CH
 HYDROXYMETHYLENE
 COCL2 C2CL2
 ACETYLENE ACETALDEHYDE
 DIMETHYL ETHER

ALD2 BA2H
 BA2H CHCL
 METHYLOXIDE C2CL2
 ACETENE C2H3 RAD
 ACETIC ACID (FORMIC ACID)2
 ETHANOL C2H5 RAD

CYANOGEN	CCO RAD	C3H3 RAD	CYCLOPROPENE	PROPYNE	ALLENE
C3H5 RAD	CYCLOPROPANE	PROPYLENE OXIDE	1-PROPYL RAD	N-PROPYL RAD	PROPANE
1-PROPANOL	CARBON SUBOXIDE	BUTADIENE	CYCLOBUTADIENE	BUTAN-1EN-3YN	1,3-BUTADIENE
2-BUTYNE	2-BUTENE CIS	ISOBUTYME	1-BUTYL RAD	CACETIC ACID)2	1-BUTYL RAD
5-BUTYL RAD	N-BUTANE	ISOBUTANE	CARBON SUBNITRID	C3	CYCLOPENTADIENE
CYCLOPENTANE	1-PENTENE	N-PENTYL RAD	PROPANE	ISOPENTANE	CN3C(CH3)2CH3
HEXATRIYME	1-PENTYL RAD	BENZENE	PROPANOL	CYCLOHEXENE	N-HEXYL RAD
TOLUENE	PHENOXY RAD	N-HEPTYL RAD	N-HEPTANE	1-OCTENE	N-OCTYL RAD
OCTANE	1-HEPTENE	NAPHTHLENE	AZULENE	N-DECYL RAD	D-BIPHENYL RAD
BIPHENYL	ISO-OCTANE	CLDZ	CLZD	CRN	CRD3
CUO	JET-A(G)	CLCM	MALO	CRN	MNO3
M02	CU2	CU3CL3	M2O2	MNO2	MNO3
M02	M2M2	M2O2	M2O2	MM	MNZOH
M02	M2O2	M2O2	M2O2	MM	MZMA
M2O	M2O	M2O2	M2O2	MZOH	MZMA
AL(S)	AL(L)	AL(L)	AL(L)	M3H	O3
BA(B)	BA(C)	BA(L)	BA(L)	ALZ03(A)	BA(A)
BAQ(L)	BAQ(S)	BAQZ(L)	BAQZ(L)	BA(LZ(L))	BAQ(S)
JET-AL(L)	CR(S)	CR(L)	CR(S)	BA(LZ(L))	OCTANE(L)
CU(L)	CU(S)	CU(L)	CU(S)	CRZ03(S)	CU(S)
MMA(L)(A)	MMA(L)(B)	CUOZ(L)	CUOZ(L)	CRZ03(S)	MZ0(L)

NOTE. WEIGHT FRACTION OF FUEL IN TOTAL FUELS AND OF OXIDANT IN TOTAL OXIDANTS

CALCULATIONS WERE STOPPED BECAUSE NEXT POINT IS MORE THAN 50 DEG BELOW TEMP RANGE OF A CONDENSED SPECIES

Table C-4
NASA - Lewis CET - 86
Output

Composition Q


```

R-ACTANTS
C 3.0000 0 9.0000 M 3.0000 M 3.0000 0.0000 11.360000 -85300.00 5 298.150
C 4.0000 0 9.0000 M 7.0000 M 3.0000 0.0000 11.360000 -93070.00 5 298.150
C 8.0000 0 8.0000 M 8.0000 M 8.0000 0.0000 66.000000 12930.00 5 298.150
C 10.0000 0 3.0000 M 16.0000 M 0.0000 0.0000 4.830000 -282900.00 5 298.150
C 2.0000 0 1.0000 M 3.0000 M 1.0000 0.0000 1.680000 -22550.00 5 298.150
C 2.0000 0 2.0000 M 8.0000 M 2.0000 0.0000 0.750000 -14860.00 5 298.150
C 12.0000 0 2.0000 M 11.0000 M 2.0000 0.0000 0.400000 -653130.00 5 298.150
C 6.0000 0 7.0000 M 8.0000 M 0.0000 0.0000 0.340000 -160200.00 5 298.150
C 12.0000 0 70.0000 M 15.0000 M 5.0000 0.0000 1.000000 -48500.00 5 298.150
ZR 1.0000 C 1.0000 0 0.0000 0 17.0000 0.0000 0.0000 0.00 5 298.150
PB 3.0000 C 12.0000 M 16.0000 0 0.0000 0.0000 0.0000 0.00 5 298.150
C 1.0000 0 0.0000 0 0.0000 0.0000 0.0000 0.00 5 298.150
BI 1.0000 C 18.0000 M 15.0000 0.0000 0.0000 0.040000 0.00 5 298.150

```

```

NAMELISTS
$IMPTZ
RASE = 300.
T = 26*0.0000000E+00.
PSIA = 1480.000 . 25*0.0000000E+00.
MMHG = F.
NSOM = F.
V = 26*0.0000000E+00.
RHO = 1480.000 . 25*0.0000000E+00.
CRATIO = F.
OF = F.
FPCT = F.
FA = F.
MIX = 26*-1.000000
TP = F.
HP = F.
SP = F.
TV = F.
UV = F.
SV = F.
RKT = T.
SMOCK = F.
DETN = F.
TRACE = 5.000000000000000E-07.
SO = 0.000000000000000E+00.
SD = 0.0000000E+00.
IONS = F.
IDEBUG = 0.
PMI = F.
SIUNIT = F.
IMHG = F.
TRMSPT = F.
TRPACC = 0.9999000000000000
DIF = F.
MODATA = F.
U = 1.000000000000000E+30.
H = 1.000000000000000E+30
$END

```

```

NO IMPTZ VALUE GIVEN FOR OF, EORAT, FA, OR FPCT
SPECIES BEING CONSIDERED IN THIS SYSTEM
L 7/75 BI J 3/78 C
L 4/85 FORMIC ACID J 6/69 CH3
L 9/85 METHANOL J 6/69 CM
J 9/65 CD2 J12/69 C2
BUR 84 C2H3 RAD BUR 84 METHYL CYANIDE
BUR 84 ACETALDEHYDE L 4/85 ACETIC ACID
J12/67 CH J12/72 CM2
L 9/85 HYDROXYMETHYLENE L 9/85 METHYL OXIDE
J12/70 HCM RAD J 6/66 CMH RAD
J 3/67 C2M RAD J 3/61 ACETYLENE
BUR 84 CH3CO RAD BUR 84 CH2CHO RAD
L 4/85 (FORMIC ACID)2 L 4/85 ETHYL OXIDE RAD
BUR 84 ETENE BUR 84 ETENE
BUR 84 ETYLENE L 4/85 ETYLENE
BUR 84 ETYL OXIDE RAD BUR 84 ETYL OXIDE RAD

```


POINT	ITM	T	CO	M20	M2	M2	ZR02(L)	PB	BI
2	4	2664.85	-30.797	-37.224	-18.367	-25.271	-66.390	-18.457	-23.090
PHASE CHANGE, REPLACE ZR02(L)									
2	2	2668.58	-30.795	WITH ZR02(B)	-18.372	-25.276	-66.704	-18.473	-23.106
PC/PT= 1.781106 T = 2668.58									
POINT	ITM	T	CO	M20	M2	M2	ZR02(B)	PB	BI
2	3	2666.37	-30.801	-37.225	-18.374	-25.277	-66.738	-18.468	-23.101
PC/PT= 1.789253 T = 2666.37									
2	2	2666.35	-30.801	-37.226	-18.374	-25.277	-66.738	-18.468	-23.101
PC/PT= 1.789311 T = 2666.35									
3	6	1894.37	-33.484	-41.961	-18.908	-25.067	-84.178	-15.823	-20.350
3	4	1897.79	-33.448	-41.932	-18.906	-25.064	-84.067	-15.840	-20.349
4	5	1713.91	-34.399	-43.699	-19.056	-26.042	-90.737	-14.803	-19.240
4	3	1716.00	-34.387	-43.677	-19.054	-26.040	-90.653	-14.816	-19.254
5	5	1567.74	-35.307	-45.410	-19.187	-26.204	-97.236	-13.783	-18.147
5	3	1568.43	-35.302	-45.401	-19.186	-26.203	-97.203	-13.788	-18.153
6	5	1496.82	-35.810	-46.365	-19.256	-26.291	-100.876	-13.209	-17.552
6	3	1496.74	-35.811	-46.366	-19.256	-26.291	-100.880	-13.208	-17.551
7	5	1404.05	-36.544	-47.764	-19.352	-26.416	-106.224	-12.362	-16.624
PHASE CHANGE, REPLACE ZR02(B)									
7	2	1404.39	-36.542	WITH ZR02(A)	-19.353	-26.416	-106.229	-12.367	-16.629
POINT	ITM	T	CO	M20	M2	M2	ZR02(A)	PB	BI
7	3	1403.41	-36.533	-47.743	-19.352	-26.415	-106.166	-12.377	-16.640

THEORETICAL ROCKET PERFORMANCE ASSUMING EQUILIBRIUM COMPOSITION DURING EXPANSION

PC = 1480.0 PSIA
CASE NO. 300

CHEMICAL FORMULA		WT FRACTION (SEC NOTE)		ENERGY CAL/MOL		STATE		TEMP DEC K	
FUEL	C 3.00000	O 9.00000	H 5.00000	M 3.00000	-85300.000	S	298.15		
FUEL	C 4.00000	O 9.00000	M 7.00000	M 3.00000	-93070.000	S	298.15		
FUEL	C 4.00000	O 8.00000	M 8.00000	M 8.00000	-17930.000	S	298.15		
FUEL	C 10.00000	O 5.00000	M 16.00000	M 1.00000	-28290.000	S	298.15		
FUEL	C 2.00000	O 1.00000	M 3.00000	M 2.00000	-23550.000	S	298.15		
FUEL	C 7.00000	O 2.00000	M 8.00000	M 8.00000	-7460.000	S	298.15		
FUEL	C 12.00000	O 2.00000	M 11.00000	M 2.00000	-15400.000	S	298.15		
FUEL	C 6.00000	O 2.00000	M 8.00000	M 8.00000	-65130.000	S	298.15		
FUEL	H 1.00000	O 20.00000	M 15.00000	M 5.00000	-160200.000	S	298.15		
FUEL	H 3.00000	C 12.00000	M 16.00000	O 17.00000	-48300.000	S	298.15		
FUEL	C 1.00000	C 18.00000	M 15.00000	M 15.00000	0.000	S	298.15		
FUEL	B1 1.00000	C 18.00000	M 15.00000	M 15.00000	0.000	S	298.15		

D/F = 0.0000 PERCENT FUEL = 100.0000 EQUIVALENCE RATIO = 1.6706 PHI = 0.0000

CHAMBER	TRD/AT	EXIT	EXIT	EXIT	EXIT
PC/P	1.0000	1.7893	10.525	17.450	27.340
P. ATM	100.71	56.283	9.5688	5.7711	3.6836
T. DEG K	2951.3	2466.4	1897.8	1716.0	1568.4
M.O. G/CC	9.9299-3	6.1562-3	1.4750-3	9.8254-4	6.8615-4
M. CAL/G	-134.63	-270.51	-603.48	-679.16	-740.24
U. CAL/G	-380.24	-491.92	-760.80	-821.40	-891.92
G. CAL/G	-7337.61	-6759.94	-2222.37	-4855.60	-4812.66
S. CAL/(G)(K)	2.4338	2.4338	2.4338	2.4338	2.4338
M. MOL WT	23.879	23.932	23.972	23.973	23.973
(DLV/DLP)T	-1.00207	-1.00091	-1.00004	-1.00002	-1.00001
(DLV/DLP)P	1.0422	1.0200	1.0008	1.0003	1.0001
CP. CAL/(G)(K)	0.5036	0.4638	0.4187	0.4116	0.4118
GAMMA (S)	1.2154	1.2275	1.2488	1.2512	1.2524
SON VEL. M/SEC	1111.7	1046.4	906.6	825.9	806.3
MACH NUMBER	0.000	1.000	2.185	2.474	2.728

PERFORMANCE PARAMETERS

AE/AT	1.0000	2.2500	3.1300	4.2500	5.0000
CSTAR. FT/SEC	5100	5100	5100	5100	5100
IYAC. LB-SEC/LB	0.686	1.274	1.373	1.448	1.483
ISP. LB-SEC/LB	197.3	235.9	246.1	254.2	258.1
	108.7	202.0	217.7	229.6	235.1

MOLE FRACTIONS

BI	2.1643-5	2.1691-5	2.1728-5	2.1729-5	2.1729-5
FORMALDEHYDE	2.4359-6	1.4218-6	0.0280-7	2.0095-7	1.4140-7
FORMIC ACID	2.5759-6	1.4072-6	2.3114-7	1.4134-7	9.2326-8
CH4	2.7273-8	2.3208-8	5.4614-8	1.0481-7	2.2171-7
CO	3.2199-1	3.1977-1	3.0317-1	2.9586-1	2.8811-1
CO2	7.0786-2	7.4379-2	9.1166-2	9.8408-2	1.0424-1
H	4.8998-3	2.4483-3	9.8475-5	2.8437-5	8.2388-6
MCH	6.5825-6	3.7915-6	7.9879-7	5.3197-7	3.7672-7
MCO RAO	1.2894-5	4.9440-6	1.2688-7	3.2457-8	1.0759-8
MCO	1.6580-6	8.6723-7	1.1640-7	6.3160-8	3.8810-8
MHD	5.531-7	1.150-7	1.503-10	1.336-11	1.243-12
H2	1.3530-1	1.3712-1	1.5458-1	1.6193-1	1.6970-1
					1.7424-1

MZ0	2.1028-1	2.0926-1	1.9406-1	1.8673-1	1.7900-1	1.7486-1	1.6775-1							
M	5.022	-7	8.241	-8	3.076	-11	1.584	-12	8.428	-14	1.633	-14	1.573	-15
MH	2.055	-6	4.757	-7	1.031	-9	1.085	-10	1.188	-11	3.472	-12	6.033	-13
MH2	2.790	-6	9.504	-7	1.486	-8	3.493	-9	8.748	-10	4.008	-10	1.355	-10
MHS	1.8340-5	1.3390-5	7.2997-6	6.8513-6	6.948-6	6.8277-6	7.1017-6							
MMS	3.326	-4	9.640	-5	3.633	-7	4.307	-8	5.7801	-6	6.3627	-6	7.1017	-6
M2	2.5239-1	2.5307-1	2.5356-1	2.5357-1	2.5357-1	2.5357-1	2.5357-1							
0	5.657	-5	1.066	-5	4.837	-9	2.465	-10	1.262	-11	2.370	-12	2.162	-13
OH	2.5322-3	9.4698	-4	0.149	-5	1.810	-6	3.1787	-7	1.1941	-7	2.9381	-8	
O2	3.580	-5	6.632	-6	2.632	-9	1.873	-10	6.116	-12	1.106	-12	9.536	-14
PB	9.4619	-4	9.7666	-4	0.171	-3	1.0176	-3	1.0205	-3	1.0208	-3	1.0210	-3
PB0	7.0835	-5	4.2669	-5	3.9989	-6	6.103	-6	6.5349	-7	3.9442	-7	1.9191	-7
ZR02	9.407	-7	6.119	-8	2.769	-13	2.675	-15	2.253	-17	1.606	-18	3.577	-20
ZR02(A)	0.0000	0	0.0000	0	0.0000	0	0.0000	0	0.0000	0	0.0000	0	0.0000	0
ZR02(B)	0.0000	0	2.3128	-3	2.3168	-3	2.3169	-3	2.3169	-3	2.3169	-3	2.3169	-3
ZR02(L)	2.3068	-3	0.0000	0	0.0000	0	0.0000	0	0.0000	0	0.0000	0	0.0000	0

ADDITIONAL PRODUCTS WHICH WERE CONSIDERED BUT WHOSE MOLE FRACTIONS WERE LESS THAN 0.50000E-06 FOR ALL ASSIGNED CONDITIONS

C	CH	CH2	CH3	CMN RAD	CH3	CMN RAD	CH3	HYDROXYMETHYLENE	METHANOL
CN	NCM RAD	CH3	C2	CH3CO RAD	CM2CHO RAD	ETHYLENE	ACETALDEHYDE	KETENE	KETENE
C2H3 RAD	METHYL CYANIDE	ETHYL OXIDE RAD	ETHANE	ETHYL OXIDE RAD	ETHANE	ACETALDEHYDE	ACETIC ACID	ACETIC ACID	ACETIC ACID
CNC RAD	CYANIDE	CCO RAD	C3	CCO RAD	C3	DIMETHYL ETHER	ETHANOL	ETHANOL	ETHANOL
ALLENE	C3H4 RAD	CYCLOPROPANE	PROPYLENE	CYCLOPROPANE	PROPYLENE	CYCLOPROPENE	PROPYLENE	PROPYLENE	PROPYLENE
PROPANE	1-PROPANOL	CARBON SUBOXIDE	CA	CARBON SUBOXIDE	CA	PROPYLENE OXIDE	1-PROPYL RAD	N-PROPYL RAD	N-PROPYL RAD
1,3-BUTADIENE	2-BUTYL RAD	2-BUTENE TRANS	2-BUTENE CIS	2-BUTENE TRANS	2-BUTENE CIS	BUTADIENE	CYCLOBUTADIENE	BUTAN-1,2-DIOL	BUTAN-1,2-DIOL
1-BUTYL RAD	3-BUTYL RAD	N-BUTYL RAD	M-BUTANE	N-BUTYL RAD	M-BUTANE	ISOBUTENE	CARBON SUBNITRID	C5	C5
CYCLOPENTADIENE	TETRAHYDENE	1-PENTENE	T-PENTYL RAD	1-PENTENE	T-PENTYL RAD	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
C5C(CH3)2CH3	1-PENTYL RAD	1-PENTENE	M-PENTYL RAD	1-PENTYL RAD	M-PENTYL RAD	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
M-HEXYL RAD	TOLUENE	PHENYL RAD	1-HEPTYNE	PHENYL RAD	1-HEPTYNE	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
M-OCTYL RAD	OCTANE	CRESOL	ISO-OCTANE	CRESOL	ISO-OCTANE	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
0-8IPHENYL RAD	BIPHENYL	1,2-DIPHENYL RAD	1,2-DIPHENYL RAD	1,2-DIPHENYL RAD	1,2-DIPHENYL RAD	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
M20	M20	M20	M20	M20	M20	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
M24	M24	M24	M24	M24	M24	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
O3	O3	O3	O3	O3	O3	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
C(CB)	C(CB)	C(CB)	C(CB)	C(CB)	C(CB)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
PB(S)	PB(S)	PB(S)	PB(S)	PB(S)	PB(S)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(A)	ZR(A)	ZR(A)	ZR(A)	ZR(A)	ZR(A)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(B)	ZR(B)	ZR(B)	ZR(B)	ZR(B)	ZR(B)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(L)	ZR(L)	ZR(L)	ZR(L)	ZR(L)	ZR(L)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(S)	ZR(S)	ZR(S)	ZR(S)	ZR(S)	ZR(S)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(F)	ZR(F)	ZR(F)	ZR(F)	ZR(F)	ZR(F)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(G)	ZR(G)	ZR(G)	ZR(G)	ZR(G)	ZR(G)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(H)	ZR(H)	ZR(H)	ZR(H)	ZR(H)	ZR(H)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(I)	ZR(I)	ZR(I)	ZR(I)	ZR(I)	ZR(I)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(J)	ZR(J)	ZR(J)	ZR(J)	ZR(J)	ZR(J)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(K)	ZR(K)	ZR(K)	ZR(K)	ZR(K)	ZR(K)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(L)	ZR(L)	ZR(L)	ZR(L)	ZR(L)	ZR(L)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(M)	ZR(M)	ZR(M)	ZR(M)	ZR(M)	ZR(M)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(N)	ZR(N)	ZR(N)	ZR(N)	ZR(N)	ZR(N)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(O)	ZR(O)	ZR(O)	ZR(O)	ZR(O)	ZR(O)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(P)	ZR(P)	ZR(P)	ZR(P)	ZR(P)	ZR(P)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(Q)	ZR(Q)	ZR(Q)	ZR(Q)	ZR(Q)	ZR(Q)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(R)	ZR(R)	ZR(R)	ZR(R)	ZR(R)	ZR(R)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(S)	ZR(S)	ZR(S)	ZR(S)	ZR(S)	ZR(S)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(T)	ZR(T)	ZR(T)	ZR(T)	ZR(T)	ZR(T)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(U)	ZR(U)	ZR(U)	ZR(U)	ZR(U)	ZR(U)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(V)	ZR(V)	ZR(V)	ZR(V)	ZR(V)	ZR(V)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(W)	ZR(W)	ZR(W)	ZR(W)	ZR(W)	ZR(W)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(X)	ZR(X)	ZR(X)	ZR(X)	ZR(X)	ZR(X)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(Y)	ZR(Y)	ZR(Y)	ZR(Y)	ZR(Y)	ZR(Y)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(Z)	ZR(Z)	ZR(Z)	ZR(Z)	ZR(Z)	ZR(Z)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(AA)	ZR(AA)	ZR(AA)	ZR(AA)	ZR(AA)	ZR(AA)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(AB)	ZR(AB)	ZR(AB)	ZR(AB)	ZR(AB)	ZR(AB)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(AC)	ZR(AC)	ZR(AC)	ZR(AC)	ZR(AC)	ZR(AC)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(AD)	ZR(AD)	ZR(AD)	ZR(AD)	ZR(AD)	ZR(AD)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(AE)	ZR(AE)	ZR(AE)	ZR(AE)	ZR(AE)	ZR(AE)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(AF)	ZR(AF)	ZR(AF)	ZR(AF)	ZR(AF)	ZR(AF)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(AG)	ZR(AG)	ZR(AG)	ZR(AG)	ZR(AG)	ZR(AG)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(AH)	ZR(AH)	ZR(AH)	ZR(AH)	ZR(AH)	ZR(AH)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(AI)	ZR(AI)	ZR(AI)	ZR(AI)	ZR(AI)	ZR(AI)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(AJ)	ZR(AJ)	ZR(AJ)	ZR(AJ)	ZR(AJ)	ZR(AJ)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(AK)	ZR(AK)	ZR(AK)	ZR(AK)	ZR(AK)	ZR(AK)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(AL)	ZR(AL)	ZR(AL)	ZR(AL)	ZR(AL)	ZR(AL)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(AM)	ZR(AM)	ZR(AM)	ZR(AM)	ZR(AM)	ZR(AM)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(AN)	ZR(AN)	ZR(AN)	ZR(AN)	ZR(AN)	ZR(AN)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(AO)	ZR(AO)	ZR(AO)	ZR(AO)	ZR(AO)	ZR(AO)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(AP)	ZR(AP)	ZR(AP)	ZR(AP)	ZR(AP)	ZR(AP)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(AQ)	ZR(AQ)	ZR(AQ)	ZR(AQ)	ZR(AQ)	ZR(AQ)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(AR)	ZR(AR)	ZR(AR)	ZR(AR)	ZR(AR)	ZR(AR)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(AS)	ZR(AS)	ZR(AS)	ZR(AS)	ZR(AS)	ZR(AS)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(AT)	ZR(AT)	ZR(AT)	ZR(AT)	ZR(AT)	ZR(AT)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(AU)	ZR(AU)	ZR(AU)	ZR(AU)	ZR(AU)	ZR(AU)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(AV)	ZR(AV)	ZR(AV)	ZR(AV)	ZR(AV)	ZR(AV)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(AW)	ZR(AW)	ZR(AW)	ZR(AW)	ZR(AW)	ZR(AW)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(AX)	ZR(AX)	ZR(AX)	ZR(AX)	ZR(AX)	ZR(AX)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(AY)	ZR(AY)	ZR(AY)	ZR(AY)	ZR(AY)	ZR(AY)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(AZ)	ZR(AZ)	ZR(AZ)	ZR(AZ)	ZR(AZ)	ZR(AZ)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(BA)	ZR(BA)	ZR(BA)	ZR(BA)	ZR(BA)	ZR(BA)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(BB)	ZR(BB)	ZR(BB)	ZR(BB)	ZR(BB)	ZR(BB)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(BC)	ZR(BC)	ZR(BC)	ZR(BC)	ZR(BC)	ZR(BC)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(BD)	ZR(BD)	ZR(BD)	ZR(BD)	ZR(BD)	ZR(BD)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(BE)	ZR(BE)	ZR(BE)	ZR(BE)	ZR(BE)	ZR(BE)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(BF)	ZR(BF)	ZR(BF)	ZR(BF)	ZR(BF)	ZR(BF)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(BG)	ZR(BG)	ZR(BG)	ZR(BG)	ZR(BG)	ZR(BG)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(BH)	ZR(BH)	ZR(BH)	ZR(BH)	ZR(BH)	ZR(BH)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(BI)	ZR(BI)	ZR(BI)	ZR(BI)	ZR(BI)	ZR(BI)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(BJ)	ZR(BJ)	ZR(BJ)	ZR(BJ)	ZR(BJ)	ZR(BJ)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(BK)	ZR(BK)	ZR(BK)	ZR(BK)	ZR(BK)	ZR(BK)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(BL)	ZR(BL)	ZR(BL)	ZR(BL)	ZR(BL)	ZR(BL)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(BM)	ZR(BM)	ZR(BM)	ZR(BM)	ZR(BM)	ZR(BM)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(BN)	ZR(BN)	ZR(BN)	ZR(BN)	ZR(BN)	ZR(BN)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(BO)	ZR(BO)	ZR(BO)	ZR(BO)	ZR(BO)	ZR(BO)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(BP)	ZR(BP)	ZR(BP)	ZR(BP)	ZR(BP)	ZR(BP)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(BQ)	ZR(BQ)	ZR(BQ)	ZR(BQ)	ZR(BQ)	ZR(BQ)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(BR)	ZR(BR)	ZR(BR)	ZR(BR)	ZR(BR)	ZR(BR)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(BS)	ZR(BS)	ZR(BS)	ZR(BS)	ZR(BS)	ZR(BS)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(BT)	ZR(BT)	ZR(BT)	ZR(BT)	ZR(BT)	ZR(BT)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(BU)	ZR(BU)	ZR(BU)	ZR(BU)	ZR(BU)	ZR(BU)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(BV)	ZR(BV)	ZR(BV)	ZR(BV)	ZR(BV)	ZR(BV)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(BW)	ZR(BW)	ZR(BW)	ZR(BW)	ZR(BW)	ZR(BW)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(BX)	ZR(BX)	ZR(BX)	ZR(BX)	ZR(BX)	ZR(BX)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(BY)	ZR(BY)	ZR(BY)	ZR(BY)	ZR(BY)	ZR(BY)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(BZ)	ZR(BZ)	ZR(BZ)	ZR(BZ)	ZR(BZ)	ZR(BZ)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(CA)	ZR(CA)	ZR(CA)	ZR(CA)	ZR(CA)	ZR(CA)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(CB)	ZR(CB)	ZR(CB)	ZR(CB)	ZR(CB)	ZR(CB)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(CC)	ZR(CC)	ZR(CC)	ZR(CC)	ZR(CC)	ZR(CC)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(CD)	ZR(CD)	ZR(CD)	ZR(CD)	ZR(CD)	ZR(CD)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(CE)	ZR(CE)	ZR(CE)	ZR(CE)	ZR(CE)	ZR(CE)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(CF)	ZR(CF)	ZR(CF)	ZR(CF)	ZR(CF)	ZR(CF)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(CG)	ZR(CG)	ZR(CG)	ZR(CG)	ZR(CG)	ZR(CG)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(CH)	ZR(CH)	ZR(CH)	ZR(CH)	ZR(CH)	ZR(CH)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(CI)	ZR(CI)	ZR(CI)	ZR(CI)	ZR(CI)	ZR(CI)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(CJ)	ZR(CJ)	ZR(CJ)	ZR(CJ)	ZR(CJ)	ZR(CJ)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(CK)	ZR(CK)	ZR(CK)	ZR(CK)	ZR(CK)	ZR(CK)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(CL)	ZR(CL)	ZR(CL)	ZR(CL)	ZR(CL)	ZR(CL)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(CM)	ZR(CM)	ZR(CM)	ZR(CM)	ZR(CM)	ZR(CM)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(CN)	ZR(CN)	ZR(CN)	ZR(CN)	ZR(CN)	ZR(CN)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(CO)	ZR(CO)	ZR(CO)	ZR(CO)	ZR(CO)	ZR(CO)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(CP)	ZR(CP)	ZR(CP)	ZR(CP)	ZR(CP)	ZR(CP)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(CQ)	ZR(CQ)	ZR(CQ)	ZR(CQ)	ZR(CQ)	ZR(CQ)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(CR)	ZR(CR)	ZR(CR)	ZR(CR)	ZR(CR)	ZR(CR)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(CS)	ZR(CS)	ZR(CS)	ZR(CS)	ZR(CS)	ZR(CS)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(CT)	ZR(CT)	ZR(CT)	ZR(CT)	ZR(CT)	ZR(CT)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(CU)	ZR(CU)	ZR(CU)	ZR(CU)	ZR(CU)	ZR(CU)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(CV)	ZR(CV)	ZR(CV)	ZR(CV)	ZR(CV)	ZR(CV)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(CW)	ZR(CW)	ZR(CW)	ZR(CW)	ZR(CW)	ZR(CW)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(CX)	ZR(CX)	ZR(CX)	ZR(CX)	ZR(CX)	ZR(CX)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE
ZR(CY)	ZR(CY)	ZR(CY)	ZR(CY)	ZR(CY)	ZR(CY)	ISOBUTENE	PENTANE	ISOPENTANE	ISOPENTANE

THEORETICAL ROCKET PERFORMANCE ASSUMING FROZEN COMPOSITION DURING EXPANSION

PC = 1480.0 PSIA
CASE NO. 300

FUEL	CHEMICAL FORMULA	M	H	O	N	WT FRACTION (SEE NOTE)	ENERGY CAL/MOL	STATE	TEMP DEG K
FUEL C	3.00000 O 9.00000	M 5.00000	M 3.00000			0.113600	-83300.000	S	298.15
FUEL C	4.00000 O 9.00000	M 7.00000	M 3.00000			0.113600	-93070.000	S	298.15
FUEL C	4.00000 O 8.00000	M 8.00000	M 8.00000			0.640000	17930.000	S	298.15
FUEL C	10.00000 O 5.00000	M 16.00000	M 3.00000			0.048300	-202900.000	S	298.15
FUEL C	2.00000 O 1.00000	M 3.00000	M 1.00000			0.016800	-23550.000	S	298.15
FUEL C	7.00000 O 2.00000	M 9.00000	M 8.00000			0.007500	-7460.000	S	298.15
FUEL C	12.00000 O 2.00000	M 14.00000	M 11.00000			0.004000	-15400.000	S	298.15
FUEL C	16.00000 O 2.00000	M 18.00000	M 8.00000			0.003400	-653130.000	S	298.15
FUEL C	12.00000 O 20.00000	M 32.00000	M 15.00000			0.003400	-160200.000	S	298.15
FUEL ZR	1.00000 C 1.00000	M 2.00000	M 5.00000			0.013000	-48500.000	S	298.15
FUEL PB	3.00000 C 12.00000	M 15.00000	M 16.00000			0.004000	0.000	S	298.15
FUEL BI	1.00000 C 18.00000	M 19.00000	M 15.00000			0.000400	0.000	S	298.15

O/F = 0.0000 PERCENT FUEL = 100.0000 EQUIVALENCE RATIO = 1.6706 PHI = 0.0000

CHAMBER THRUST

PC/P	1.0000
P. ATM	100.71
T. DEG K	2951.3
MO. G/CC	9.9799-3
H. CAL/G	-134.63
U. CAL/G	-380.24
G. CAL/G	-7317.61
S. CAL/(G)(K)	2.4338
M. MOL WT	23.879
CP. CAL/(G)(K)	0.4213
GAMMA (S)	1.2419
SOM VEL. M/SEC	1129.7
MACH NUMBER	0.000

PERFORMANCE PARAMETERS

AE/AT	
CE/AR	
CF	
IVAC. LB-SEC/LB	
ISP. LB-SEC/LB	

MOLE FRACTIONS

BI	0.00002	FORMALDEHYDE	0.00000	FORMIC ACID	0.00000	CO	0.32199
CO2	0.07079	H	0.00490	HCN	0.00001	HCO RAD	0.00001
H2O	0.00000	HNO	0.00000	H2	0.13350	H2O	0.21028
N	0.00000	HN	0.00000	H2O	0.00000	HM3	0.00002
NO	0.00033	N2	0.25239	D	0.00006	OH	0.00253
O2	0.00004	PB	0.00035	PBO	0.00007	ZR02	0.00000
ZR02(L)	0.00231						

ADDITIONAL PRODUCTS WHICH WERE CONSIDERED BUT WHOSE MOLE FRACTIONS WERE LESS THAN 0.50000E-06 FOR ALL ASSIGNED CONDITIONS

C									
METHANOL	CM	CM2	CM3	CM4	CM5	METHYLOXIDE	CM6		
KETENE	CM	CM RAD	CM2 RAD	CM3 RAD	CM4 RAD	ETHYLENE	CM5 RAD		
ACETIC ACID	CM3 RAD	METHYL CYANIDE	CM3C0 RAD	CM3C1 RAD	CM3C2 RAD	ACETYLENE	CM4 RAD		
ETHANOL	(FORMIC ACID)2	ETHYL RAD	ETHYL OXIDE RAD	ETHYL OXIDE RAD	ETHANE	ACETALDEHYDE	CM5 RAD		
	CMC RAD	CYANOGEN	CCO RAD	CCO RAD	C3	DIMETHYL ETHER	CM6 RAD		
						CYCLOPROPENE			

PROPYLENE	ALLENE	C3H5 RAD	CYCLOPROPANE	PROPYLENE	PROPYLENE OXIDE	I-PROPYL RAD
M-PROPYL RAD	PROPANE	1-PROPANOL	CARBON SUBOXIDE	CA	BUTADIENE	CYCLOBUTADIENE
BUTAN-1EN-3YN	1,3-BUTADIENE	2-BUTYNE	2-BUTENE TRANS	2-BUTENE CIS	ISOBUTYNE	1-BUTENE
(ACETIC ACID)2	1-BUTYL RAD	5-BUTYL RAD	M-BUTYL RAD	M-BUTANE	ISOBUTANE	CARBON SUBNITRID
CS	CYCLOPENTADIENE	CYCLOPENTANE	1-PENTENE	1-PENTYL RAD	N-PENTYL RAD	PENTANE
ISOPENTANE	CH3(C6H5)2CH3	HEXATRIYNE	PHENYL RAD	PHENOL	BENZENE	PHENOL
CYCLOHEXENE	M-HEXYL RAD	TOLUENE	CREOSOL	1-HEPTENE	M-HEPTYL RAD	M-HEPTANE
1-OCTENE	M-OCTYL RAD	OCTANE	150-OCTANE	M-NOBYL RAD	M-HEPTYL RAD	AZULEME
M-DECYL RAD	O-BIPHENYL RAD	BIPHENYL	JET-A(G)	MNO2	NAPHTHLENE	NO2
M2NO2	M2O2	MCO	MN2O4	MNO2	MNO3	M2H2
M2NO2	M2H4	M2O	M2O4	MNO2	MNO3	M2H2
M3N	O3	PB2	ZR	ZR	ZR	N3
BI(L)	C(GR)	BENZENE(L)	ZR	ZR	ZR	BI(S)
M2O(L)	PB(S)	PB(L)	TOLUENE(L)	DECATANE(L)	ZR	M2O(S)
PB2O4(S)	ZR(A)	ZR(B)	PB(OR)	PB(PW)	PB(L)	PB2(S)
ZR2O(B)			ZR(L)	ZR(S)	ZR(L)	ZR2(S)

NOTE: WEIGHT FRACTION OF FUEL IN TOTAL FUELS AND OF OXIDANT IN TOTAL OXIDANTS
 CALCULATIONS WERE STOPPED BECAUSE NEXT POINT IS MORE THAN 50 DEG BELOW TEMP RANGE OF A CONDENSED SPECIES

DISTRIBUTION LIST

No of Copies

Commander U.S. Army Environmental Hygiene Agency ATTN: HSHB-MO-A Aberdeen Proving Ground, MD 21010	1
Commander U.S. Army Environmental Hygiene Agency ATTN; Library Aberdeen Proving Ground, MD 21010	1
Commander U.S. Army Missile Command ATTN; Propulsion Directorate, RDEC/Mr. L. B. Thorn Redstone Arsenal, AL 35898	1
Commander U.S. Army Medical Research and Development Command ATTN: SGRD-PLC Fort Detrick Frederick, MD 21702-5012	1
Commander U.S. Army Medical Research and Development Command ATTN: SGRD-RMI-S Fort Detrick Frederick, MD 21702-5012	1
Defense Technical Information Center ATTN: DTIC-FDAC Cameron Station Alexandria, VA 22304-6145	2
Commander U.S. Army Biomedical Research and Development Laboratory ATTN: SGRD-UBZ-RA (Ms. Karen Fritz) Fort Detrick Frederick, MD 21702-5010	2
Commander U.S. Army Biomedical Research and Development Laboratory ATTN: SGRD-UBG-O (MAJ Young) Fort Detrick Frederick, MD 21701-5010	26

DISTRIBUTION LIST (Cont'd)

	<u>No of Copies</u>
Central Research Library Bldg. 4500-N, MS-6286 Oak Ridge National Laboratory P. O. Box 2008 Oak Ridge, TN 37831-6286	1
Document Reference Section Bldg. 9711-1 Oak Ridge National Laboratory P. O. Box 2009 Oak Ridge, TN 37831	1
Laboratory Records Bldg. 4500-N, MS-6285 Oak Ridge National Laboratory P. O. Box 2008 Oak Ridge, TN 37831-6285	1
ORNL Patent Office Bldg. 4500-N, MS-6258 Oak Ridge National Laboratory P. O. Box 62 Oak Ridge, TN 37831	1
T. M. Gayle Bldg. 4500-S, MS-6120 Oak Ridge National Laboratory P. O. Box 2008 Oak Ridge, TN 37831-6120	1
M. R. Guerin Bldg. 4500-S, MS-6120 Oak Ridge National Laboratory P. O. Box 2008 Oak Ridge, TN 37831-6120	10
R. A. Jenkins Bldg. 4500-S, MS-6120 Oak Ridge National Laboratory P. O. Box 2008 Oak Ridge, TN 37831-6120	10

DISTRIBUTION LIST (Cont'd)

No of Copies

C. Y. Ma Bldg. 4500-S, MS-6120 Oak Ridge National Laboratory P. O. Box 2008 Oak Ridge, TN 37831-6120	1
R. L. Moody Bechtel National Corp. 151 Lafayette Drive Oak Ridge, TN 37830	1
C. W. Nestor Bldg. 9104-2, MS-8058 Martin Marietta Energy Systems P.O. Box 2009 Oak Ridge, TN 37831-8058	2
Mr. J. A. Reafsnyder Energy Research and Development U.S. Department of Energy Oak Ridge Operations P. O. Box 2008 Oak Ridge, TN 37831-6269	1
C. V. Thompson Bldg. 4500-S, MS-6120 Oak Ridge National Laboratory P. O. Box 2008 Oak Ridge, TN 37831-6120	1
B. A. Tomkins Bldg. 4500-S, MS-6120 Oak Ridge National Laboratory P. O. Box 2008 Oak Ridge, TN 37831-6120	1
Department of Energy Office of Scientific and Technical Information P.O. Box 62 Oak Ridge, TN 37831	10

END

**DATE
FILMED**

3 / 19 / 92

