

UCRL-JC-135478


PREPRINT

X-Ray Imaging to Characterize MeV Electrons Propagation through Plastic Targets

R. B. Stephens
M. Key
J. Koch
D. Pennington

This paper was prepared for submittal to the
First International Conference on Inertial Fusion Sciences and Applications
Bordeaux, France
September 12-17, 1999

September 3, 1999

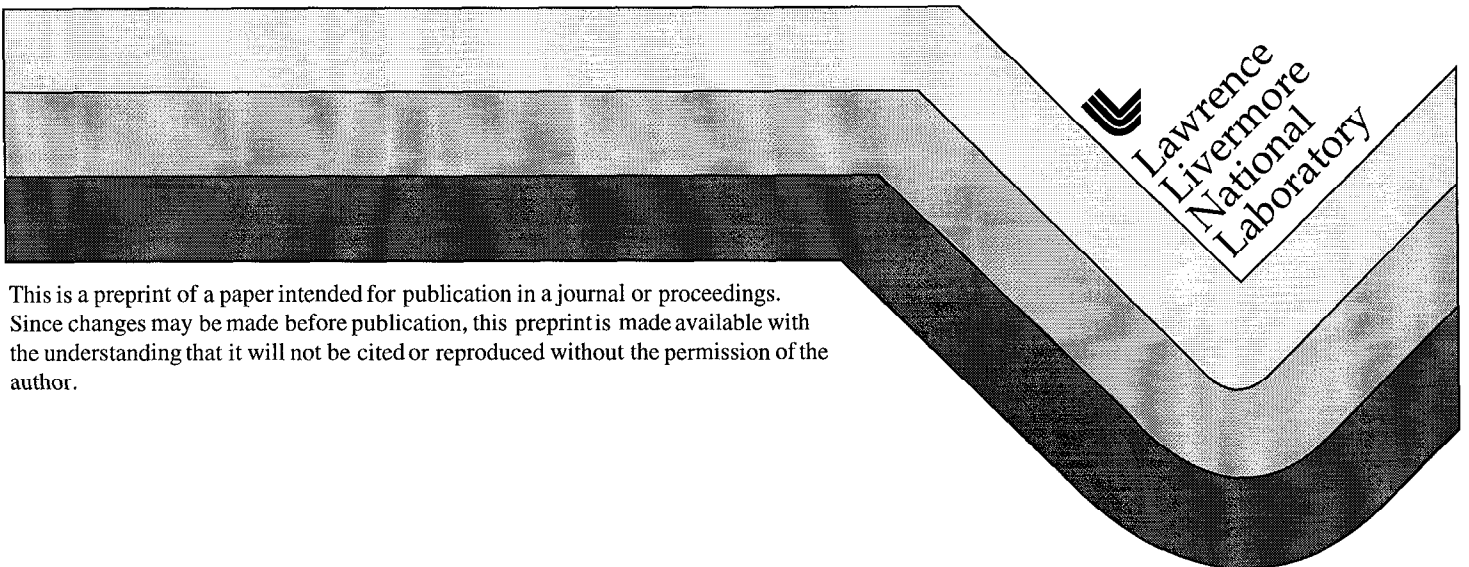

This is a preprint of a paper intended for publication in a journal or proceedings.
Since changes may be made before publication, this preprint is made available with
the understanding that it will not be cited or reproduced without the permission of the
author.

DISCLAIMER

This document was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor the University of California nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or the University of California, and shall not be used for advertising or product endorsement purposes.

X-ray imaging to characterize MeV electrons propagation through plastic targets

R.B. Stephens

Fusion Group, General Atomics

P.O. Box 85608

San Diego CA 92186-5608

M. Key, J. Koch, and D. Pennington

Lawrence Livermore National Laboratory

Livermore, CA 94550

Abstract

A high intensity laser pulse incident on an overdense plasma generates high energy electrons at the critical surface which propagate into the plasma. The details of this propagation is critical to the Fast Ignition process. The energetic electrons emerge as a jet on the far side, but the spread and propagation direction of the jet within the plasma is not well known. By embedding several thin high Z layers in a CH film one can directly image the progress of the electron beam. It loses enough energy to heat the medium through which it travels to hundreds of eV. At that temperature a film, even buried under CH, emits sufficiently hard thermal x-rays to allow imaging the heated area with an x-ray pinhole camera. The film can be thin enough to also see the emissions from another layer near the front of the film. If these two images are ~~be~~ visible simultaneously, one can measure the beam spread and propagation direction within the plastic.

Introduction

The fast ignition (FI) inertial fusion concept [1] depends critically on the converting the photon ignition pulse to a stream of ~ 1 MeV electrons, and propagating them through a dense plasma to heat a compact spot in the target. Conversion of the energy carriers from photons to electrons is required because the plasma becomes opaque at a density of ~ 1 g/cc, considerably before it reaches the >200 g/cc ignition volume. For these densities, the plasma frequency, below which the plasma is strongly absorbing, is in the x-ray range [2]. To date, the direction of energy transport within such plasmas has been largely assessed by looking at the jets emerging from the back of a foil up to a few hundred microns thick [3]. These jets are seen to propagate normal to the back surface; some data shows that this is independent of the direction of the incident photon beam or the orientation of the front surface [4]. Some modeling suggests that the diameter of these jets is strongly decreased by the presence of the back surface [5]. So we need a more

direct measure of the beam propagation in dense plasmas; one which can be used away from sample surfaces.

Experimental Setup

The low x-ray cross-section of carbon relative to higher Z elements offers a possible solution to this problem. At 1 keV, the minimum detectable x-ray energy for the pin hole camera [6], the x-ray absorption length is $\sim 6 \mu\text{m}$ in CH, rapidly increasing with energy [7]; high Z elements absorb up to 60 times more strongly (See Table 1), that enables the use of films so thin that their low resistance will not perturb the high energy electrons or their return current [8]. A film of gold only $0.1 \mu\text{m}$ thick is already 30% opaque, and will emit 30% of black body radiation. This radiation would be only slightly attenuated in exiting the CH film. Moreover, A second buried film would be visible under the first with only another 30% attenuation of its signal (see Figure 1).

Table 1: 1 keV X-ray absorption lengths for selected elements. A foil of *e.g.* Au only a few tenths of a micron thick could radiate brightly through 100 microns of CH. (CH absorption calculated assuming a C density of 1 g/cc.)

Element	Absorption length		
	1	2	4 keV
CH	5	33	270 μm
Aluminum	3.1	1.2	10.0
Molybdenum	0.2	1.0	1.0
Iron	0.1	0.8	4.8
Tantalum	0.1	0.2	0.6
Silver	0.1	0.7	0.7
Manganese	0.2	0.9	6.0
Nickel	0.1	0.5	3.4
Copper	0.1	0.5	3.1
Gold	0.1	0.5	0.4

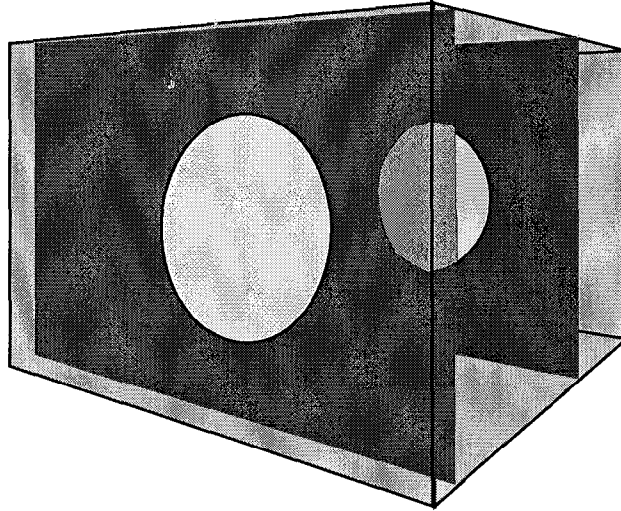


Figure 1: Schematic of target foil with two hi-Z tracer layers embedded in CH. It is viewed from behind, with the laser impinging on the far side. The tracer layers are thin enough to be partially transparent, so both spots can be seen by the x-ray camera.

It has in fact proved possible to look at the beam structure by adding a $0.5\ \mu\text{m}$ gold or aluminum tracer layer buried under a CH surface. Koch et al [9] have demonstrated that the passage of high energy particles through the film deposits energy (either directly or through the associated return current) which heats the film sufficiently to be visible through $>100\ \mu\text{m}$ of CH.

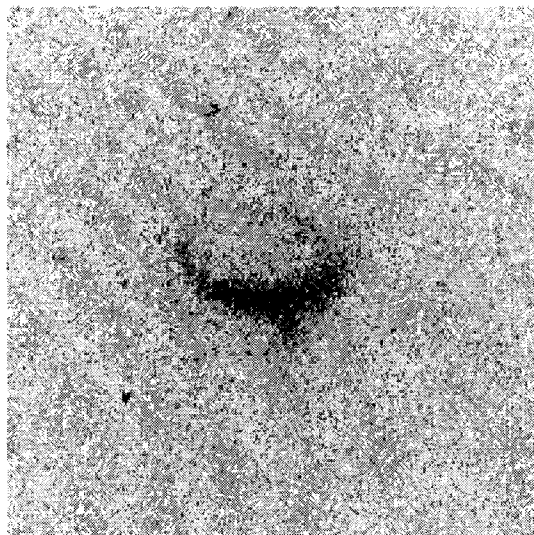


Figure 2: x-ray image from the back of a $100\ \mu\text{m}$ CH foil backed with $0.5\ \mu\text{m}$ Au / 5 CH, and viewed through $100\ \mu\text{m}$ CH filter in addition to the standard $1\ \mu\text{m}$ Be foil. (#29041209) A CH foil without a hi-Z layer does not show any image.

So one can set up the geometry shown in Figure 1. A foil with two tracer layers, one near the front of a foil, and one near the back, would give images which are self referencing.

With one image showing the initial spot location, size, and structure, one can get beam direction, structural evolution spread as it propagates through the foil. There is substantial shot-to-shot variation, and shot locations are not precisely determined *a priori* so that this information is not easily acquired with single tracer layers on successive shots. In addition, these foils can be some distance from the front or back surface, and we can see the character of the beam away from the perturbing surfaces.

Summary

In conclusion, we have shown high Z multiple tracer layers will enable tracking high energy electron beams within an overdense CH plasma far from the plasma boundaries. These foils can be so thin that they should cause minimal perturbation to the propagation of the beam. This will allow determination of the high energy electron direction and beam spread, and investigation of the effects of boundaries on their structure.

Acknowledgements

This work was performed under the auspices of the U.S. Department of Energy by the Lawrence Livermore National Laboratory under contract No. W-7405-ENG-48, with the additional corporate support of General Atomics.

References

- [1] M. Tabak, J. Hammer, M.E. Glinsky, W.L. Kruer, S.C. Wilks, J. Woodworth, E.M. Campbell, and M.D. Perry, "Ignition and gain with ultrapowerful lasers," *Phys. Plasmas* **5** 1626-1634 (1994).
- [2] The critical frequency for light propagation goes as the square root of the electron density, and is >10 eV for $n_e \sim 1$ g/cc and is >100 eV at the 200 g/cc core of a densified target. *Physis Vade Mecum*, 2nd edition, ed. H.L. Anderson (AIP, New York, 1981) p. 279.
- [3] M. Tatarakis, J.R. Davies, P. Lee, P.A. Norreys, N.G. Kassapakis, F.N. Beg, A.R. Bell, M.G. Haines, and A.E. Dangor, "Plasma formation on the front and rear of plastic targets due to high-intensity laser-generated fast electrons," *Phys. Rev. Lett.* **81** 999-1002 (1998).
- [4] M. Key – private communication.
- [5] J.R. Davies, A.R. Bell, and M. Tatarakis, "Magnetic focusing and trapping of high-intensity laser-generated fast electrons at the rear of solid targets," *Phys. Rev. B* **59** 6032-6036 (1999).

- [6] The low energy limit for the x-ray pinhole camera is ~ 1 keV because of the $\sim 1\mu\text{m}$ thick beryllium foil protecting the film from light.
- [7] calculated from W.H. McMaster, N. Kerr Del Grande, J.H. Mallett, and J.H. Hubbell, "Compilation of x-ray cross sections," LLNL document #UCRL-50174-SEC 2 R1, May 1969, available through NTIS.
- [8] A.R. Bell, J.R. Davies, S.M. Guerin, "Magnetic field in short-pulse high-intensity laser-solid experiments," Phys. Rev. B **58** 2471-2473 (1998).
- [9] J.A. Koch, S.P. Hatchett, M.H. Key, R.W. Lee, D. Pennington, R. Stephens, M. Tabak, "Observation of deep directional heating at near-solid density caused by laser-generated relativistic electrons," submitted to PRL Aug '99.