

CONF. 960539--1

## Performance of Co-immobilized Yeast and Glucoamylase in a Fluidized Bed Reactor for Fuel Ethanol Production\*

May Y. Sun<sup>1,2</sup>, Paul R. Bienkowski<sup>1,2</sup>, Brian H. Davison<sup>1,2</sup>, Merry A. Spurrier<sup>1</sup>,  
and Oren F. Webb<sup>1\*\*</sup>

<sup>1</sup>Oak Ridge National Laboratory, P.O. Box 2008, MS-6226, Chemical Technology Division,  
Oak Ridge, TN 37831-6226 (615) 241-4655

<sup>2</sup>University of Tennessee, Department of Chemical Engineering, Knoxville,  
Tennessee 37916

RECEIVED  
JUN 26 1996  
OSTI

For Submission to *Applied Biochemistry and Biotechnology*

# MASTER

The submitted manuscript has been authored by a contractor of the US government under contract DE-AC05-96OR22464. Accordingly, the US government retains a nonexclusive, royalty-free license to publish or reproduce the published form of the contribution, or allow others to do so, for US government purposes.

---

\*Research supported by the Office of Transportation Technologies of the U.S. Department of Energy and administered by the National Renewable Energy Laboratory under contract DE-AC05-96OR22464 with Lockheed Martin Energy Research Corp.

\*\* Author to whom all correspondence should be addressed.

DISTRIBUTION OF THIS DOCUMENT IS UNLIMITED

**DISCLAIMER**

**Portions of this document may be illegible  
in electronic image products. Images are  
produced from the best available original  
document.**

# Performance of Co-immobilized Yeast and Glucoamylase in a Fluidized Bed Reactor for Fuel Ethanol Production\*

May Y. Sun<sup>1,2</sup>, Paul R. Bienkowski<sup>1,2</sup>, Brian H. Davison<sup>1,2</sup>, Merry A. Spurrier<sup>1</sup>, and Oren F. Webb<sup>1\*\*</sup>

<sup>1</sup>Oak Ridge National Laboratory, P.O. Box 2008, MS-6226, Chemical Technology Division, Oak Ridge, TN 37831-6226 (615) 241-4655

<sup>2</sup>University of Tennessee, Department of Chemical Engineering, Knoxville, Tennessee 37916

## ABSTRACT

The performance of co-immobilized *Saccharomyces cerevisiae* and glucoamylase was evaluated in a fluidized bed reactor. Soluble starch and yeast extract were used as feed stocks. The biocatalyst performed well and demonstrated no significant loss of activity or physical integrity during 10 weeks of continuous operation. The reactor was easily operated and required no pH control. No operational problems were encountered from bacterial contaminants even though the reactor was operated under non-sterile conditions over the entire course of experiments. Productivities ranged between 25 to 44 g ethanol L<sup>-1</sup> h<sup>-1</sup>. The experiments demonstrated that ethanol inhibition and bed loading had significant effects on bed performance.

\*The submitted manuscript has been authored by a contractor of the US government under contract DE-AC05-96OR22464. Accordingly, the US government retains a nonexclusive, royalty-free license to publish or reproduce the published form of the contribution, or allow others to do so, for US government purposes.

\*\* Author to whom all correspondence should be addressed.

Key words: Ethanol, glucose, starch, simultaneous saccharification and fermentation, fluidized-bed reactor.

## INTRODUCTION

Domestic ethanol use and production are presently undergoing significant increases along with planning and construction of new production facilities. Raw material costs typically make up 55-75% of the final alcohol selling price (1). Significant efforts are ongoing to reduce

ethanol production costs by investigating new inexpensive feedstocks (woody biomass) and by process improvements in the fermentation and separation steps. Increasing reactor productivity is a potent method of reducing capital costs associated with new construction and expansion of existing facilities. Selection of fermentative organism and the reactor configuration also affect operating cost factors such as yield, energy demand, and control of bacterial infections.

A key element in the development of advanced bioreactor systems capable of very high conversion rates is the retention of high biocatalyst concentrations within the bioreactor and a reaction environment that ensures intimate contact between substrate and biocatalyst. Such strategies include cell recycle by filtration, sedimentation, entrapment by membranes, and immobilization in gel beads (2,3). These retention schemes can then be used with various reactor configurations including continuous-stirred-tank (CSTR), packed-bed (PBR), and fluidized-bed reactors (FBR). Typical batch reactors, commonly used in industry, have volumetric ethanol (EtOH) productivities between 2 and 5 g EtOH L<sup>-1</sup> h<sup>-1</sup> (4,5). On a total reactor volume basis, volumetric productivity for continuous systems with high conversion are reported as approximately 6-8 g EtOH L<sup>-1</sup> h<sup>-1</sup> for a free cell CSTR, 10-16 g L<sup>-1</sup> h<sup>-1</sup> for an immobilized cell CSTR, 10-30 g L<sup>-1</sup> h<sup>-1</sup> for a hollow-fiber reactor, 16-40 g L<sup>-1</sup> h<sup>-1</sup> for a vertical PBR, and 50-120 g L<sup>-1</sup> h<sup>-1</sup> for an immobilized cell FBR (6). One very effective method is to use an immobilized biocatalyst that can be placed into a reaction environment that provides effective mass transport, such as a fluidized bed. Previous studies have shown that such systems may be more than 10 to 50 times as productive as industrial benchmarks (6,7). Economic impacts of the fluidized-bed reactor (FBR) for ethanol production may be significant (8).

In this manuscript we describe FBR experiments for simultaneous saccharification and fermentation of starch which employ entrapped yeast in a covalently cross-linked gelatin.

chytosan. glucoamylase matrix. This study attempts to provide a comparison between yeast and previous FBR investigations. Previous studies with *Zymomonas mobilis* demonstrated significant performance advantages such as very high productivities of 50-200 g ethanol L<sup>-1</sup> h<sup>-1</sup> and high yields around 97 % of theoretical (6,7). Yeast have operational advantages such as excellent pH tolerance. Such a simultaneous saccharification and fermentative approach has the advantage that glucoamylase (AG) and yeast are easily retained in the reactor for continuous use. Starch was used as raw material instead of glucose. Combining saccharification and fermentation in one vessel could reduce capital costs.

## MATERIAL AND METHODS

The *Saccharomyces cerevisiae* cells were immobilized in covalently cross-linked gelatin (6 wt%) and chytosan (0.25 wt%) with amyglucosidase (AG). Biocatalyst diameters ranged between 1.2 to 2.8 mm.

Feed solutions consisted of various concentrations of StarDri 100 starch (A. E. Staley Co., Decatur, IL), 5 g L<sup>-1</sup> Tastetone 900 AG yeast extract (Red Star, Juneau, WI), 0.1 % w/v Antifoam B (Dow Corning, Midland, Michigan) in tap water.

The reactor depicted in Fig. 1 was constructed of a 30 cm inlet section which expanded from 1.27-2.5 cm in ID, three 30 cm sections of 2.5 cm ID jacketed glass pipe, and a 10 cm disengagement section of 9 cm ID with a screened sidearm for disengagement of beads from the reactor effluent. Temperature was controlled at 34 °C by a Haake A82 (Berlin, Germany) recirculating water bath. The feed was introduced at the reactor bottom using a model 7550-60

Masterflex peristaltic pump (Cole Parmer, Niles, IL). The pump was calibrated daily. The reactor was open to the atmosphere for gas-liquid-biocatalyst disengagement at the outlet.

Starch, glucose, and ethanol concentrations were measured using a Shimadzu high performance liquid chromatograph (HPLC) consisting of a RID6A refractive index detector, a SIL 10A auto injector, a LC10AD pump, a SCL10A system controller, CTD10A column oven, and a CR501 integrator. An Aminex HPX-87H (BioRad Laboratories, Hercules, CA) column with a 5 mM H<sub>2</sub>SO<sub>4</sub> mobile phase separated analytes.



Minimal procedures were used for mitigation of contaminant growth. These included (1) changing feed lines with each new charge of feedstocks, (2) replacement of feed containers with each charge of fresh feed, and (3) medium was autoclaved prior to use as significant amounts of contaminants existed in the yeast extract. Previous investigations demonstrated that sterile operation is not necessary: however, the feed must be kept free of high levels of contamination (e.g., contamination > 10<sup>8</sup> cells mL<sup>-1</sup>). The reactor was not sterilized or cleaned after the 10 week experiment began.

## RESULTS AND DISCUSSION

The operability of the reactor was good throughout the experiment. The reactor system generally operated without operator intervention or attendance. The pH within the reactor was not controlled and ranged from approximately 6.5 at the inlet to about 3.5 at the column outlet. The temperature was maintained at 34°C throughout the experiment. The biocatalyst was used continuously for 10 weeks in the FBR without recharging. There was no noticeable loss of

biocatalyst from the bed. There were no obvious signs of physical degradation of the biocatalyst except for very few beads that demonstrated significant diameter increases.

The fluid dynamics and reaction kinetics are coupled and are a complex function of reaction rate, starch and glucose concentration, solids loading, and gas-liquid-solid properties (9,10). The fluidization of the bed changes rapidly with axial position due to significant changes in fluid flow rates and physical properties. Fluidization of the bed can be thought of as occurring in three zones that may be distinguished visually. The first zone, located at the bed entrance, is fluidized by liquid. The second zone, fluidized by gas product, starts within the expansion section and encompasses most of the bed. The third zone, termed the disengagement section, is characterized by high gas holdup (e.g., 5 to 20%) and significant mixing. The axial reaction rate in the FBR is a strong function of reactor biocatalyst concentration. Gas and liquid holdup, and dispersion which become larger in the upper parts of the reactor reduce the biocatalyst concentration. Inside the biocatalyst matrix, starch is hydrolyzed by glucoamylase (AG) to form glucose and then converted to ethanol and carbon dioxide by yeast:



The biocatalyst was loaded with sufficient AG to convert low concentrations of starch at significant rates. The AG reaction rate was thus expected to be rapid at higher starch concentrations.

Figure 2 depicts an example concentration profile for low-starch, reactor loading. Starch concentration decreased with reactor position as AG conversion proceeded. Glucose is an intermediate between the AG and yeast reactions. Hence, axial glucose concentration will be a function of both AG and yeast reaction rates. Glucose accumulates in the first reactor section because of high AG conversion rate (high starch concentration). The ethanol concentration increases as glucose is made available by the AG and then converted by the yeast. Figure 3 illustrates the conversion and/or accumulation of starch, glucose, and ethanol within individual reactor sections. Glucose accumulation in the first section indicates that the yeast reaction is slower than the AG reaction in this section. Yeast reaction rate is a function of glucose concentration but is also affected by substrate and product inhibition. The conversion of starch to glucose drops in later sections as the available starch is reduced by prior reaction. Significant glucose conversion occurred in the second section due to high glucose availability. Product may inhibit yeast in later sections of the reactor.

Figure 4 allows visualization of the effect of mass loading on reactor performance. The data clearly demonstrate that, as mass loading increased, glucose accumulation also increased. Bed position was also important as a variable to indicate the effect of contact time between substrates and the AG and yeast. Thus, as the contact time increased, the total conversion of starch and glucose also increased. The case depicted in Fig. 3 (previously discussed) is shown in Fig. 4 as the first data series closest to the Bed Position axis. In this case, glucose initially accumulated; however as the starch supply rapidly decreased via AG conversion, almost complete conversion of substrates was achieved. The AG reaction is influenced greatly by starch concentration and to a minor extent by glucose concentration. The yeast on the other hand are limited at the reactor inlet by a lack of glucose. As ethanol is formed, the yeast become



inhibited. The onset of ethanol inhibition begins at concentrations of approximately  $20\text{g L}^{-1}$  (1). Figure 4 also indicates that the reaction was limited by yeast and not the AG. Under actual practice, the AG activity would ideally be balanced against the yeast activity to maintain a low glucose concentration throughout the reactor. Yeast are primarily the greatest unknown in this system because their performance not only depends upon glucose and ethanol concentration but also on nutrition, yeast and biocatalyst age, and other factors. The surface was produced by fitting the data to a second order polynomial using position and mass loading as independent variables using the distance-weighted least squares method in Statistica (StatSoft, Inc., Tulsa, Oklahoma) similar to the method of McLain (11). The surface in Fig. 4 is qualitative because of the complex coupling of reactions (AG and yeast) and three phase hydrodynamics.

In a series of experiments, ethanol was added to the reactor feed solution for verifying model kinetics and for reactor scale-up. Ethanol inhibition at the top of the reactor is masked by three phase hydrodynamic effects, gas hold-up in particular. Figure 5 depicts an example of ethanol inhibition. Glucose accumulation was significant because of ethanol in the feed. Ethanol concentration increased slowly relative to the case without ethanol in the feed. As yeast ethanol inhibition increases, the difference in yeast rates and AG will increase as AG is not inhibited by ethanol. Thus, the ratio of glucose to starch concentrations at different points within the reactor was used as a general indicator of ethanol inhibition. Figure 6 allows visualization of the effects of ethanol inhibition on reactor performance. The data clearly show that as the ethanol in the feed increased, that rate differences between AG and yeast became more pronounced. The ratios also depend somewhat upon feed concentrations and liquid feed rates. Figure 7 demonstrates that the mass loading effect was small compared to ethanol inhibition. There was a small increase in the glucose to starch mass ratio with bed position and with mass loading when ethanol was not

added to the feed. The data for Fig. 6 and 7 were generated using the same ranges of starch feed concentrations and flow rates. Statistica generated the surfaces for visualization in Figs 6 and 7.

Figure 8 depicts productivity over the course of the last eight weeks of the ten week experiment. Two weeks were allowed for stabilization of yeast activity. Mass loading varied throughout the experiment by varying feed concentrations and slow rates. The data is grouped into two subsets: one subset containing feeds with ethanol and one subset containing feeds without ethanol. Most of the data with no ethanol in the feed was grouped in the range of 25 to 44 g ethanol L<sup>-1</sup> h<sup>-1</sup>. Three points not falling in this group were due to very low mass loading of the reactor. When ethanol was included in the feed the range of productivities generally ranged between 5 and 25 g ethanol L<sup>-1</sup> h<sup>-1</sup>. The differences in these productivities further demonstrate that ethanol inhibition had a significant effect on reactor performance. Also, there were no obvious declines in productivity in either set of data over time.

The average yield was calculated by the slope of substrate conversion to ethanol production (Fig. 9). The yield for these experiments ranged around 80% of theoretical. A yield of greater than 90% of theoretical has been demonstrated with stirred tank reactors and similar biocatalysts (12). Possibly yeast nutrition played a significant role in this lower yield. In a batch reactor system, Cysewski (13) demonstrated that ethanol yield was severely restricted if the concentration of yeast extract was 4.0g L<sup>-1</sup> or 6.0 g L<sup>-1</sup>. He suggested a yeast extract requirement of 8.5g L<sup>-1</sup>. The physiology of immobilized yeast may differ from free cell physiology. Yeast extract was used at 5 g L<sup>-1</sup> concentration levels for direct comparison with previous work with *Z. mobilis*. Under these conditions, *Z. mobilis* demonstrated yields of 97 and 96% of theoretical for experiments at the batch and pilot scale (6, 7). This data suggests that yeast have higher nutritional requirement than *Z. mobilis* when immobilized. This may not be a significant issue in

industrial processes where very rich nutrient streams such as steep water are routinely used in the fermentation.

### SUMMARY

Co-immobilized yeast and AG were used to effectively convert soluble starch to ethanol in one reactor. This research demonstrates that yeast is very hardy and produces ethanol over a very long period of time. The biocatalyst performed well and demonstrated no significant loss of activity or physical integrity during 10 weeks of continuous operation. The reactor was easily operated and required no pH control. No operational problems were encountered from bacterial contaminants even though the reactor was operated under non-sterile conditions over the entire course of experiments. Ethanol inhibition is an important factor. Productivities ranged significantly above industrial benchmarks. Co-immobilized yeast-AG biocatalyst continues to demonstrate the potential for FBR use.

### ACKNOWLEDGMENTS

Research supported by the Office of Transportation Technologies of the U.S. Department of Energy under contract DE-AC05-84OR21400 with Lockheed Martin Energy Systems, Inc.

### FIGURES

Fig. 1. Fluidized bed reactor schematic. The reactor consisted of an expanded 30 cm inlet section (1.27 to 2.5 cm in ID), three 30 cm sections of 2.5 cm ID jacketed glass pipe, and a 10 cm disengagement section of 9 cm ID with a screened sidearm for disengagement of beads from the reactor effluent.

Fig. 2. Example concentration profile. Starch concentration decreased with reactor position as AG conversion proceeded. Glucose is an intermediate between the AG and yeast reactions initially increased and then decreased. Ethanol concentration increased as the dextrose was converted.

Fig. 3. The conversion and/or accumulation of starch, glucose, and ethanol as change within individual reactor sections.

Fig. 4. Mass loading influence. As mass loading increased, glucose accumulation also increased. Bed position was also important as a variable to indicate the effect of contact time between substrates and the AG and yeast. Glucose is normalized to glucose equivalents in the feed.

Fig. 5. Ethanol inhibition example. The concentration profile of glucose in the reactor was a function of ethanol inhibition demonstrated by addition of ethanol to the feed.

Fig. 6. Visualization ethanol inhibition effects. As yeast ethanol inhibition increased, the difference in glucose and starch conversion rates increased because AG was not inhibited. The ratio of glucose to starch concentrations at different points within the reactor was used as a general indicator of ethanol inhibition.

Fig. 7. Influence of mass loading on dextrose conversion and accumulation. The ratio of glucose to starch is a function of yeast and AG reaction rates. There is a small affect on the ratio of glucose to starch within the bed with bed position and mass feed rate.

Fig. 8. Productivity profile. The data is grouped into two subsets: one subset containing feeds with ethanol and one subset containing feeds without ethanol. Most of the data with no ethanol in the feed was grouped in the range of 25 to 44 g ethanol L<sup>-1</sup>h<sup>-1</sup>. Low values were due to very low loading of the reactor. When ethanol was included in the feed, the range of productivities generally ranged between 5 and 25 g ethanol L<sup>-1</sup>h<sup>-1</sup>. The differences in these productivity further demonstrate that ethanol inhibition had a significant effect on reactor performance. From both set of data, there were no obvious declines in productivity.

Fig. 9. Average yield. The yield for these experiments ranged around 80% of theoretical as measured by the slope of substrate converted to ethanol produced. Possibly, yeast nutrition limited yield.

### DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

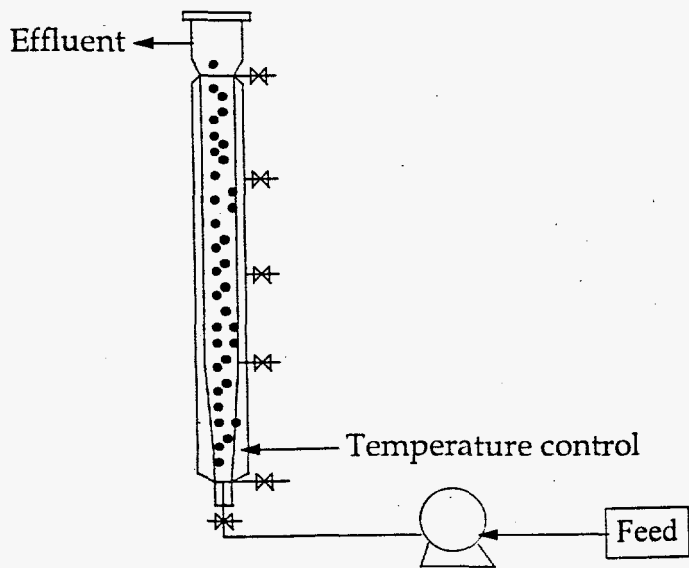


Fig. 1.

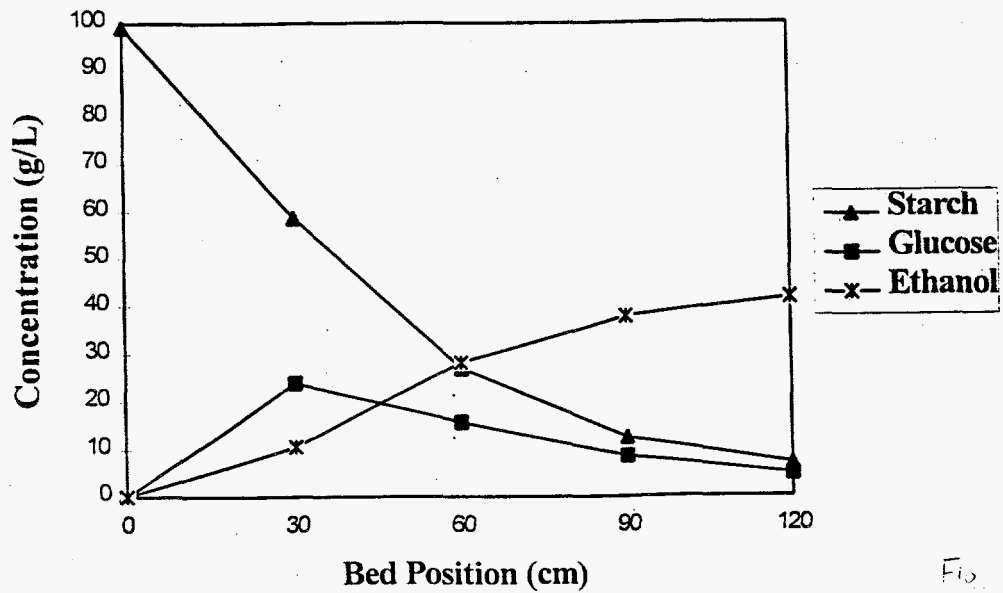


Fig. 2.






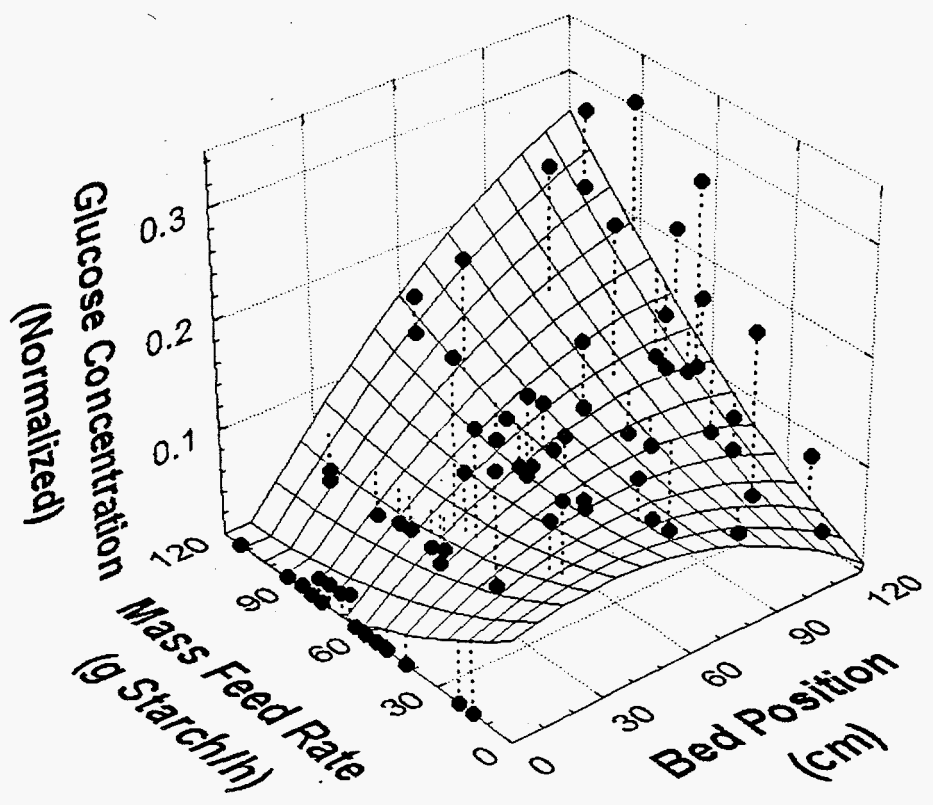


Fig. 2

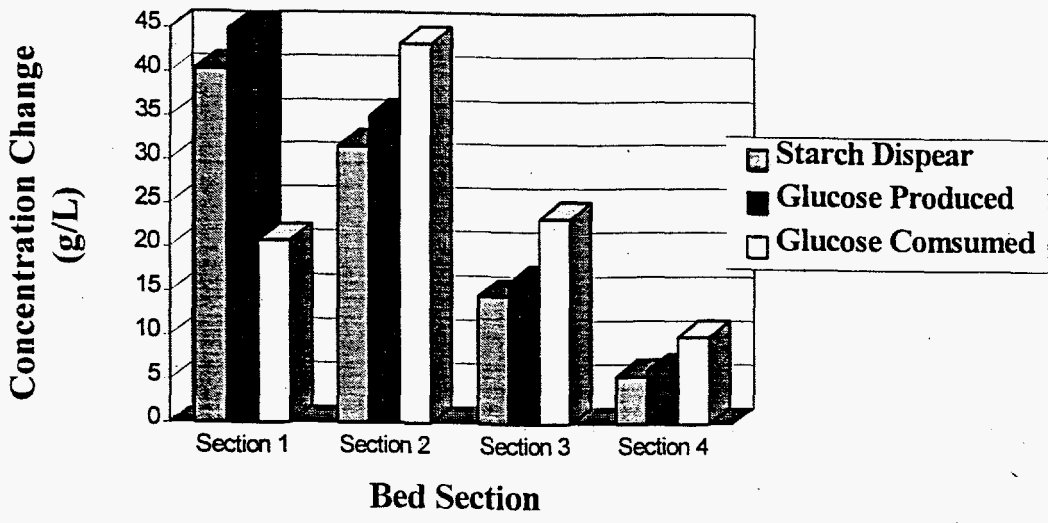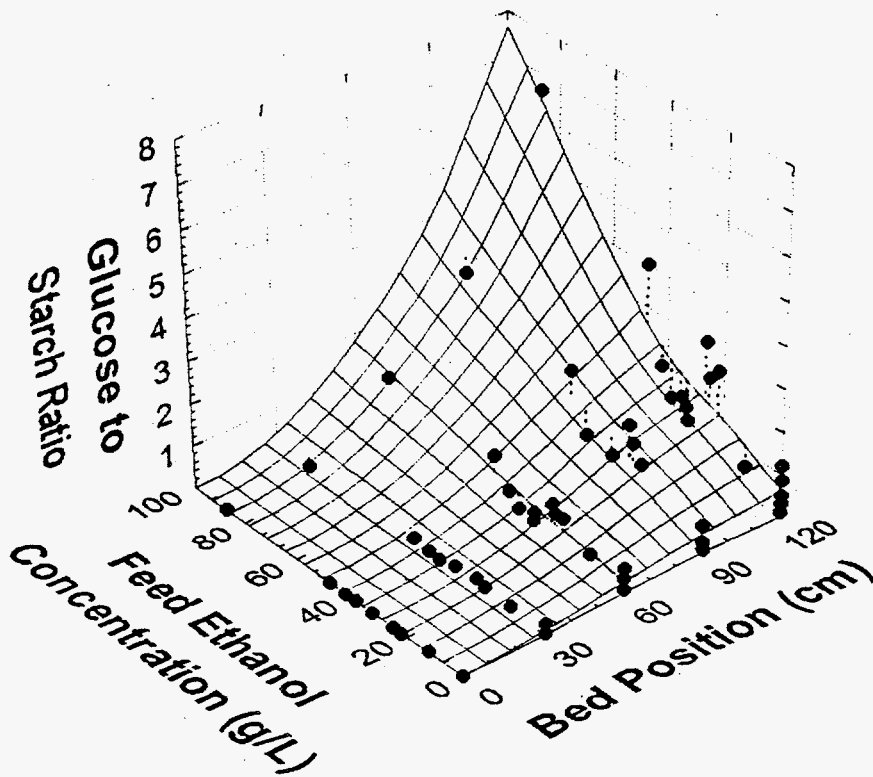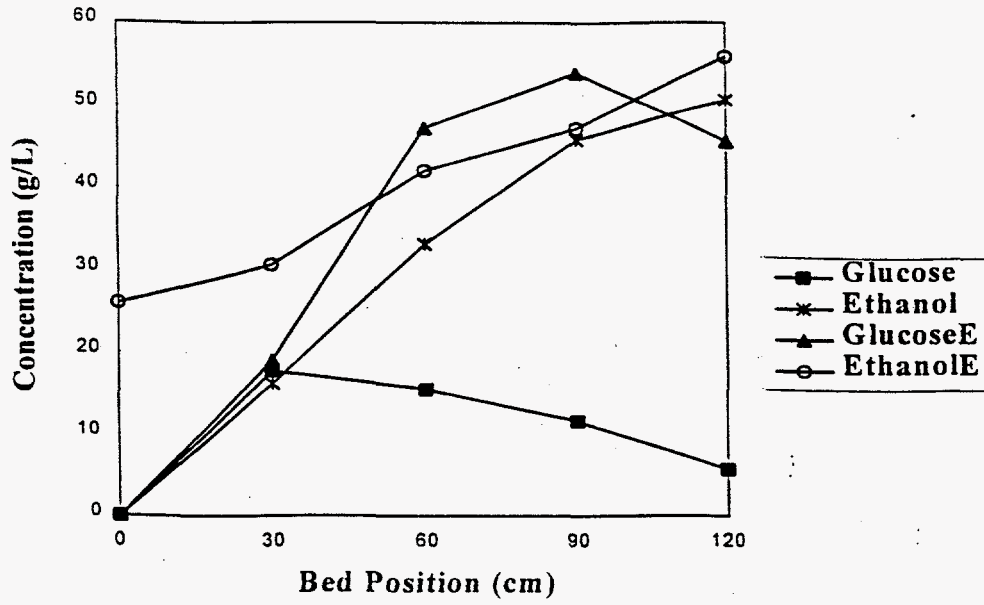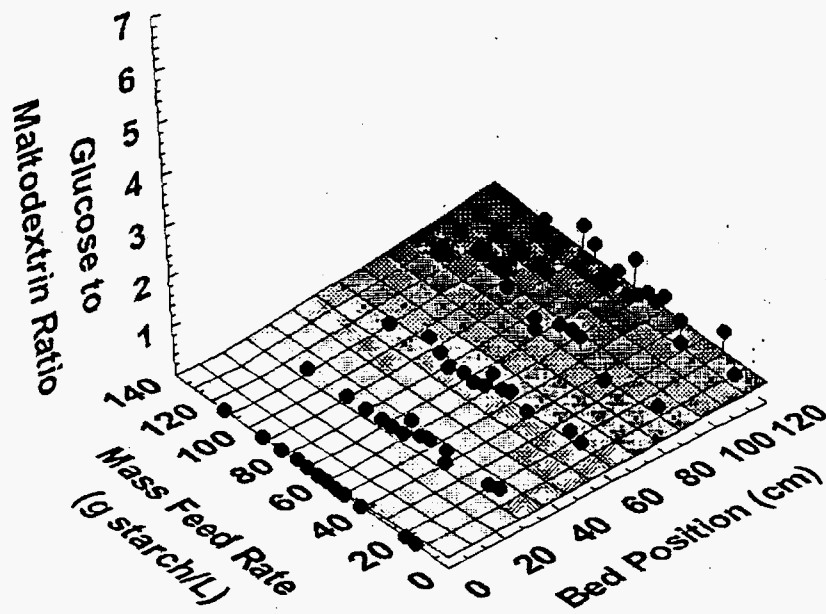

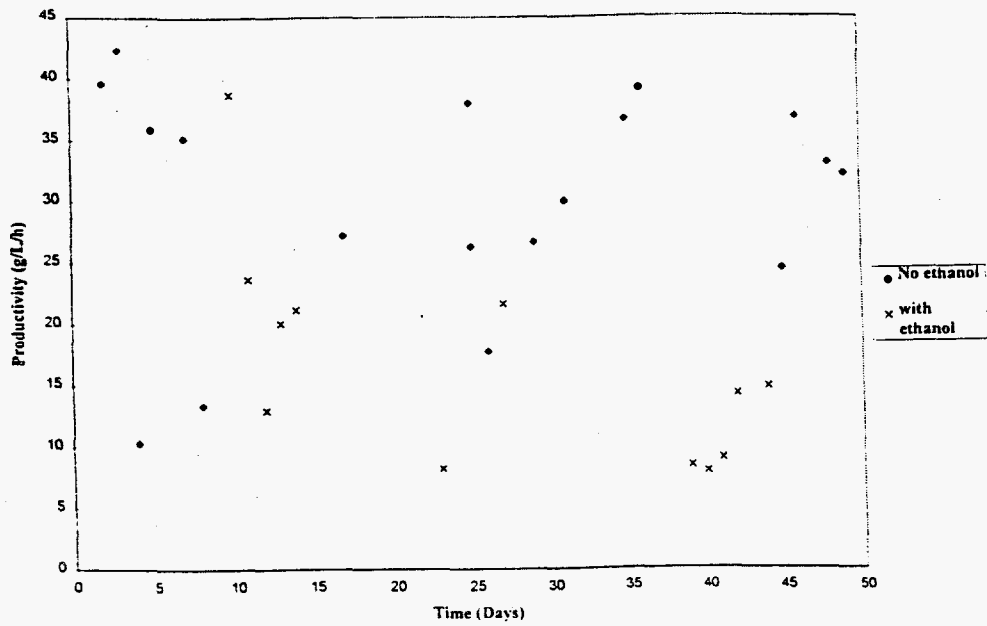

7





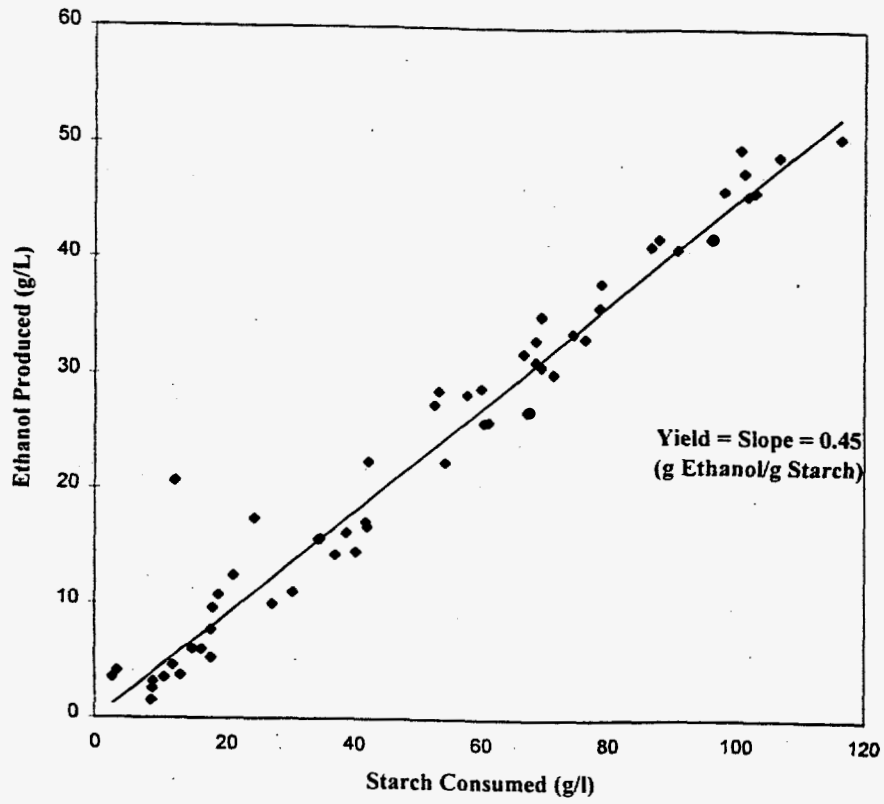


Fig. 2

## REFERENCES

1. Maiorella (1985), in *Comprehensive Biotechnology*, ed. H.W. Blanch, S. Drew and D.C. Wang, **3**, 861.
2. Crueger, W. and A. Crueger, *Biotechnology: A Textbook of Industrial Microbiology*, Science Tech, Inc. Madison, WI, 1982.
3. Inloes, D. S., Michaels, A. S., Robertson, C. R., and Matin, A. (1985), *Appl. Microbiol. Biotechnol.* **23**, 85-91.
4. Silman, R. W. (1984), *Biotechnol. Bioeng.* **26**, 247-51.
5. Bajpai, P. K. and Margaritis, A. (1985), *Enzyme Microb. Technol.*, **7**, 462-64.
6. Davison, B. H. and Scott, C. D. (1988), *Appl. Biochem. Biotechnol.* **18**, 19.
7. Webb, O. F., Scott, T. C., Davison, B. H., and C. D. Scott, (1995), *Appl. Biochem. Biotechnol.* **51/52**, 559.
8. Harshbarger, D., Bautz, M., Davison, B. H., Scott, T. C., and Scott, C. D. (1995), *Appl. Biochem. Biotechnol.* **51/52**, 593.
9. Petersen, J. N. and Davison, B. H. (1995), *Biotechnol. Bioeng.* **46**, 139.
10. Webb, O. F., Davison, B. H., and Scott, T. C., (1996), *Appl. Biochem. Biotechnol.* (In Press).
11. McLain, D. H., (1974), *The Computer Journal*, **17**, 318.
12. Wallace, T. C., (1993) Personal communication.
13. Cysewski, G.R. (1976), "Fermentation Kinetics and Process Economics for the Production of Ethanol", Ph.D Dissertation, University of California, Berkeley.