

~~*****~~ RMIS View/Print Document Cover Sheet ~~*****~~

This document was retrieved from the Documentation and Records Management (DRM) ISEARCH System. It is intended for Information only and may not be the most recent or updated version. Contact a Document Service Center (see Hanford Info for locations) if you need additional retrieval information.

Accession #: D196004702

Document #: SD-EN-FDC-002

Title/Desc:

FDC FOR FY1993-2000 GROUNDWATER MONITORING WELLS
93-L-GFW-152

Pages: 39

ENGINEERING CHANGE NOTICE

Page 1 of 2

1. ECN No 618187

Proj.
ECN

2. ECM Category (mark one) Supplemental <input type="checkbox"/> Direct Revision <input checked="" type="checkbox"/> Change ECM <input type="checkbox"/> Temporary <input type="checkbox"/> Standby <input type="checkbox"/> Supersedure <input type="checkbox"/> Cancel/Void <input type="checkbox"/>	3. Originator's Name, Organization, MSIN, and Telephone No. B.A. Williams, Groundwater Management, H6-06, 376-3416 5. Project Title/No./Work Order No. Functional Design Criteria for FY 1993-2000 Groundwater Monitoring Wells/OM623/R43AA 8. Document Numbers Changed by this ECN (includes sheet no. and rev.) WHC-SD-EN-FDC-002, Rev 1.	3a. USA Required? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No 6. Bldg./Sys./Fac. No. N/A 9. Related ECN No(s). 169869	4. Date July 18, 1995 7. Approval Designator QESD 10. Related PO No. N/A
11a. Modification Work <input type="checkbox"/> Yes (fill out Blk. 11b) <input checked="" type="checkbox"/> No (NA Blks. 11b, 11c, 11d)	11b. Work Package No. N/A	11c. Modification Work Complete N/A Cog. Engineer Signature & Date	11d. Restored to Original Condition (Temp. or Standby ECN only) N/A Cog. Engineer Signature & Date
12. Description of Change <p>The purpose of this revision is to update the Line Item Project, 93L GFW-152, Functional Design Criteria (FDC) to reflect changes approved in change control M-24-91-6, Engineering Change Notices (ECNs), expand the scope to include subsurface investigations along with the borehole drilling. This revision improves the ability and effectiveness of maintaining RCRA and Operational groundwater compliance by combining borehole and well drilling with subsurface data gathering objectives.</p> <p>The total projected number of wells to be installed under this project has decreased from 200 to 80 and the scope has been broadened to include additional subsurface investigation activities that usually occur simultaneously with most traditional borehole drilling and monitoring well installations. This includes borehole hydrogeologic characterization activities, and vadose monitoring. These activities are required under RCRA 40 CFR 264 and 265 and WAC 173-303 for site characterization, groundwater and vadose assesement and well placement.</p>			
13a. Justification (mark one) Criteria Change <input type="checkbox"/> Design Improvement <input type="checkbox"/> Environmental <input checked="" type="checkbox"/> Facility Deactivation <input type="checkbox"/> As-Found <input type="checkbox"/> Facilitate Const <input type="checkbox"/> Const. Error/Omission <input type="checkbox"/> Design Error/Omission <input type="checkbox"/>			
13b. Justification Details See Attached Revision			
14. Distribution (include name, MSIN, and no. of copies) See Attached			

JAN 04 1996	
DATE:	HANFORD
STA: 21	RELEASE
ID:	21

ENGINEERING CHANGE NOTICE				Page 2 of 2	1. ECN (use no. from pg. 1) 618187																																																																																
15. Design Verification Required <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	16. Cost Impact <table style="width: 100%; border-collapse: collapse;"> <tr> <th style="width: 50%; text-align: center;">ENGINEERING</th> <th style="width: 50%; text-align: center;">CONSTRUCTION</th> </tr> <tr> <td style="padding: 5px;">Additional <input type="checkbox"/> \$</td> <td style="padding: 5px;">Additional <input type="checkbox"/> \$</td> </tr> <tr> <td style="padding: 5px;">Savings <input type="checkbox"/> \$</td> <td style="padding: 5px;">Savings <input type="checkbox"/> \$</td> </tr> </table>			ENGINEERING	CONSTRUCTION	Additional <input type="checkbox"/> \$	Additional <input type="checkbox"/> \$	Savings <input type="checkbox"/> \$	Savings <input type="checkbox"/> \$	17. Schedule Impact (days) Improvement <input type="checkbox"/> Delay <input type="checkbox"/>																																																																											
ENGINEERING	CONSTRUCTION																																																																																				
Additional <input type="checkbox"/> \$	Additional <input type="checkbox"/> \$																																																																																				
Savings <input type="checkbox"/> \$	Savings <input type="checkbox"/> \$																																																																																				
18. Change Impact Review: Indicate the related documents (other than the engineering documents identified on Side 1) that will be affected by the change described in Block 12. Enter the affected document number in Block 19.																																																																																					
SDD/DD <input type="checkbox"/>	Seismic/Stress Analysis <input type="checkbox"/>	Tank Calibration Manual <input type="checkbox"/>																																																																																			
Functional Design Criteria <input type="checkbox"/>	Stress/Design Report <input type="checkbox"/>	Health Physics Procedure <input type="checkbox"/>																																																																																			
Operating Specification <input type="checkbox"/>	Interface Control Drawing <input type="checkbox"/>	Spares Multiple Unit Listing <input type="checkbox"/>																																																																																			
Criticality Specification <input type="checkbox"/>	Calibration Procedure <input type="checkbox"/>	Test Procedures/Specification <input type="checkbox"/>																																																																																			
Conceptual Design Report <input type="checkbox"/>	Installation Procedure <input type="checkbox"/>	Component Index <input type="checkbox"/>																																																																																			
Equipment Spec. <input type="checkbox"/>	Maintenance Procedure <input type="checkbox"/>	ASME Coded Item <input type="checkbox"/>																																																																																			
Const. Spec. <input type="checkbox"/>	Engineering Procedure <input type="checkbox"/>	Human Factor Consideration <input type="checkbox"/>																																																																																			
Procurement Spec. <input type="checkbox"/>	Operating Instruction <input type="checkbox"/>	Computer Software <input type="checkbox"/>																																																																																			
Vendor Information <input type="checkbox"/>	Operating Procedure <input type="checkbox"/>	Electric Circuit Schedule <input type="checkbox"/>																																																																																			
OM Manual <input type="checkbox"/>	Operational Safety Requirement <input type="checkbox"/>	ICRS Procedure <input type="checkbox"/>																																																																																			
FSAR/SAR <input type="checkbox"/>	IEFD Drawing <input type="checkbox"/>	Process Control Manual/Plan <input type="checkbox"/>																																																																																			
Safety Equipment List <input type="checkbox"/>	Cell Arrangement Drawing <input type="checkbox"/>	Process Flow Chart <input type="checkbox"/>																																																																																			
Radiation Work Permit <input type="checkbox"/>	Essential Material Specification <input type="checkbox"/>	Purchase Requisition <input type="checkbox"/>																																																																																			
Environmental Impact Statement <input type="checkbox"/>	Fac. Proc. Samp. Schedule <input type="checkbox"/>	Tickler File <input type="checkbox"/>																																																																																			
Environmental Report <input type="checkbox"/>	Inspection Plan <input type="checkbox"/>																																																																																				
Environmental Permit <input type="checkbox"/>	Inventory Adjustment Request <input type="checkbox"/>																																																																																				
19. Other Affected Documents: (NOTE: Documents listed below will not be revised by this ECN.) Signatures below indicate that the signing organization has been notified of other affected documents listed below.																																																																																					
Document Number/Revision		Document Number/Revision		Document Number/Revision																																																																																	
N/A																																																																																					
20. Approvals <table style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 40%;">Signature</th> <th style="width: 10%;">Date</th> <th style="width: 40%;">Signature</th> <th style="width: 10%;">Date</th> </tr> </thead> <tbody> <tr> <td colspan="4">OPERATIONS AND ENGINEERING</td> </tr> <tr> <td>Cog. Eng. B. A. Williams <i>[Signature]</i></td> <td>10/12/95</td> <td>PE</td> <td></td> </tr> <tr> <td>Cog. Mgr. J. S. Schmid <i>[Signature]</i></td> <td>10/26/95</td> <td>QA</td> <td></td> </tr> <tr> <td>QA W. R. Thackaberry <i>[Signature]</i></td> <td>10-23-95</td> <td>Safety</td> <td></td> </tr> <tr> <td>Safety <i>[Signature]</i></td> <td>11/17/95</td> <td>Design</td> <td></td> </tr> <tr> <td>Environ. <i>[Signature]</i></td> <td>11/15/95</td> <td>Environ.</td> <td></td> </tr> <tr> <td>Other <i>[Signature]</i></td> <td>10-26-95</td> <td>Other</td> <td></td> </tr> <tr> <td><i>[Signature]</i></td> <td>11/18/95</td> <td></td> <td></td> </tr> <tr> <td><i>[Signature]</i></td> <td>11/9/95</td> <td></td> <td></td> </tr> <tr> <td colspan="4">ARCHITECT-ENGINEER</td> </tr> <tr> <td colspan="4">Signature or a Control Number that tracks the Approval Signature</td> </tr> <tr> <td colspan="3"></td> <td>11/2/96</td> </tr> <tr> <td colspan="4">DEPARTMENT OF ENERGY</td> </tr> <tr> <td colspan="4">Signature or a Control Number that tracks the Approval Signature</td> </tr> <tr> <td colspan="3"></td> <td></td> </tr> <tr> <td colspan="4">ADDITIONAL</td> </tr> <tr> <td colspan="4"></td> </tr> <tr> <td colspan="4"></td> </tr> <tr> <td colspan="4"></td> </tr> </tbody> </table>						Signature	Date	Signature	Date	OPERATIONS AND ENGINEERING				Cog. Eng. B. A. Williams <i>[Signature]</i>	10/12/95	PE		Cog. Mgr. J. S. Schmid <i>[Signature]</i>	10/26/95	QA		QA W. R. Thackaberry <i>[Signature]</i>	10-23-95	Safety		Safety <i>[Signature]</i>	11/17/95	Design		Environ. <i>[Signature]</i>	11/15/95	Environ.		Other <i>[Signature]</i>	10-26-95	Other		<i>[Signature]</i>	11/18/95			<i>[Signature]</i>	11/9/95			ARCHITECT-ENGINEER				Signature or a Control Number that tracks the Approval Signature							11/2/96	DEPARTMENT OF ENERGY				Signature or a Control Number that tracks the Approval Signature								ADDITIONAL															
Signature	Date	Signature	Date																																																																																		
OPERATIONS AND ENGINEERING																																																																																					
Cog. Eng. B. A. Williams <i>[Signature]</i>	10/12/95	PE																																																																																			
Cog. Mgr. J. S. Schmid <i>[Signature]</i>	10/26/95	QA																																																																																			
QA W. R. Thackaberry <i>[Signature]</i>	10-23-95	Safety																																																																																			
Safety <i>[Signature]</i>	11/17/95	Design																																																																																			
Environ. <i>[Signature]</i>	11/15/95	Environ.																																																																																			
Other <i>[Signature]</i>	10-26-95	Other																																																																																			
<i>[Signature]</i>	11/18/95																																																																																				
<i>[Signature]</i>	11/9/95																																																																																				
ARCHITECT-ENGINEER																																																																																					
Signature or a Control Number that tracks the Approval Signature																																																																																					
			11/2/96																																																																																		
DEPARTMENT OF ENERGY																																																																																					
Signature or a Control Number that tracks the Approval Signature																																																																																					
ADDITIONAL																																																																																					

Functional Design Criteria for FY 1993-2000 Groundwater Monitoring Wells

B. A. Williams

Westinghouse Hanford Company, Richland, WA 99352

U.S. Department of Energy Contract DE-AC06-87RL10930

EDT/ECN: ECN-618187

UC: 2000

Org Code: W8H230

Charge Code: R4069

B&R Code: EW5010006

Total Pages: 35

Key Words: RCRA wells, design criteria, borehole drilling, characterization

Abstract:


The purpose of this revision is to update the Line Item Project, 93-L-GFW-152 Functional Design Criteria (FDC) to reflect changes approved in change control M-24-91-6, Engineering Change Notices (ECNs), and expand the scope to include subsurface investigations along with the borehole drilling. This revision improved the ability and effectiveness of maintaining RCRA and Operational groundwater compliance by combining borehole and well drilling with subsurface data gathering objectives.

The total projected number of wells to be installed under this project has decreased from 200 and the scope has been broadened to include additional subsurface investigation activities that usually occur simultaneously with most traditional borehole drilling and monitoring well installations. This includes borehole hydrogeologic characterization activities, and vadose monitoring. These activities are required under RCRA 40 CFR 264 and 265 and WAC 173-303 for site characterization, groundwater and vadose assessment and well placement.

TRADEMARK DISCLAIMER. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors.

Printed in the United States of America. To obtain copies of this document, contact: WHC/BCS Document Control Services, P.O. Box 1970, Mailstop H6-08, Richland WA 99352. Phone (509) 372-2420; Fax (509) 376-4989.

Karen A. Nolan 1/4/96
Release Approval Date

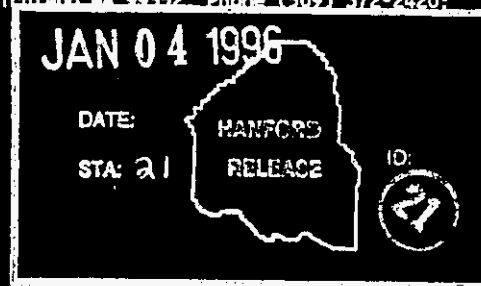

Approved for Public Release

Functional Design Criteria for Fiscal Years 1993 through 2000 Groundwater Monitoring Wells 93-L-GFW-152

Prepared for the U.S. Department of Energy
Office of Environmental Restoration and
Waste Management



Westinghouse
Hanford Company Richland, Washington

Management and Operations Contractor for the
U.S. Department of Energy under Contract DE-AC06-87RL10930

Approved for Public Release

FUNCTIONAL DESIGN CRITERIA
FOR
FISCAL YEARS 1993 THROUGH 2000
GROUNDWATER MONITORING WELLS
93L-GFW-152

Issued by

Westinghouse Hanford Company

June 1990

Revised June 1995

for the

U.S. Department of Energy
Richland Operations Office
Richland, Washington


Prepared by:


 B. A. Williams, Principal Engineer
 Hanford Technical Services
 Groundwater Management Group
 10/12/95
 Date


Westinghouse Hanford Company Approvals:


 J. B. Witt, Manager
 Environmental Waste Management Project
 Engineering Group
 10-26-95
 Date


 J. R. Kelly, Manager
 Waste and Environmental Projects
 11-8-95
 Date


 M. A. Tredway, Manager
 Analytical and Environmental
 Services Safety Operations Support
 11/17/95
 Date


 M. R. Adams, Manager
 Hanford Technical Services
 11/24/95
 Date


 D. G. Farwick, Manager
 Analytical and Environmental
 Quality Assurance
 10/23/95
 Date


 W. E. Toebe, Manager
 Environmental Policy
 11/15/95
 Date

U.S. Department of Energy-Richland Operations Office Approval:


 M. J. Furman
 U.S. Department of Energy
 Richland Operations Office
 1/4/96
 Date

TABLE OF CONTENTS

1.0	INTRODUCTION	1-1
1.1	SCOPE	1-1
1.2	JUSTIFICATION	1-3
2.0	FUNCTIONAL CRITERIA	2-1
2.1	SITE LOCATION	2-1
2.2	DECOMMISSIONING	2-3
3.0	PROCESS DESIGN CRITERIA	3-1
4.0	WELL DESIGN CRITERIA	4-1
4.1	ARCHITECTURAL	4-1
4.2	MAINTENANCE	4-3
5.0	GENERAL REQUIREMENTS	5-1
5.1	SAFETY	5-1
5.1.1	Safety Analysis	5-1
5.1.2	Environmental Protection	5-1
5.1.3	Contamination Control	5-2
5.1.4	Shielding	5-2
5.2	SAFEGUARDS AND SECURITY	5-2
5.3	DESIGN FORMAT	5-2
5.4	QUALITY ASSURANCE	5-3
5.4.1	Quality Assurance Onsite	5-3
5.4.2	Interface Coordination	5-3
6.0	CODES AND STANDARDS	6-1
7.0	REFERENCES	7-1

APPENDIX

A	DESIGN GUIDANCE	A-i
---	---------------------------	-----

LIST OF TERMS

CERCLA	<i>Comprehensive Environmental Response, Compensation, and Liability Act</i>
CFR	<i>Code of Federal Regulation</i>
CX	categorical exclusion
DOE	U.S. Department of Energy
DOE-RL	U.S. Department of Energy, Richland Operations Office
Ecology	Washington State Department of Ecology
EPA	U.S. Environmental Protection Agency
FDC	Functional Design Criteria
FY	fiscal year
HASP	health and safety plans
HSWA	<i>Hazardous and Solid Waste Amendment of 1989</i>
NEPA	<i>National Environmental Policy Act of 1969</i>
rad/chem	radiological and chemical
RCRA	<i>Resource Conservation and Recovery Act of 1976</i>
SALDS	State Approved Land Disposal System
TEDF	Treated Effluent Discharge Facility
TEGD	RCRA Technical Enforcement Guidance Document
Tri-Party Agreement	<i>Hanford Federal Facility Agreement and Consent Order</i>
TSD	treatment, storage, and disposal
WAC	Washington Administrative Code
WHC	Westinghouse Hanford Company
WMO	Waste Management Operations
WMU	waste management unit

**FUNCTIONAL DESIGN CRITERIA
FOR FISCAL YEARS 1993 THROUGH 2000
GROUNDWATER MONITORING WELLS**

1.0 INTRODUCTION

This document addresses the Functional Design Criteria (FDC) for the construction of monitoring wells (groundwater and vadose) under the *Resource Conservation and Recovery Act of 1976 (RCRA)* and Operational Groundwater Monitoring program (ROM) from Fiscal Years (FY) 1993 through 2000 (DOE 1989).

The ROM provides early detection and near-field assessment of Hanford Site operations on groundwater quality. U.S. Department of Energy (DOE) Order 5480.4, *Environmental Protection, Safety, and Health Protection Standards* (DOE 1984), Federal (Title 40, *Code of Federal Regulation [CFR]*, Part 264, Subpart F and 40 CFR 265 Subpart F), and state environmental regulations (*Washington Administrative Code [WAC]* 173-160, WAC 173-303, WAC 173-304) require monitoring wells to be installed around RCRA treatment, storage, and disposal (TSD) units and solid waste landfill facilities. The Washington State Department of Ecology (Ecology) requires that permitted effluent discharge facilities at the Hanford Site install groundwater monitoring wells. DOE Order 5400.1 (IV) (DOE 1988), Westinghouse Hanford Company (WHC) controlled manuals WHC-CM-7-4 and WHC-CM-7-5, and as described in the Environmental Monitoring Plan for the Hanford Site (DOE, Richland Operations Office [DOE-RL] 1994) also require near-field operational (sites not covered by state discharge permits, RCRA or *Comprehensive Environmental Response, Compensation, and Liability Act [CERCLA]*) groundwater monitoring in support of Waste Management Operations (WMO) operational monitoring.

Borehole drilling and well installation provide access to the subsurface for vadose and groundwater monitoring. These activities also provide for hydrogeologic characterization of the subsurface, including identification of preferential vadose and groundwater flow paths, identification of the uppermost aquifer properties (including confining boundaries), and radiological and chemical (rad/chem) data acquisition to determine whether a facility or TSD unit affects the aquifer (contaminant assessment).

1.1 SCOPE

This revision to Project 93L-GFW-152 (Project W-152) will cover the requirements for borehole drilling/probing, hydrogeologic data gathering, and well installation at RCRA TSD units, operational sites, and for related environmental testing that supports the ROM program. This FDC covers those monitoring wells that will be constructed in FY 1993 through 2000 (as modified in Project W-152 Baseline Change Request W-152-014.1).

Less than 15 wells are anticipated to be drilled in any remaining project year. This estimate is based on the monitoring status of TSD units and operational facilities and sites. Results and evaluations from ongoing TSD

unit sampling and analysis, continued hydrogeologic assessment, and declining water levels provide the basis for these additional well requirements.

The installation of groundwater monitoring networks at RCRA TSD units is scheduled and prioritized in the legally binding *Hanford Federal Facility Agreement and Consent Order* (Tri-Party Agreement), (Ecology et al. 1994) Action Plan, and in permitting documents for meeting RCRA permitting needs at the Hanford Site. A change to the Tri-Party Agreement (M-24-91-6) was issued in November 1991 reducing the 50-well-per-year requirement to well installations "as needed," as defined and approved in yearly interim milestones. The Tri-Party Agreement requires that wells be installed around RCRA TSD units until RCRA-compliant monitoring systems are completed.

Project W-152 also covers operational wells needed to support WMO. The *Hazardous and Solid Waste Amendment of 1989* (HSWA 3004[U]) provides that any permit issued after November 8, 1984, must require corrective action for all releases of hazardous waste or constituents from any solid waste management unit (WMU) (operational sites) regardless of when the waste was placed at the unit. This action will require additional subsurface data gathering and monitoring well installations around affected operational sites undergoing continuing, new, or expanding operations. Operational groundwater well needs are defined and approved through ongoing state negotiated waste discharge permit applications (i.e., State Approved Land Disposal System [SALDS] and the Treated Effluent Discharge Facility [TEDF]). In addition, DOE has ongoing facility impact assessments (i.e., 100-K Fuel Storage Basins) that require groundwater and vadose monitoring support. It is important to plan additional wells at these operations to ensure that Federal and state monitoring requirements are met.

Project W-152 also will support well installation for special engineering needs to support environmental testing programs such as Hanford Site background/baseline studies, flowmeter and vertical profiling studies, and facility citing studies.

This document provides requirements for subsurface hydrogeologic characterization, rad/chem data acquisition, and well installations for groundwater and vadose monitoring systems for hazardous, mixed, and radioactive waste disposal sites. The gathering of characterization data during well drilling and construction is necessary to establish the pedigree of the well to ensure that it is fit for the intended use. This practice is equivalent to acquiring certified materials test reports or testing results for construction of systems requiring specified safety and design factors. The value and design of the well is diminished greatly (less defensible) without the supporting data to establish the wells effectiveness, to sample the appropriate portion of the aquifer, and to confirm that construction is in accordance with the regulatory requirements. When completed, monitoring systems shall comply with RCRA regulations and laws for well construction and groundwater monitoring as described in WAC 173-160 and 173-303, and 40 CFR Parts 264 and 265. Other requirements for monitoring wells are found in applicable DOE orders related to groundwater monitoring of radionuclide waste disposal sites.

1.2 JUSTIFICATION

DOE Order 5480.4 states that DOE facilities will comply with environmental regulations and laws, and monitor the groundwater to detect and assess any potential contamination from its operations and activities. The Tri-Party Agreement, which was signed by DOE, Ecology, and U.S. Environmental Protection Agency (EPA), is a guiding document for this effort. Commitments were made in the Tri-Party Agreement for installing groundwater monitoring wells for RCRA sites (Milestone M-24-00). Failure to meet Tri-Party Agreement milestones could result in fines and legal action by the EPA and Ecology, which would have a negative impact on all Hanford Site activities.

This page intentionally left blank.

2.0 FUNCTIONAL CRITERIA

Project W-152 will provide groundwater and vadose monitoring systems for RCRA and operational facilities throughout the Hanford Site. Monitoring wells around TSDs and operational WMUs are prioritized in accordance with Tri-Party Agreement milestones, permitting documents, and programmatic commitments. Tri-Party Agreement interim milestones will designate the number of monitoring wells that will be installed at each unit. The design and construction of any well must meet Ecology requirements set forth in WAC 173-160 and WAC 173-162.

The completed monitoring system must meet the applicable functional criteria identified in WAC 173-303-645, 40 CFR 264 Subpart F, and 40 CFR 265 Subpart F, for interim- and final-status facilities and applicable and appropriate regulatory guidelines provided in the RCRA Technical Enforcement Guidance Document (TEGD) (EPA 1986). Functional criteria for well installation activities, including requirements from these regulatory documents, are summarized in the following list with the source of each criterion listed in parenthesis at the end of its description:

- The groundwater monitoring system must be capable of yielding groundwater samples for analysis that are representative of water quality in the uppermost aquifer (40 CFR 265)
- Site characterization must include enough hydrogeologic information to determine potential pathways of constituent migration, including identifying aquifer intercommunication pathways, hydrogeologic parameters, and aquifer boundaries, including those of deeper aquifers that may be associated with the uppermost aquifer (TEGD)
- At least one monitoring well must be installed hydraulically upgradient from the waste management area. That well will provide groundwater samples from the uppermost aquifer with water quality not affected by the facility (40 CFR 265)
- At least three monitoring wells must be installed hydraulically downgradient of the waste management area. The number, location, and depth must ensure that the wells detect any statistically significant amounts of hazardous waste or hazardous waste constituents that may migrate from the waste management area to the uppermost aquifer (40 CFR 265)
- Monitoring wells shall have a design life to include the active life of the disposal facility plus the 30-year post-closure period (40 CFR 265).

Specific criteria for TSD unit characterization and installation of RCRA wells are found in the RCRA TEGD and in *RCRA Groundwater Monitoring: Draft Technical Guidance* (EPA 1992).

2.1 SITE LOCATION

Monitoring wells installed between FYs 1993 and 2000 will be located at TSD units, such as those identified in the current Appendix B (not attached) of the Tri-Party Agreement Action Plan, and at existing or new operational sites that require Ecology- or EPA-compliant monitoring, and are not currently listed in the Tri-Party Agreement. Strategic placement of the wells is needed to complete site hydrogeologic characterization, support vadose monitoring, and immediately detect contaminant releases and migration from a TSD unit, thus decreasing the severity and impact of the release.

Monitoring wells will be located in the 100, 200, 300, 600, and 1100 Areas. Current RCRA sites that require monitoring networks, as identified in Part A permit applications, are the following:

- 100-D Ponds
- 183-H Solar Evaporation Basin
- 200 Area Low-level Burial Ground
- 200 East Area Liquid Effluent Retention Facility
- 216-A-10 Crib
- 216-A-29 Ditch
- 216-A-36B Crib
- 216-A-37-1 Crib
- 216-B-3 Pond
- 216-B-63 Trench
- 216-U-12 Crib
- 216-S-10 Pond and Ditch
- 300 Area process trenches
- 1301-N Liquid Waste Disposal Facility
- 1324-N/NA basins
- 1325-N Liquid Waste Disposal Facility
- 2101-M Pond
- Nonradioactive dangerous waste landfill
- Single-shell tanks.

Current state and Operational Sites that require monitoring are the following:

- Solid waste landfill
- 100 K fuel storage basins
- 200 Area Effluent Treatment Facility
- 200 Area Treated Effluent Disposal Facility
- 200 Area 222-S Laboratory
- 216-S-26 Crib
- 400 Area ponds
- 216-B-62 Crib
- Plutonium Uranium Extraction cribs
- U and T Plant cribs and ditches.

Monitoring sites, along with the specific well locations, are identified through ongoing investigations, permitting, and monitoring programs, and will be identified during future negotiations with the regulators. These sites will be included in the Tri-Party Agreement as the document is reviewed and

revised annually. Operational wells will be identified and documented in other programmatic documents (e.g., 100 K Basins Well Installation Plan, state discharge permit applications, etc).

As much foresight as possible should be used to locate and construct the selected monitoring wells to support plausible final compliance monitoring systems, to identify changes to RCRA networks that may require modifications from near-field to semi-regional monitoring, and to support the coordination and integration with other Hanford Site monitoring projects. This will maximize the cost effectiveness and long-term efficiency of the system.

2.2 DECOMMISSIONING

The scope of this FDC covers only borehole drilling, characterization, and well installation and does not apply to active maintenance, decommissioning, or abandonment of wells. Well design shall not include any features that would preclude abandonment in accordance with WAC 173-160. Project W-152 wells under construction (drilling, characterization, or completion phase) that cannot be completed to meet Ecology requirements will be abandoned in accordance to WAC 173-160 requirements.

RCRA wells need not be abandoned until designated TSD units are certified closed and post-closure activities are completed in accordance with Federal and state requirements and/or the groundwater is cleaned up to background or the applicable and appropriate standards.

This page intentionally left blank.

3.0 PROCESS DESIGN CRITERIA

Process design is not applicable to well installation and function.

This page intentionally left blank.

4.0 WELL DESIGN CRITERIA

All wells will be designed in accordance with WAC 173-160, "Minimum Standards for the Construction and Maintenance of Wells." The drilling of boreholes and the emplacement of monitoring systems, "resource protection wells," is required for characterization, detection, and assessment of hazardous or radioactive substances that might have entered the groundwater at a particular facility. If well screens are not placed appropriately within the aquifer, a contaminant release to the groundwater may migrate undetected, increasing the severity and impact of the release. The hydrogeologic characterization of each unit will dictate the exact screen and casing depth for each well. Refer to Appendix A for additional design guidance. Specific site characterization and data acquisition requirements will be reported in groundwater monitoring plans.

Each TSD unit or operational site will consist of several individual monitoring wells, each of which provides access to the uppermost aquifer system for characterization, data gathering, and collection of representative groundwater samples. TSD unit characterization requirements and existing data will dictate the number and depth of boreholes needed to adequately define the extent and characteristics of the aquifer system including the vadose zone. The requirements for monitoring wells and characterization boreholes will be coordinated and integrated to minimize the number and depth of boreholes at each unit.

Design and construction required by WHC also shall conform to the WHC series of controlled manuals (e.g., WHC-CM-6-1, *Standard Engineering Practices*, WHC-CM-7-5, *Environmental Compliance Manual*, WHC-CM-7-7, *Environmental Investigation and Site Characterizations Manual*, WHC-CM-4-33, *Security Manual*, and WHC-S-014, *Generic Well Specification*) or equivalent procedures or orders. Design and construction efforts shall be in accordance with the latest revisions of the regulations, codes, and standards. Subsequent changes to regulations, codes, and standards that affect the design shall be evaluated and controlled in accordance with WHC-CM-6-1, EP-2.2, "Engineering Document Change Control."

4.1 ARCHITECTURAL

Wells and characterization boreholes shall be drilled, constructed, developed, and tested in a manner that will permit representative sampling and assessment of the subsurface hydrogeologic conditions and environment. The monitoring well design shall incorporate features to protect and preserve the well from normal environmental conditions, operational activities, and subsurface conditions that might cause damage to the monitoring well (WAC 173-160). Well-drilling equipment, and permanent and temporary construction materials, must not introduce contaminants to the soil column/aquifer or permit cross contamination between boreholes or aquifers (WAC 173-160 and 40 CFR 265).

All monitoring wells must be cased and screened with nonreactive materials in a manner that maintains the integrity of the monitoring well. The screen must be packed with filter pack material or sand, where necessary,

and properly located to enable representative groundwater sample collection at depths where appropriate aquifer flow zones exist (WAC 173-160). Dedicated, nonreactive pumps must be installed to allow purging and sampling of each well.

The annular space (i.e., the space between the borehole and well casing) above the screened interval must be sealed with a suitable material (e.g., cement or bentonite) to prevent contaminant and fluid migration down the annulus (WAC 173-160).

The wells will be designed to allow for routine inspections and camera surveys to assess well conditions.

The installed wells will incorporate one or more of the following features:

- Groundwater sampling using a dedicated pump and assembly for purging and sampling
- Vadose zone sampling/monitoring using various approved direct or indirect methods (i.e., tensiometers or borehole geophysics)
- Water production/injection for varied applications uses a dedicated high-volume pump system
- Piezometric head measurements
- Water level measurements
- Aquifer testing such as slug or constant discharge hydraulic tests, flow meter tests, vertical profiling, and tracer tests.

All unknown, suspect, or known hazardous drilling generated wastes, including drill cuttings, purge water, and decontamination water, must be contained, sampled, and dispositioned according to WHC-CM-7-7, or appropriate WHC controlled manual series.

The completed monitoring well will be accepted for use as a "resource protection well" (as defined in WAC 173-160) only after verification of the following:

- 1) Representative sampling interval - the verification of a representative interval will be confirmed by review of sieve, or recovered core (split spoon or whole core) analysis data, aquifer or flow meter results, and as necessary, rad/chem groundwater sampling results;
- 2) Effective annular well seal - the verification will be confirmed by review of geophysical and as-built log data, tally of sealing materials placed, or annular pressure testing;
- 3) Wellhead surface protection - the verification will be confirmed by visual inspection as per the WAC requirements;

- 4) Effective aquifer communication - the verification will be confirmed by review of development data, aquifer testing and/or flow meter results.

4.2 MAINTENANCE

The monitoring well will be designed to allow for ease of maintenance, access, and use. This FDC covers only the installation of wells and does not apply to future maintenance or remediation requirements.

This page intentionally left blank.

5.0 GENERAL REQUIREMENTS

5.1 SAFETY

Hazards associated with the construction of well systems are routine to many industries and generally accepted by the public. During construction of the monitoring wells, applicable and approved health and safety plans (HASP) will be followed to provide for the protection of construction personnel in accordance with WHC-CM-1-10, "Safety Manual," and 29 CFR 1910, "Hazardous Waste Operations and Emergency Response."

Safety documentation of groundwater monitoring wells will assess the potential hazards associated with groundwater monitoring wells in accordance to DOE Order 5481.1B (DOE 1986). A review of specific well installations will be performed before drilling to ensure that the work falls within the bounds of the safety analysis and the controls stated in the safety analysis. The safety analysis will be modified or otherwise revised if unique hazards (radiological and toxicological) are identified in the review. WHC Safety (Industrial Safety and Fire Protection, Health Physics) will review and approve the RCRA Sitewide HASP and appropriate individual site-specific hazardous waste operations permits, job safety analyses, or radiation work permits before drilling.

The safety classification of the groundwater monitoring wells was established in WHC-SD-EN-PLN-001, *Safety Class Designation of Groundwater Monitoring Wells*. The safety classification complies with WHC-CM-1-3, *Management Requirements and Procedures*, MRP 5.46, "Safety Classification of Systems, Components, and Structures."

The acceptability of monitoring well design, construction, and operation under normal conditions shall be evaluated in accordance with the following safety considerations.

5.1.1 Safety Analysis

Well construction and installation activities must meet applicable *Occupational Safety and Health Act of 1970* standards. All well site activities will be covered by a site-specific safety plan (29 CFR 1910). Each site-specific safety plan will outline all known and potentially hazardous conditions, safety considerations, and actions that may be required under the given field conditions, or in an emergency situation.

5.1.2 Environmental Protection

The design, construction, and operation of a monitoring well shall not result in contamination of the groundwater by radioactive and hazardous waste in excess of requirements specified in WHC-CM-7-5, *Environmental Compliance*, or WAC 173-303, respectively.

The design, construction, and operation of a monitoring well shall comply with all applicable requirements of the *National Environmental Policy Act of 1969* (NEPA) categorical exclusion (CX) for the installation and monitoring of RCRA and related groundwater monitoring systems at the Hanford Site (DOE-RL 1992).

5.1.3 Contamination Control

During construction, disposal of any contaminated purge water, sediments, and construction materials or tools shall comply with the following appropriate safety standards and procedures.

All contaminated materials must be removed from the drill site and disposed of or decontaminated in accordance with WHC-CM-5-16, *Hazardous Waste Management*. These include the drilling rig, equipment and tools, drill cuttings, decontamination fluids, and disposed samples. Purge water, which includes aquifer test and development water, shall be managed in accordance with WHC-CM-7-7 or WHC-MR-0039, *Strategy for Handling and Disposing of Purgewater at the Hanford Site, Washington* (WHC 1989). Drill cuttings and slurries shall be managed in accordance with WHC-CM-7-7.

After the well is installed, the surrounding area that was affected by the drilling will be restored as much as possible to original conditions and cleaned up in accordance with DOE Order 6430.1A (DOE 1989).

5.1.4 Shielding

During construction activities, exposure of personnel to ionizing radiation and/or hazardous chemical agents shall be less than the levels specified in HSRCM-1, Rev. 2, *Hanford Site Radiological Control Manual*, and shall not be in excess of the requirements set forth in 29 CFR 1910. Specific exposure levels will be identified and documented in the appropriate site HASP.

5.2 SAFEGUARDS AND SECURITY

The locations of the proposed monitoring systems lie within the 100, 200, 300, 600, and 1100 Areas. Each groundwater well will be protected to prevent damage and unauthorized access per WAC 173-160 and as specified in the *Generic Well Specification*, WHC-S-014.

5.3 DESIGN FORMAT

The format for all groundwater well designs and installation procedures will be verified according to WHC-CM-6-1, EP-4.1, "Design Verification Requirements," and comply with EP-1.2, "Preparation of Engineering Specifications." On completion of the well, all traceable documents (e.g., inspection reports, driller logs, geologists logs, as-built diagrams, and borehole geophysical logs) will be transferred to WHC, tracked, and controlled in accordance with WHC-CM-4-2, QR 17.0, "Quality Assurance

Records." Well data reports (data packages and characterization reports) are prepared and published, as required, by regulations in accordance with WHC-CM-7-8.

The installation of wells under Project W-152 will allow for the flexibility to develop engineering and design concepts, and perform down-hole characterization to satisfy special project requirements at minimum cost and schedule. These special requirements may include hybrid well design in support of geophysical logging, subsurface wellhead design in high traffic areas and parking lots, design of small diameter piezometers for water level measurements, and access for flowmeter measurements and vertical rad/chem profiling.

5.4 QUALITY ASSURANCE

The basis for establishing QA program requirements is the safety classification, as defined in WHC-CM-1-3, *Management Requirements and Procedures*, MRP 5.46, "Safety Classification of Systems, Components and Structures." The overall safety class for RCRA groundwater monitoring wells has been established as Safety Class 3, as documented in WHC-SD-EN-PLN-001, *Safety Class Designation of Groundwater Monitoring Wells* (WHC 1992).

5.4.1 Quality Assurance Onsite

Quality assurance activities for all contractors involved in design, construction, and testing of the project shall be formulated and executed in accordance with the project-specific quality assurance plan (WHC-CM-4-2, QI 2.1) and must meet the quality assurance requirements of the Tri-Party Agreement, as applicable. Program requirements established in the quality assurance plan shall be consistent with DOE Order 5700.6C, *Quality Assurance*.

5.4.2 Interface Coordination

The successful completion of Project W-152 will be achieved through meetings and planned discussions to resolve conflicts or problems. WHC review and approval of ensuing documents will be defined in accordance with WHC-CM-6-1, EP 1.6, "Engineering Data Transmittal," EP 1.7, "Engineering Document Approval and Release Requirements," and EP 2.2, "Engineering Document Change Control." Interface responsibilities for the various facilities involved will be defined in the project-specific quality assurance program plan and interface requirements for the project will be defined in accordance with WHC-CM-6-1, EP 1.5, *Interface Control*.

This page intentionally left blank.

6.0 CODES AND STANDARDS

Design and construction shall be in accordance with the following DOE orders. For each DOE order, the DOE-Headquarters order is followed by the corresponding DOE-RL order as applicable.

- DOE Order 232.1, *Occurrence Reporting and Processing of Operations Information*
- DOE Order 5400.2A, *Environmental Compliance Issue Coordination*
- DOE Order 5400.5, *Radiation Protection of the Public and the Environment*
- DOE Order 5480.3, *Safety Requirements for the Packaging and Transportation of Hazardous Materials, Hazardous Substances, and Hazardous Wastes*
- DOE Order 5480.9A, *Construction Project Safety and Health Management*
- DOE Order 5480.17, *Site Safety Representatives*
- DOE Order 5484.1, *Environmental Protection, Safety, and Health Protection Information Reporting Requirements*
DOE-RLIP 5484.1, *Environmental Protection, Safety, and Health Protection Information Reporting Requirements*
- DOE Order 6430.1A, *General Design Criteria*
(-99 sections do not apply)
- DOE 5700.6C, *Quality Assurance*.

Design and construction shall be in accordance with the following Federal and state regulations, and applicable references within regulations, codes, and standards:

- 29 CFR 1910, "Hazardous Waste Operations and Emergency Response"
- 40 CFR 264, "Environmental Protection Agency Regulations for Owners and Operators of Permitted Hazardous Waste Facilities"
- 40 CFR 265, "Environmental Protection Agency Interim Status Standards for Owners and Operators of Hazardous Waste Facilities"
- WAC 173-160, "Minimum Standards for the Construction and Maintenance of Wells"
- WAC 173-162, "Rules and Regulations Governing the Regulation and Licensing of Well Contractors and Operators"
- WAC 173-303, "Dangerous Waste Regulations"
- WAC 173-304, "Minimum Functional Standards for Solid Waste Handling."

This page intentionally left blank.

7.0 REFERENCES

- 29 CFR 1910, "Hazardous Waste Operations and Emergency Response," *Code of Federal Regulations*, as amended.
- 40 CFR 264, "Environmental Protection Agency Regulations for Owners and Operators of Permitted Hazardous Waste Facilities," *Code of Federal Regulations*, as amended.
- 40 CFR 265, "Environmental Protection Agency Interim Status Standards for Owners and Operators of Hazardous Waste Facilities," *Code of Federal Regulations*, as amended.
- Comprehensive Environmental Response, Compensation, and Liability Act of 1980*, 42 USC 9601, et seq.
- DOE, 1984, *Environmental Protection, Safety, and Health Protection Standards*, DOE Order 5484.1, U.S. Department of Energy, Washington, D.C.
- DOE, 1985, *Safety Requirements for the Packaging and Transportation of Hazardous Materials, Hazardous Substances, and Hazardous Wastes*, DOE Order 5480.3, U.S. Department of Energy, Washington, D.C.
- DOE, 1986, *Safety Analysis and Review System*, DOE Order 5481.1B, U.S. Department of Energy, Washington, D.C.
- DOE, 1988, *Site Safety Representatives*, DOE Order 5480.17, U.S. Department of Energy, Washington, D.C.
- DOE, 1989, *Environmental Compliance Issue Coordination*, DOE Order 5400.2A, U.S. Department of Energy, Washington, D.C.
- DOE, 1989, *General Design Criteria*, DOE Order 6430.1A, U.S. Department of Energy, Washington, D.C.
- DOE, 1990, *Radiation Protection of the Public and the Environment*, DOE Order 5400.5, U.S. Department of Energy, Washington, D.C.
- DOE, 1991, *Quality Assurance*, DOE Order 5700.6C, U.S. Department of Energy, Washington, D.C.
- DOE, 1994, *Construction Project Safety and Health Management*, DOE Order 5480.9A, U.S. Department of Energy, Washington, D.C.
- DOE, 1995, *Occurrence Reporting and Processing of Operations Information*, DOE Order 232.1, U.S. Department of Energy, Washington, D.C.
- DOE-RL, 1992, "Categorical Exclusion for Installation and Monitoring of RCRA and Related Groundwater Monitoring Systems, Hanford Site", 91-EAB-150, U.S. Department of Energy, Richland Operations Office, Richland, Washington.

- DOE-RL, 1993, *Environmental Protection, Safety, and Health Protection Standards*, DOE-RLIP 5484.1, U.S. Department of Energy, Richland Operations Office, Richland, Washington.
- DOE-RL, 1994, *Hanford Site Environmental Monitoring Plan*, DOE/RL-91-50, Rev 1, U.S. Department of Energy, Richland Operations Office, Richland, Washington.
- Ecology, EPA, and DOE, 1994, *Hanford Federal Facility Agreement and Consent Order*, as amended, Washington State Department of Ecology, U.S. Environmental Protection Agency, and U.S. Department of Energy, Olympia, Washington.
- EPA, 1986, *RCRA Groundwater Monitoring Technical Enforcement Guidance Document*, OSWER-9950.1, U.S. Environmental Protection Agency, Washington, D.C.
- EPA, 1992, *RCRA Groundwater Monitoring: Draft and Technical Guidelines*, U.S. Environmental Protection Agency, Washington, D.C.
- Hazardous and Solid Waste Amendment of 1989*, HSWA 3004, et seq.
- HSRCM-1, Rev. 2, *Hanford Site Radiological Control Manual*, Westinghouse Hanford Company, Richland, Washington.
- National Environmental Policy Act of 1969*, 42 USC 4321, et seq.
- Occupational Safety and Health Act of 1970*, 29 USC 651, et seq.
- Resource Conservation and Recovery Act of 1976*, 42 USC 6901, et seq.
- WAC-173-160, "Minimum Standards for the Construction and Maintenance of Wells," *Washington Administrative Code*, as amended.
- WAC-173-162, "Rules and Regulations Governing the Regulations and Licensing of Well Contractors," *Washington Administrative Code*, as amended.
- WAC 173-303, "Dangerous Waste Regulations," *Washington Administrative Code*, as amended.
- WAC 173-304, "Minimum Functional Standards for Solid Waste Handling," *Washington Administrative Code*, as amended.
- WHC-S-014, *Generic Well Specification*, Rev. 7, Westinghouse Hanford Company, Richland, Washington.
- WHC, 1989, *Strategy for Handling and Disposing of Purgewater at the Hanford Site*, Washington, WHC-MR-0039, Westinghouse Hanford Company, Richland, Washington.
- WHC, 1992, *Safety Class Designation of Groundwater Monitoring Wells*, WHC-SD-EN-PLN-001, Westinghouse Hanford Company, Richland, Washington.

WHC-CM-1-10, *Safety Manual*, Westinghouse Hanford Company, Richland, Washington.

WHC-CM-4-33, *Security Manual*, Westinghouse Hanford Company, Richland, Washington.

WHC-CM-5-16, *Hazardous Waste Management*, Westinghouse Hanford Company, Richland, Washington.

WHC-CM-6-1, *Standard Engineering Practices*, Westinghouse Hanford Company, Richland, Washington.

WHC-CM-7-5, *Environmental Compliance*, Westinghouse Hanford Company, Richland, Washington.

WHC-CM-7-7, *Environmental Investigations and Site Characterization Manual*, Westinghouse Hanford Company, Richland, Washington.

This page intentionally left blank.

APPENDIX A
DESIGN GUIDANCE

This page intentionally left blank.

APPENDIX A

DESIGN GUIDANCE

This appendix is for Architect-Engineer information only.

In designing the monitoring wells and the layout of both the initial work and the final design for the monitoring systems, extensive use and evaluation should be made of available information. This information includes:

- Open literature information
- Draft technical guidance provided by regulatory agencies
- Experience gained by the design of previous groundwater monitoring systems (i.e., design of individual monitoring wells, design of the total system, drilling techniques, well completion techniques, and hydrogeologic testing and characterization)
- Experience in drilling monitoring wells at the Hanford Site.

In reference to the latter two items, the following should be evaluated:

- Detection groundwater monitoring systems previously installed under Project W-017 at the A-36B Crib, B Pond, Grout Treatment Facility, Low-level Burial Grounds, single-shell tanks, S-10 Ditch and Pond, and U-12 Crib
- Assessment monitoring systems installed at the 183-H Solar Evaporation Basin, 300 Area Process Trenches, 100 K Basins, and the 216-U-12 Crib
- *A Detection-Level Hazardous Waste Ground-Water Monitoring Compliance Plan for the 200 Areas Low-Level Burial Grounds and Retrievable Storage Units*, "Engineering Study," and Appendix C, "Well Specifications" (statement of work), U.S. Department of Energy, Richland Operations Office, February 1987, Appendix B
- *Installation of Groundwater Monitoring Wells in Support of the 100-K Fuel Storage Basins*, WHC-SD-EN-AP-153, Rev. 1, Westinghouse Hanford Company, May 1994.

This page intentionally left blank.

DISTRIBUTION SHEET

To	From	Page 1 of 1
Distribution	B. A. Williams	Date July 18, 1995
Project Title/Work Order		EDT No. N/A
Functional Design Criteria for FY 1993-2000 Groundwater Monitoring Wells		ECN No. 618187

Name	MSIN	Text With All Attach.	Text Only	Attach./ Appendix Only	EDT/ECN Only
M. R. Adams	H6-06	X			
D. M. Collado	A5-18	X			
D. G. Farwick	H4-16	X			
M. J. Furman	S7-55	X			
M. G. Gardner	S3-24	X			
D. J. Hart	T3-05	X			
J. F. Keller	L4-93	X			
J. R. Kelly	R3-28	X			
J. S. Schmid	H6-06	X			
W. R. Thackaberry	H6-32	X			
R. R. Thompson	H6-32	X			
W. E. Toebe	H6-22	X			
C. W. Walton	L4-01	X			
B. A. Williams	H6-06	X			
J. B. Witt	L4-93	X			
M. T. York	H6-32	X			
EDMC	H6-08	X			
Central Files	A3-88	X			