

Process Design and Economics for the Conversion of Lignocellulosic Biomass to Hydrocarbon Fuels

Fast Pyrolysis and Hydrotreating Bio-oil Pathway

November 2013

**Susanne Jones, Pimphan Meyer, Lesley Snowden-Swan,
Asanga Padmaperuma**
Pacific Northwest National Laboratory

Eric Tan, Abhijit Dutta
National Renewable Energy Laboratory

Jacob Jacobson, Kara Cafferty
Idaho National Laboratory

PNNL-23053
NREL/TP-5100-61178

Prepared for the U.S. Department of Energy Bioenergy Technologies Office

NOTICE

This report was prepared as an account of work sponsored by an agency of the United States government. Neither the United States government nor any agency thereof, nor the Alliance for Sustainable Energy, LLC, nor Battelle Memorial Institute, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States government or any agency thereof, or the Alliance for Sustainable Energy, LLC, or Battelle Memorial Institute.

Available electronically at <http://www.osti.gov/bridge>

Available for a processing fee to U.S. Department of Energy and its contractors, in paper, from:

U.S. Department of Energy
Office of Scientific and Technical Information
P.O. Box 62
Oak Ridge, TN 37831-0062
phone: 865.576.8401
fax: 865.576.5728
email: <mailto:reports@adonis.osti.gov>

Available for sale to the public, in paper, from:

U.S. Department of Commerce
National Technical Information Service
5285 Port Royal Road
Springfield, VA 22161
phone: 800.553.6847
fax: 703.605.6900
email: orders@ntis.fedworld.gov
online ordering: <http://www.ntis.gov/help/ordermethods.aspx>

Process Design and Economics for the Conversion of Lignocellulosic Biomass to Hydrocarbon Fuels

Fast Pyrolysis and Hydrotreating Bio-Oil Pathway

S Jones¹
P Meyer¹
L Snowden-Swan¹
A Padmaperuma¹

E Tan²
A Dutta²

J Jacobson³
K Cafferty³

November 2013

Pacific Northwest National Laboratory is operated by Battelle for the United States Department of Energy under contract DE-AC05-76RL01830.

NREL is a national laboratory of the U.S. Department of Energy, Office of Energy Efficiency & Renewable Energy, operated by the Alliance for Sustainable Energy, LLC, under contract DE-AC36-08GO28308.

INL is a national laboratory of the U.S. Department of Energy, Office of Energy Efficiency & Renewable Energy, Under DOE Idaho Operations Office Contract DE- AC07-05ID14517.

Prepared for the U.S. Department of Energy Bioenergy Technologies Office

¹ Pacific Northwest National Laboratory

² National Renewable Energy Laboratory

³ Idaho National Laboratory

Executive Summary

The goal of the U.S. Department of Energy's Bioenergy Technologies Office (BETO) is to enable the development of biomass technologies to:

- Reduce dependence on foreign oil
- Promote the use of diverse, domestic, and sustainable energy resource
- Establish a domestic bioenergy industry
- Reduce carbon emissions from energy production and consumption. (DOE 2013)

To meet these goals, the BETO promotes the development of liquid hydrocarbon fuels that can serve as gasoline, jet and diesel blendstocks.

This report describes a proposed thermochemical process for converting biomass into liquid transportation fuels via fast pyrolysis followed by hydroprocessing of the condensed pyrolysis oil. As such, the analysis does not reflect the current state of commercially-available technology but includes advancements that are likely, and targeted to be achieved by 2017. The purpose of this study is to quantify the economic impact of individual conversion targets to allow a focused effort towards achieving cost reductions.

The report updates a study published in 2009 (Jones 2009) using the most current publically available data from PNNL, NREL and others. The fast pyrolysis of biomass is already being commercialized, while the upgrading via bio-oil hydrotreating to transportation fuels has only been demonstrated in the laboratory and on a small engineering development scale. The pyrolysis oil upgrading via hydrotreating section is revised to incorporate the most recent improvements: a low temperature stabilizer reactor has been added ahead of the two-stage hydrotreaters described in the 2009 report. Capital and operating costs are updated to reflect the current understanding of the system.

The process presented here represents a conceptual design that considers the economics of gasoline and diesel blendstock production assuming the achievement of internal research targets for 2017 coupled with nth plant costs and financing. The assumed processing capacity is 2,205 U.S. tons (2,000 metric tons) per day of dry biomass and results in a fuel production yield of 40 gallons of gasoline per dry U.S. ton of biomass and 44 gallons of diesel per dry U.S. dry ton of biomass. Natural gas is used to generate a portion of the hydrogen needed for hydrotreating and electricity is purchased from the grid. The minimum combined gasoline and diesel blendstock fuel selling price is \$3.39 per gasoline gallon equivalent (lower heating value basis) in 2011 dollars.

Figure ES-1. Summary Economic Results

**Gasoline & Diesel Blendstocks from Biomass Pyrolysis and Upgrading
Conceptual Design Summary**

All Values in 2011\$

Minimum Fuel Selling Price (MFSP) \$3.34 \$/gallon gasoline blendstock
Minimum Fuel Selling Price (MFSP) \$3.71 \$/gallon diesel blendstock
MFSP - GGE Basis \$3.39 \$/gge total blendstocks

| | |
|-------------------------------------|----------------------------------|
| Gasoline Blendstock Production | 28.9 million gallons/year |
| Diesel Blendstock Production | 31.6 million gallons/year |
| Gasoline Blendstock Yield | 39.9 gallons/dry US ton wood |
| Diesel Blendstock Yield | 43.7 gallons/dry US ton wood |
| Total Blendstock Fuel Yield | 10.1 million BTU/dry US ton wood |
| Feedstock + Handling Cost | 80.00 \$/dry short ton feed |
| Internal Rate of Return (After-Tax) | 10% |
| Equity Percent of Total Investment | 40% |
| On-Stream Factor | 90% |

| Capital Costs | | |
|---|----------------------------|----------------------|
| A100 | Fast Pyrolysis & Quench | \$162,000,000 |
| A100 | Heat Recovery & Filtration | \$13,000,000 |
| A200 | Hydrotreating | \$115,000,000 |
| A300 - 500 | Product Finishing | \$19,000,000 |
| A600 | Hydrogen Generation | \$69,000,000 |
| A700 | Balance of Plant | \$9,000,000 |
| Total Installed Equipment Cost | | \$387,000,000 |
| Added Direct + Indirect Costs (% of TCI) | | \$313,600,000 45% |
| Total Capital Investment (TCI) | | \$700,600,000 |
| Performance | | |
| Installed Capital/Annual Gallon Blendstocks | | 6 |
| TCI/Annual Gallon Blendstocks | | 12 |
| Loan Rate | | 8.0% |
| Term (years) | | 10 |
| Capital Charge Factor (Computed) | | 0.128 |
| Plant Purchased Electricity (KWh/gal blendstocks) | | 1.27 |
| Water Usage (gallons/gal blendstocks) | | 1.49 |
| Natural Gas (scf/gal blendstocks) | | 20 |

| Manufacturing Costs (\$/GGE) | |
|---------------------------------|-------------|
| Feedstock + Handling | 0.92 |
| Natural Gas | 0.10 |
| Catalysts & Chemicals | 0.32 |
| Waste Disposal | 0.01 |
| Electricity and other utilities | 0.09 |
| Credits | 0.00 |
| Fixed Costs | 0.53 |
| Capital Depreciation | 0.35 |
| Average Income Tax | 0.10 |
| Average Return on Investment | 0.96 |
| | 3.39 |

| Manufacturing Costs (\$/yr) | |
|---------------------------------|--------------|
| Feedstock + Handling | \$57,900,000 |
| Natural Gas | \$6,200,000 |
| Catalysts & Chemicals | 20,400,000 |
| Waste Disposal | \$500,000 |
| Electricity and other utilities | \$5,500,000 |
| Credits | \$0 |
| Fixed Costs | \$33,600,000 |
| Capital Depreciation | \$22,200,000 |
| Average Income Tax | \$6,600,000 |
| Average Return on Investment | \$60,900,000 |

Abbreviations

| | | | |
|----------------|---|-----------------------|---|
| ASTM | American Society of Testing & Materials | LHSV | Liquid Hourly Space Velocity |
| BETO | Bioenergy Technologies Office | LHV | Lower Heating Value |
| BBL | Barrel (42 gallons) | LTS | Low Temperature Shift |
| BFW | Boiler Feed Water | MACRS | Modified Accelerated Cost Recovery System |
| BPSD | Barrels Per Stream Day | MFSP | Minimum Fuels Selling Price |
| BTU | British Thermal Units | MJ | Mega Joule |
| C&D | Construction and Demolition | MM | Million |
| CFB | Catalytic Fluidized Bed | mm | Millimeters |
| CoMo | Cobalt Molybdenum | MS | Mass Spectrometry |
| COD | Chemical Oxygen Demand | MYPP | Multi-Year Program Plant |
| CWS | Cooling Water Supply | NiMo | Nickel Molybdenum |
| CWR | Cooling Water Return | NO_x | Nitrogen Oxides |
| DOE | Department of Energy | NREL | National Renewable Energy Laboratory |
| DAF | Dry and Ash Free | PNNL | Pacific Northwest National Laboratory |
| EISA | Energy Independence and Security Act | PDU | Process Development Unit |
| EPA | Environmental Protection Agency | PSA | Pressure Swing Adsorption |
| GC | Gas Chromatography | RFS2 | Renewable Fuel Standard |
| GGE | Gasoline Gallons Equivalent | SCF | Standard Cubic Foot |
| GHG | Green House Gas | SCFD | Standard Cubic Foot per Day |
| GPD | Gallons Per Day | SCR | Steam-to-Carbon Ratio |
| GPM | Gallons Per Minute | SOT | State of Technology |
| HCK | Hydrocracking | SO_x | Sulfur Oxides |
| HDS | Hydrodesulfurization | TAN | Total Acid Number |
| HDO | Hydrodeoxygenation | TEA | Techno-Economic Analysis |
| HTS | High Temperature Shift | TIC | Total Installed Capital |
| INL | Idaho National Laboratory | Ton | U.S. ton (2000 pounds) |
| IRR | Internal Rate of Return | TPEC | Total Purchased Equipment Cost |
| kWh | Kilowatt Hour | VOC | Volatile Organic Carbon |
| lb | Pound | WGS | Water Gas Shift |
| LCA | Life Cycle Analysis | YR | Year |

Contents

| | |
|---|----|
| Executive Summary | iv |
| Abbreviations | vi |
| 1. Introduction | 1 |
| 1.1. Approach | 1 |
| 1.2. Definition of n th Plant | 2 |
| 1.3. Cost Estimation Basis | 3 |
| 2. Plant Design Overview | 4 |
| 2.1. Feedstock and Plant Size | 4 |
| 2.2. Conversion Summary | 4 |
| 3. Process Design and Cost Estimation | 6 |
| 3.1. Feedstock Logistics, Handling and Drying | 6 |
| 3.2. Area 100: Fast Pyrolysis | 7 |
| 3.2.1. Fast Pyrolysis Design Basis | 10 |
| 3.2.2. Fast Pyrolysis Cost Estimation | 11 |
| 3.3. Area 200: Hydrotreating to Hydrocarbons | 11 |
| 3.3.1. Hydrotreating to Hydrocarbons Design Basis | 16 |
| 3.3.2. Hydrotreating Cost Estimation | 16 |
| 3.4. Area 300: Product Recovery and Area 500: Hydrocracking | 17 |
| 3.4.1. Hydrocracking and Product Separation Design Basis | 18 |
| 3.4.2. Hydrocracking and Product Cost Estimation | 18 |
| 3.5. Area 600: Hydrogen Production | 19 |
| 3.5.1. Base Case: Conventional Hydrogen Generation | 19 |
| 3.5.2. Hydrogen Generation Design Basis | 20 |
| 3.5.3. Hydrogen Generation Cost Estimation | 20 |
| 3.6. Balance of Plant | 21 |
| 4. Process Economics | 23 |
| 4.1. Operating Costs | 23 |
| 4.2. Fixed Capital Investment | 24 |
| 4.3. Minimum Fuel Selling Price | 25 |
| 5. Economic and Technical Sensitivities | 26 |
| 5.1. Alternate H ₂ Production Scenario: Fluidized Bed Reformer | 26 |
| 5.1.1. Fluidized Bed Reformer Design Basis | 27 |
| 5.1.2. Fluidized Bed Reformer Cost Estimate | 27 |
| 5.2. High Ash Feedstock Scenario | 28 |
| 5.3. Additional Technical and Financial Sensitivities | 29 |
| 6. Environmental Sustainability Metrics | 31 |
| 6.1. Greenhouse Gas Emissions and Fossil Energy Use | 32 |

| | | |
|-----|--|----|
| 6.2 | Fuel Yield and Biomass Carbon-to-Fuel Efficiency | 34 |
| 6.3 | Water Consumption and Wastewater Generation | 35 |
| 6.4 | Metrics for High Ash Content Scenario | 36 |
| 7. | Conclusions and Recommendations | 39 |
| 8. | References | 41 |
| | Appendix A: Base Case Heat and Material Balances | 47 |
| | Appendix B: Base Case Individual Equipment Cost Summary and Specifications | 61 |
| | Appendix C: Base Case Process Parameters and Operation | 66 |
| | Appendix D1: CFB Reformer Heat and Material Balances | 68 |
| | Appendix D2: CFB Reformer Capital and Operating Costs | 70 |
| | Appendix E: Feedstock Supply | 72 |
| | Appendix F: Compound Selection | 78 |
| | Appendix G: Indices | 86 |

Figures

| | | |
|--|---|----|
| | Figure ES-1. Summary Economic Results | v |
| | Figure 3. Feed Handling and Drying Process Flow | 7 |
| | Figure 4. Fast Pyrolysis Process Flow | 9 |
| | Figure 5. Examples of Hydrotreating Reactions | 12 |
| | Figure 6. Reactivity Scale of Oxygenated Groups under Hydrotreatment Conditions | 13 |
| | Figure 7. Bio-Oil Upgrading Process Flow | 14 |
| | Figure 8. Hydrocracking and Product Recovery Process Flow | 17 |
| | Figure 9. Hydrogen Production Process Flow | 19 |
| | Figure 10. Carbon Content of HDO Aqueous Phase | 22 |
| | Figure 11. Sensitivity Analysis Results | 29 |
| | Figure 12. Contributing Processes to Conversion GHGs for Fast Pyrolysis and Upgrading | 33 |
| | Figure 13. Life Cycle GHG Emissions for Fuel from Fast Pyrolysis and Bio-oil Upgrading of Southern Pine and Forest Residue | 34 |
| | Figure 14. Contributing Processes for Consumptive Water Use for Fast Pyrolysis and Upgrading | 35 |
| | Figure 15. Effect of Biomass Ash Content on Conversion GHGs | 37 |
| | Figure 16. Effect of Biomass Ash Content on Lifecycle GHGs (for pine feedstock) | 38 |
| | Figure E-1. Wood Biomass Feedstock Supply System | 73 |
| | Figure E-2. Example of the Spatial and Temporal Variability of Corn Stover Characteristics such as % Ash Content, % Glucan Content and % Xylan. | 75 |
| | Figure F-1. Hydrotreated Oil Distillation Curve by ASTM D2887 | 84 |

Tables

| | |
|--|----|
| Table 1. N th Plant Assumptions..... | 2 |
| Table 2. Feedstock and Processing Assumptions | 4 |
| Table 3. The Effect of Feed Type and Ash on Fast Pyrolysis Oil Yield (Oasmaa 2010) | 6 |
| Table 4. Costs and Specifications for Woody Feedstocks and Blends | 6 |
| Table 5. Fast Pyrolysis Modeled Yields | 10 |
| Table 6. Area 100 Design Basis..... | 11 |
| Table 7. Catalysts for Bio-Oil Hydrotreating (Wang 2013) | 14 |
| Table 8. Design Basis for Area 200..... | 16 |
| Table 9. Hydrotreating Area Capital Costs..... | 17 |
| Table 10. Areas 300 and 500 Design Basis | 18 |
| Table 11. Hydrocracking and Product Separation Capital Costs..... | 18 |
| Table 12. Area 600 Design Basis..... | 20 |
| Table 13. Process Water Demands | 21 |
| Table 14. Variable Operating Cost Assumptions..... | 23 |
| Table 15. Fixed Operating Costs and Assumptions..... | 24 |
| Table 16. Total Project Investment..... | 25 |
| Table 17. Design Performance for the Reforming Catalyst (Dutta 2011, Dutta 2013)..... | 27 |
| Table 18. Comparison of Hydrogen Generation Scenarios | 28 |
| Table 19. Effect of Higher Ash Biomass | 28 |
| Table 20. Sustainability Metrics for Fast Pyrolysis and Upgrading | 31 |
| Table 21. Data Sources and Assumptions for Fuel Life Cycle GHG Analysis | 33 |
| Table 22. Effect of Higher Ash on Sustainability Metrics for Fast Pyrolysis and Upgrading..... | 36 |
| Table D-1. Capital Cost Estimate for Fluidized Bed Reformer (2011 k\$). | 70 |
| Table D-2. Variable Operating Costs..... | 71 |
| Table D-3. Feed and Utilities..... | 71 |
| Table E-1. Example of Variability in Corn Stover Composition..... | 73 |
| Table E-2. Potential Increase in Volume of Biomass Available as a Result of Blending Biomass at an Example Grower Payment of \$40/dry ton (KDF 2013). | 74 |
| Table E-3. List of Costs and Specifications for Woody Feedstocks and Blends for Thermochemical Conversion | 77 |
| Table F-1. Example Chemical Types in Pine Bio-oil | 78 |
| Table F-2. Model Compounds Used to Represent Bio-oil..... | 79 |
| Table F-3. Molecular Structures, and Physical and Chemical Properties for User Defined Compounds | 80 |
| Table F-4. Characteristics of Solid Char from Fast Pyrolysis | 81 |
| Table F-5. Model Compounds Representing Mild Hydrotreating Products | 82 |
| Table F-6. Upgraded Oil Model Compounds | 83 |

| | |
|---|----|
| Table F-7. Hydrotreated Oil Element Balances and Properties | 83 |
| Table F-8. Model Compounds and Their Generic Names | 85 |
| Table G-1 Labor Indices | 86 |
| Table G-2 Capital Cost Indices | 86 |
| Table G-3 Inorganic Chemical Indices | 86 |

1. Introduction

The goal of the Bioenergy Technologies Office (BETO), as stated in the Multi-Year Program Plan (MYPP), is to enable the development of biomass technologies to:

- Reduce dependence on foreign oil
- Promote the use of diverse, domestic, and sustainable energy resource
- Establish a domestic bioenergy industry
- Reduce carbon emissions from energy production and consumption (DOE 2013).

In recent years, BETO completed a number of techno-economic evaluations of both biological and thermochemical pathways for converting biomass to fuels. These evaluations, termed “design cases”, provide a detailed basis for understanding the potential of various conversion technologies and help identify technical barriers where research and development could potentially lead to significant cost improvements. Consistent assumptions for items such as plant lifetimes, rates of return, and other factors were used in all cases so the various conversion pathways could be assessed on a comparative basis.

The purpose of this report is to evaluate the conversion of biomass into infrastructure-compatible hydrocarbon fuels via fast pyrolysis followed by the catalytic upgrading of condensed pyrolysis vapors. This report builds upon the 2009 design report (Jones 2009) and is updated with the most recent laboratory and commercial data. The pathway presented here represents a goal case targeting performance potentially available between now and 2017. The fast pyrolysis of biomass is already being commercialized, while the upgrading of the bio-oil to transportation fuels has only been demonstrated in the laboratory and on a small engineering development scale. As such, the analysis does not reflect the current state of commercially-available technology but includes advancements that are likely, and targeted to be achieved by 2017.

This report also provides the basis for the annual technical and economic goals leading to the overall BETO programmatic 2017 cost target of \$3/gasoline gallon equivalent (gge) fuel. Research improvements will be incorporated into the models and reported in the annual state of technology assessments (Jones 2012, Jones 2013) then compared to the conversion goals set forth in this report.

1.1. Approach

The approach to developing techno-economics is similar to that employed in previous conceptual conversion pathways and associated design reports produced for BETO (Aden 2002, Spath 2005, Phillips 2007, Jones 2009, Dutta 2011, Humbird 2011). Process flow diagrams and models are based on research results from completed and ongoing research at PNNL, NREL and INL, other research organizations, as well as information from commercial vendors for mature and similar technologies. The process models are developed using commercial process flow simulation software tools such as CHEMCAD (Chemstations 2013) and Aspen Plus (Aspentech 2013). The heat and material balances from the simulation models are used to estimate the capital and operating costs. These are then assembled in a Microsoft Excel[®] spreadsheet employing a discounted cash flow analysis to estimate the minimum product selling price.

This approach is summarized in Figure 1:

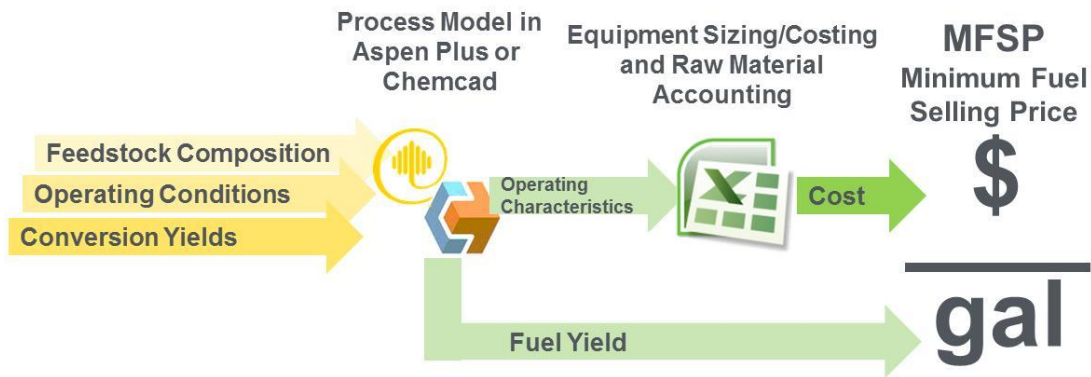


Figure 1. Techno-Economic Analysis Approach

1.2. Definition of nth Plant

A standard reference basis common to the BETO reports, known as the “nth” plant design is used. These assumptions do not account for additional first of a kind plant costs, including special financing, equipment redundancies, large contingencies and longer startup times necessary for the first few plants. For nth plant designs, it is assumed that the costs reflect a future time when the technology is mature and several plants have already been built and are operating. The specific assumptions are shown in Table 1.

Table 1. Nth Plant Assumptions

| Assumption Description | Assumed Value |
|----------------------------------|---|
| Internal rate of return | 10% |
| Plant financing debt/equity | 60% / 40% of total capital investment |
| Plant life | 30 years |
| Income tax rate | 35% |
| Interest rate for debt financing | 8.0% annually |
| Term for debt financing | 10 years |
| Working capital cost | 5.0% of fixed capital investment (excluding land) |
| Depreciation schedule | 7-years MACRS ¹ schedule |
| Construction period | 3 years (8% 1 st yr, 60% 2 nd yr, 32% 3 rd yr) |
| Plant salvage value | No value |
| Startup time | 6 months |
| Revenue and costs during startup | Revenue = 50% of normal Variable costs = 75% of normal Fixed costs = 100% of normal |
| On-stream factor | 90% (7884 operating hours per year) |

¹ Modified Accelerated Cost Recovery System

1.3. Cost Estimation Basis

All costs in this report are on a 2011 constant dollar basis. This is the current reference year that the BETO uses to facilitate comparison of various conversion technologies (DOE 2013). Indices used to convert capital and operating costs to the 2011 dollars can be found in Appendix G.

Capital costs are estimated from a variety of resources. The heat and material balances generated by the simulation software (CHEMCAD or Aspen Plus) are used to size the major pieces of equipment. These are input into Aspen Capital Cost Estimator software (reported in 1st quarter 2011 costs) to determine the installed capital cost. In addition, select data from commercial vendors, either as budgetary estimates or from their published literature are used when available.

The original cost reflects the year of the cost quote or estimate, and the scale of the equipment. All capital costs are adjusted to an annualized 2011 basis using the Chemical Engineering magazine's published indices:

$$\text{Cost in 2011 \$} = \text{Equipment cost in quote year} \times \left(\frac{\text{2011 index} = 585.7}{\text{Quote cost year index}} \right)$$

The scale is adjusted to match the appropriate scaling term (heat exchanger area for example) by using the following expression:

$$\text{Current equipment cost} = \text{Cost at original scale} \times \left(\frac{\text{Current capacity}}{\text{Original capacity}} \right)^n$$

Where 'n' is the scale factor, typically, 0.6 to 0.7.

Once the equipment is scaled and adjusted to the common cost year, factors are applied to calculate the total capital investment. Individual installation factors calculated by Aspen Capital Cost Estimator are multiplied by equipment costs, unless installed costs are already available from vendors. The total direct cost is the sum of all the installed equipment costs, plus the costs for buildings, additional piping and site development (calculated as 4%, 4.5% and 10% of purchased equipment, respectively). Indirect costs are estimated as 60% of the total installed costs. The sum of the direct and indirect costs is the total capital investment.

2. Plant Design Overview

This section describes the basis for the plant scale, feedstock type and general characteristics of the conversion units.

2.1. Feedstock and Plant Size

The feedstock is a low ash, woody biomass delivered at 30 wt% moisture. The feedstock cost includes the capital and operating costs for drying biomass to 10 wt% moisture and grinding to 2-6 mm. The ultimate analysis for the feedstock is presented in Table 2. Process heat is provided by the conversion plant to dry the biomass from 30 wt% to 10 wt% moisture.

Table 2. Feedstock and Processing Assumptions

| Component | Weight % (dry basis) |
|------------------------|------------------------|
| Carbon | 50.94 |
| Hydrogen | 6.04 |
| Nitrogen | 0.17 |
| Sulfur | 0.03 |
| Oxygen | 41.90 |
| Ash | 0.9 |
| Heating value (Btu/lb) | 8,601 HHV 7,996 LHV |

The plant capacity is 2205 dry U.S. tons per day (2000 metric tons per day) of bone dry wood. Hereafter, all references to tons in this report refer to U.S. tons (2000 pounds).

2.2. Conversion Summary

A simplified block diagram of the overall design is given in Figure 2. The major processing areas are as follows:

Area 100 Fast Pyrolysis: biomass is heated to approximately 932°F (500°C) in less than two seconds at atmospheric pressure, and then rapidly cooled to stop the reaction. The cooled pyrolysis products are primarily liquid (water and organic compounds). Solid char mixed with biomass ash, and non-condensable gases are also produced.

Area 200 Hydrotreating: the fast pyrolysis liquid product or bio-oil is deoxygenated by catalytic hydrotreating at elevated pressures in an excess of hydrogen. Multiple fixed bed reactors are used with a staged increase in processing severity with each reactor in order to reduce overall coking. The upgraded oil is deoxygenated to less than 2 wt% oxygen.

Area 300 Product Separation: the wide boiling range finished oils from hydrotreating and hydrocracking are fractionated into gasoline and diesel boiling range blendstocks.

Area 400 Fuel Gas Collection: off-gas from fast pyrolysis and the upgrading sections are collected and routed to the hydrogen plant and to process heaters.

Area 500: Hydrocracking: the heavy hydrocarbon fraction from the hydrotreated oil is cracked to additional gasoline and diesel blendstocks in a reactor system similar to that used in conventional refineries.

Area 600 Steam Reforming: hydrogen for hydrotreating is produced by steam reforming of natural gas mixed with the off-gases from the hydrotreater and pyrolysis reactor.

Balance of Plant: Wastewater treatment, cooling water, tank farm, and flare are included in this section.

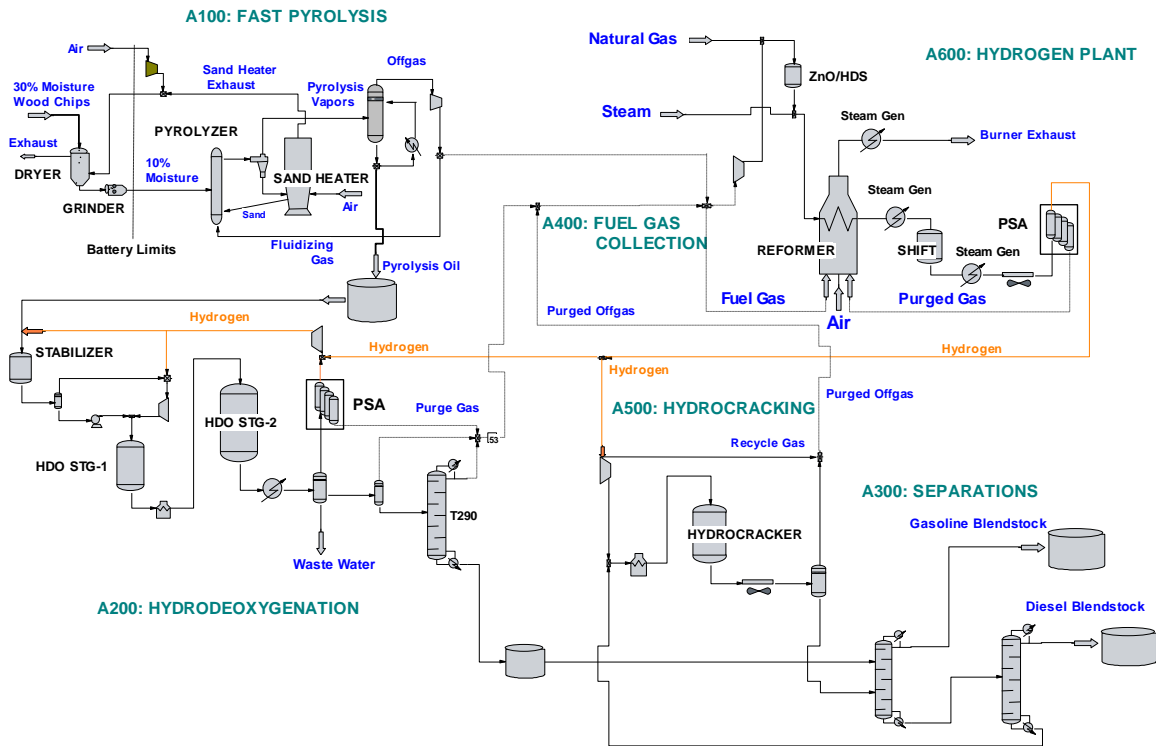


Figure 2. Simplified Flow Diagram for the Overall Process

3. Process Design and Cost Estimation

The standalone biorefinery is assumed to include feedstock reception, fast pyrolysis, hydrotreating and hydrocracking of pyrolysis oil, separation of upgraded oil to gasoline and diesel fuel blendstocks, and hydrogen generation. Process utilities include cooling water, on-site generated steam and electricity, and purchased electricity.

3.1. Feedstock Logistics, Handling and Drying

Woody feedstock is brought from the field to the conversion plant to meet a specific set of requirements. The details of the feedstock logistics and the rationale for the feedstock cost and specifications are provided by the Idaho National Laboratory (INL) and are summarized in Appendix E. Forest thinnings and logging residues and construction and demolition (C&D) wastes are low cost resources to procure, but also have unfavorable quality specifications, specifically high ash content. The ash type and quantity will have an effect on the yield of fast pyrolysis oil as certain ash constituents can cause an increase in the gas production at the expense of condensable liquid (Table 3).

Table 3. The Effect of Feed Type and Ash on Fast Pyrolysis Oil Yield (Oasmaa 2010)

| Feedstock 3-5mm, 7% moisture | % Ash (dry basis) | Organic Yield wt% on Dry Feed |
|---|------------------------------|--|
| Pine (20 kg/h PDU) | 0.1wt% | 64% |
| Pine (300 kg/h unit) | 0.1wt% | 62% |
| Forest Residues | 2 – 4 wt% | 46 – 55% |
| Straws & Hay | 3 – 6 wt% | 36 – 45% |

Because these biomass resources are low cost, supply chains that include active ash management preprocessing unit operations can be purchased. Prior to preprocessing, certain resources can be blended to reduce the overall percentage of ash and moisture, thereby reducing the costs and severity needed to reduce the ash to in-feed specifications. Table 4 shows an example formulation.

Table 4. Costs and Specifications for Woody Feedstocks and Blends

| Feedstock | Reactor Throat Feedstock Cost (\$/dry ton)² | Formulation Fraction (%) | % Ash Delivered to Throat of Conversion Reactor |
|-------------------------------|---|-------------------------------------|--|
| Pulp | 99.38 | 30 | 0.5 |
| Logging Residues ¹ | 74.83 | 35 | 1.5 |
| Switchgrass | 80.54 | 10 | 2.8 |
| C&D Wastes | 63.77 | 25 | 0.5 |
| Formulation Totals | 80.00 | 100 | 1.1 |

¹ residues do not include costs for harvest and collection; they are moved to landing while attached to the merchantable portion of the tree (for example, timber or pulpwood)

² includes ash mitigation

The C&D wastes are incorporated because of its low access fee cost and its low ash content. This is only an example; the actual blends will be regionally based designs that take advantage of local feedstocks and their biomass characteristics. Additionally the ability to blend feedstocks to a specification has the potential to reduce some of the risks associated with the seasonality of feedstocks.

Currently, the forest thinnings and logging residues are both reduced to 1.05% ash after a chemical pretreatment. C&D wastes will undergo a low severity pretreatment and the ash content will be reduced to 0.9%. The purpose grown pine is debarked and chipped at the landing resulting in an ash content of 0.5%. The blended material will be delivered to the conversion facility a 2 wt% ash. A further pretreatment operation will be performed on the blended material that will reduce the ash to the required 0.9%. It is important that the pretreatment operation be inexpensive or offset the costs by improving other operations, such as conversion yields, decrease grinding or pelletizing costs. There are a number of chemical pretreatment options being explored that will reduce the ash. INL is focusing on these pretreatment technologies but the goal is to meet both the \$80 per short ton cost target and 0.9% ash specifications assumed in this report.

Blended woody feedstock is supplied as shown in Figure 3. Although in this report the heat for biomass drying is supplied from the conversion plant, future feedstock supplies will be dried at the depot using a local heat source.

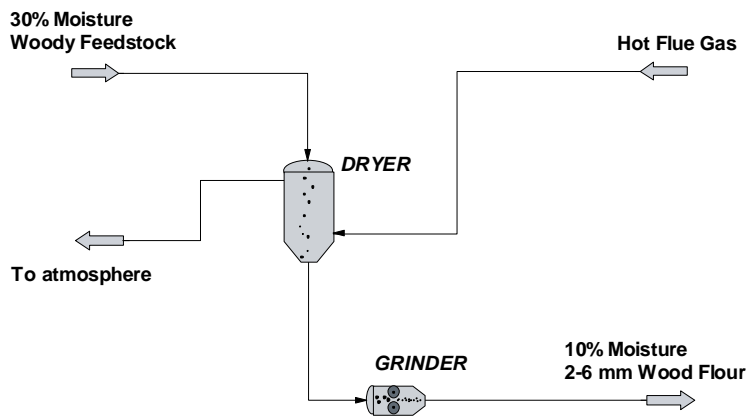


Figure 2. Feed Handling and Drying Process Flow

The feedstock is dried from 30 wt% (as received) to 10 wt% moisture content using hot flue gas from the pyrolysis reactor char combustor. The combustion exhaust is fed to the dryer at 584°F (307°C) with an oxygen content of approximately 5-10% by volume to avoid feedstock combustion (Searcy 2010). The flue gas temperature must be higher than the water dew point to avoid any corrosion and low enough to avoid combustion. The flue gas temperature is adjusted by cooling and air makeup before being fed to the dryer. After the drying step, the feedstock is ground to 2-6 mm particle size to yield sufficiently small particles, ensuring rapid reaction in the pyrolysis reactor.

3.2. Area 100: Fast Pyrolysis

Pyrolysis is the thermal decomposition of carbonaceous material in the absence of oxygen to produce solid char, gas, and a liquid product. Residence times for fast pyrolysis are on the order of seconds (Basu

2010). After rapidly quenching the pyrolysis vapors and aerosols, three product phases are formed. The yields of each phase depend on the operating conditions, reactor design and feedstock characteristics, including ash content and the relative amounts of cellulose and lignin. The products are:

Fast pyrolysis liquid: (also known as bio-oil and pyrolysis oil) is obtained after vapor condensation. Bio-oil is black or dark brown and free flowing at room temperature and typically contains less than 30% of water and hundreds of oxygenated components (Elliott 2013). It is mostly immiscible in hydrocarbon liquids and can be upgraded by hydrotreating to lower the oxygen content and decrease hydrophilicity.

Solid char: is primarily composed of carbon. It is separated from the fast pyrolysis vapors and aerosols by cyclone. This solid product can be used as fuel.

Non-condensable gas: is collected during vapor condensation. The gas is recycled internally as fluidizing gas for the fast pyrolysis reactor and/or collected for fuel use.

There are several types of pyrolysis reactor configurations:

- *Ablative pyrolysis:* Mechanical pressure is used to press biomass against a heated reactor wall, essentially melting the biomass and evaporating the resulting vapors. The two main advantages compared to other reactor types are that inert gas is not required and larger feedstock particles can be used. However, scaling is a linear function of the heat transfer area and does not benefit from the same economies of scale as the other systems. The system is also slightly more complex due to the mechanical nature of the process (IEA 2007). The PYTEC system in Germany produces approximately 4.4 tons per day of pyrolysis oil (Meier 2013).
- *Auger Pyrolysis:* This reactor uses a screw to mix a heat carrier and biomass, and is typically limited in size and potential to scale-up. Karlsruhe Institute of Technology has developed a 13.2 tons per day twin-screw mixing pyrolysis reactor (Bioliq 2013). It is designed to produce a slurry mixture of bio-oil and char that can be transported to a centralized gasification and Fischer-Tropsch plant.
- *Entrained Flow Pyrolysis:* This reactor configuration is popular for studies of thermochemical conversion kinetics and investigations of pressure effects. Feed material is typically fed into the top of the reactor, co-current with a gas stream. The flow through this configuration is assumed to approximate plug flow, with residence time controlled by the length of the heated zone. Char buildup and inefficient heat transfer can be a troublesome tradeoff for these simple and inexpensive reactors. Liquid yields are usually lower than fluid bed systems (Bridgwater 2008).
- *Rotating Cone:* This reactor combines biomass and hot sand at the bottom of the vessel and mixes the solids using a rotating cone inside the vessel. Hot pyrolysis oil vapors leave near the top of the reactor and are passed through several cyclones to remove fine particles before being condensed by direct contact with recirculating cooled oil. No carrier gas is needed, resulting in smaller downstream equipment. A 2.2 ton per day plant operating on palm oil empty fruit bunches was commissioned in Malaysia in 2006 and a 5.5 ton per day plant is in development (BTG 2013).
- *Bubbling Fluidized Bed Pyrolysis:* Here, biomass is introduced to hot sand fluidized by recirculated product gas. This technology is well understood, simple to construct, can operate on large scales, and is very efficient in transferring heat to the biomass, resulting in high liquid yields. Small biomass particle sizes are required in order to obtain high heating rates (Bridgwater 2008).

Reported char combustor temperatures are in the range of 1171°F (633°C) (Coll’Energia 2013) to 1400°F (760°C) (Trebbi 1997). The sand temperature is assumed to be the same as the char combustor operating temperature which is high enough to increase the reactor inlet temperature (dried feedstock + fluidized gas + sand) to 932°F (500°C). Silicon dioxide is used to represent sand as the heat carrier in the simulation. The sand to biomass weight ratio is reported to be in the range of 10-20 and the fluidization gas to biomass weight ratio is in the range of 2-9, with the exact conditions dictated by process conditions and the reactor design (Freel 1998, Peacocke 1997, Solantausta 2003).

Fast pyrolysis product yields have been published for various feedstock types (Oasmaa 2010). Fast pyrolysis liquid contains some solids such as residual sand and char which must be removed before hydrotreating. Filtering removes the solids as a mixture of oils and solids. A possible use for the filter retentate includes burning it for power generation or feeding it back to the fast pyrolysis reactor (Frey 2012). For this design, the bio-oil filter retentate is assumed to be burned in the sand heater. The assumptions used to determine the yields of model compounds representing pyrolysis oil are described in detail in Appendix F.

3.2.1. Fast Pyrolysis Design Basis

The model assumptions are shown in Table 5.

Table 5. Fast Pyrolysis Modeled Yields

| Product | Property or compound | Base Case Assumption | Typical Values (IEA 2007) |
|-----------------------|------------------------------|--|------------------------------|
| Oil | Weight % of dry biomass | 64 wt% in the reactor 62 wt% after filtration | 55 – 65 wt% for low ash feed |
| | Carbon, wt% DAF ¹ | 56.61 wt% | 56% |
| | Hydrogen, wt% DAF | 6.61 wt% | 6.5% |
| | Oxygen, wt% DAF | 36.77 wt% | 37.5% |
| | HHV, MJ/kg | 16.9 | 17 |
| | Density, g/ml | 1.2 | 1.2 |
| Reaction water | Weight % of dry biomass | 12 wt% | 5 – 12 wt% |
| Char & ash | Weight % of dry biomass | 12 wt% | 12 – 16 wt% |
| Gas | Weight % of dry biomass | 12 wt% | 12 – 16 wt % |
| | CO | 46 wt% of gas | |
| | CO ₂ | 43 wt% of gas | |
| | CH ₄ | 6 wt% of gas | |
| | C ₂ + | 5 wt% of gas | |
| | H ₂ | <1 wt% of gas | |

¹ DAF = dry ash free

The design basis for the biomass dryer, fast pyrolysis reactor and char combustor are presented in Table 6. The hot air flow rate and temperature to the dryer is based on discussions with INL regarding the dryer operation.

Table 6. Area 100 Design Basis

| Process | Assumption |
|---|-----------------------|
| Biomass Drying – Flue gas to dryer | |
| Flue gas exiting sand heater | 1128°F (609°C) |
| Flue gas plus additional air rate | 572,700 lb/h |
| Flue gas + added air temperature at dryer inlet | 584°F (307°C) |
| Flue gas + added air oxygen content | 10% maximum by volume |
| Fast Pyrolysis Reactor | |
| Sand to biomass ratio | 14.5 wt/wt |
| Fluidized gas to biomass ratio | 3 wt/wt |
| Hot Sand temperature | 1128°F (609°C) |
| Reactor inlet temperature | 932°F (500°C) |
| Heat loss | 1% of biomass LHV |
| Char Combustor | |
| Excess oxygen | 20% |
| Temperature | 1129°F (609°C) |
| Heat loss | 1% of biomass LHV |
| Cold Filter | |
| Cold filter bio-oil loss | 2 wt% of dry biomass |

3.2.2. Fast Pyrolysis Cost Estimation

The capital costs used are based on published inside battery limit costs for a 440 tons dry biomass per day commercial unit of \$38 million \pm 40% excluding front-end material handling, utilities, offsite requirements, product storage, foundations, site preparation, buildings, spares, safety containment, fire water systems, wastewater system, startup fuel systems, emissions control, and installation (Envergent 2009). It is assumed that the n^{th} plant cost for this unit will scale to 1100 tons per day and that two 1100 ton per day units are used in parallel. A budgetary estimate for a cold filter was obtained from the Pall Corporation. Costs for the air compressor and heat recovery were estimated using Aspen Capital Cost Estimator (Aspentech 2013). These costs are detailed in Appendix B.

3.3. Area 200: Hydrotreating to Hydrocarbons


Hydrodeoxygenation can stabilize bio-oil and convert it to a conventional hydrocarbon fuel. Hydrocarbon hydrotreating to remove nitrogen and sulfur is a common and well established refinery process (Al Sabawi 2012). However, oxygen removal on the scale needed to upgrade pyrolysis oil is much less developed. Bio-oil hydrotreating involves contacting the bio-oil with a large excess of hydrogen and produces gas and two liquid fractions. The compounds in the gas product are light hydrocarbons and carbon dioxide (Elliott 2012). The liquid products consist of hydrocarbon oil and an aqueous phase, which separate easily. The aqueous phase carbon content depends upon the degree of bio-oil deoxygenation. The hydrocarbon oil yield and quality is dependent on catalyst selection, reactor configuration and hydrotreating conditions. Fixed bed reactors similar to the ones used in conventional hydroprocessing of petroleum to finished fuels can be used. An alternate reactor configuration, known as an ebullated bed, is also under development at the bench scale for this application (Elliott 2013). The

ebullated bed is a liquid phase fluidization reactor using the dilute phase and the agitation of catalyst particles to eliminate the possibility of plugging the catalyst bed. The degree of the deoxygenation in the ebullated bed, however, is not expected to be as high as in the fixed bed. Fixed bed reactors are assumed in this study.

Single-stage hydrotreating has proved to be difficult, producing a heavy, tar-like product. Multi-stage processing, where mild hydrotreating is followed by more severe hydrotreating, has been found to overcome the reactivity of the bio-oil and prevent catalyst coking (Elliott 2007). Low temperature hydroprocessing can be used to pretreat the unstable bio-oil in order to reduce the most reactive oxygenated compounds before completely deoxygenating the oil under more severe hydrotreating conditions (higher temperature, lower space velocity) (Elliott 2013).


Chemical reactions during bio-oil hydrotreating are very complex. Overall, pyrolysis oil is almost completely deoxygenated by a combination of hydrodeoxygenation and decarboxylation, with oxygen removed in the form of water and carbon oxides. Example reactions are shown in Figure 5 taken from Zacher et al. (2013):

Hydrogenation




Oxygen Removal:

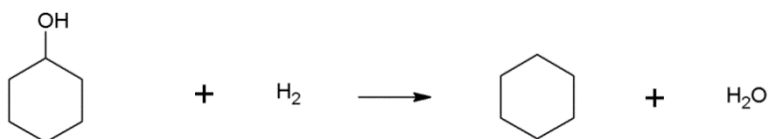Hydrodeoxygenation




/Dehydration

Decarbonylation




Decarboxylation



Fragmentation:

Cracking



Hydrocracking




Figure 4. Examples of Hydrotreating Reactions

The reactivities of oxygenated compounds in bio-oil in the presence of catalysts are known to depend on the processing temperature. A hydrotreatment reactivity scale for various bio-oil oxygenated groups developed by E. Laurent is shown in Figure 6 (reprinted with permission from Elliott 2007).

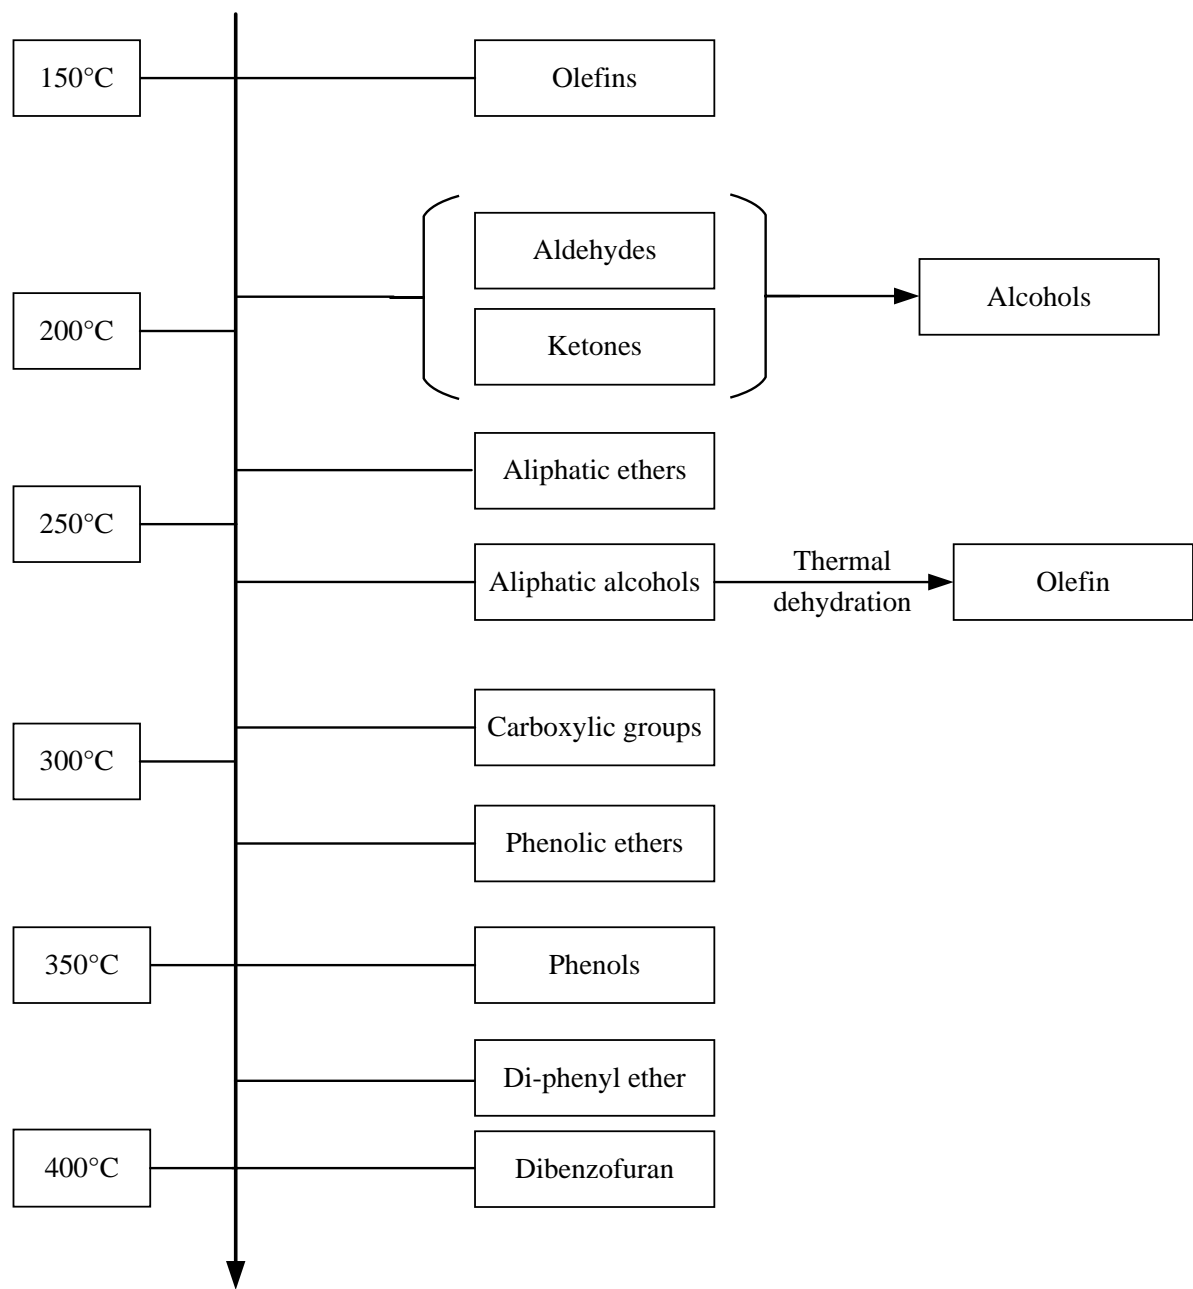


Figure 5. Reactivity Scale of Oxygenated Groups under Hydrotreatment Conditions

Proper selection of hydrotreating catalysts and optimum operating conditions can help control reaction selectivity and minimize hydrogen consumption. Several types of catalysts for bio-oil upgrading have been studied (Elliott 2007, Wang 2013). A recent study by Wang (2013) reviews hydrotreating of pyrolysis oil and model compounds; catalysts types tested are shown in Table 7.

Table 7. Catalysts for Bio-Oil Hydrotreating (Wang 2013)

| Catalog | Catalysts |
|-------------------------------|---|
| Mo-based sulfides | Bulk or supported MoS ₂ , Ni-MoS ₂ , Co-MoS ₂ |
| Noble metals | Supported Ru, Rh, Pd, Pt, Re, Pt-Rh, Pd-Rh, Pd-Cu, Pd-Fe, Pr-Re, Ru-Mo; Ru, Pt, Ph nanoparticles |
| Base metals | Supported Cu, Ni, Ni-Cu, Ni-Fe and Raney nickel |
| Metal phosphides | Supported Ni ₂ P, MoP, CoMoP, Fe ₂ P, WP and RuP |
| Other metal catalysts | Bulk Ni-Mo-B, supported nitrides (Mo ₂ N) and carbides, (Mo ₂ C); supported Mo-based oxide (MoO ₂), MoO ₃) |
| Bifunctional catalysts | Noble metal or base metal catalysts with aqueous acid including CH ₃ COOH, H ₂ PO ₄ , and Nafion or solid acid including HZSM-5, H-Beta, H-Y, sulfated zirconia and supported Nafion; metals including Pt, Pd and Ni supported on acid solid including HZSM-5, H-Beta, Hy and bulk acidic salt |

The filtered bio-oil product from the pyrolysis unit is pumped to high pressure, then combined with compressed hydrogen and preheated. The primary objective of this section is to upgrade bio-oil to infrastructure-compatible fuels. Single-stage hydrotreating of bio-oil produces a tar-like product (Elliott 2007); in addition, the catalyst life is short as raw bio-oil is a mixture of reactive oxygenated compounds and is thermally unstable. Accordingly, the upgrading process is performed in multi-stage fashion with increased processing severity in each subsequent stage, as shown in Figure 7.

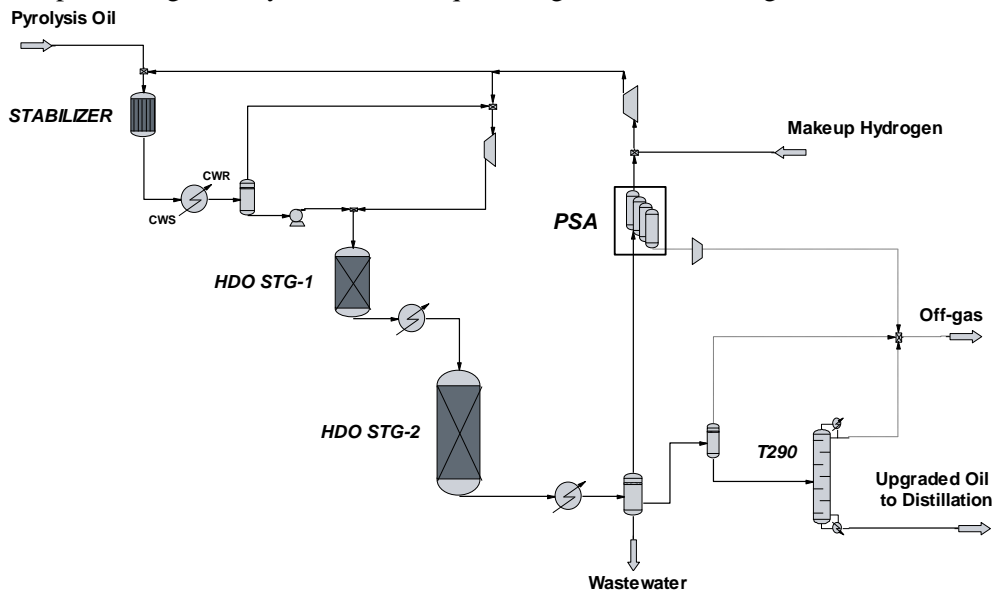


Figure 6. Bio-Oil Upgrading Process Flow

Bio-oil is first pretreated in a stabilization bed under relatively mild process conditions, 284 to 356°F (140 to 180°C) and 1200 psia, followed by processing under more severe hydrotreating conditions in the 1st and 2nd stage hydrotreating reactors (Jones 2013). The 1st stage hydrotreating reactor is designed as a single bed catalytic reactor operated at 356 to 482°F (180 to 250°C) and 2000 psia. The 2nd stage hydrotreating reactor is operated at a higher temperature of 662 to 797°F (350 to 425°C).

Limited data are available to understand the conversion products from the stabilizer and the first stage reactor. Detailed product analysis is needed to understand what compounds are being formed and which are disappearing. For model development purposes, reactions and intermediate products from the stabilization bed and the 1st stage hydrotreating reactor are estimated based on the reactivity scale of oxygenated groups shown in Figure 6. At the given conditions, the stabilizer is likely to be converting carbonyls and olefins with very little hydrogen consumption and a slight exotherm. Similarly, the first stage converts more of these reactive compounds, again with low hydrogen consumption and a mild exotherm. Future work will consider the need for the first stage reactor. The second stage reactor converts the remaining oxygenated compounds to hydrocarbons and saturates some of the aromatics. The exotherm in this reactor can be large, and heat management is necessary. It is likely that this reactor will be operated in a fashion similar to hydrocrackers, where multiple beds in a single vessel are each cooled with cold hydrogen. For the 2nd stage hydrotreating reactor, product yields, gas and liquid product compositions and the hydrotreated oil distillation curves are derived from PNNL experimental data. Details of reaction conversions, product yields and process conditions of each hydrotreating reactor are summarized in Appendix C.

Products from the last hydrotreating stage are gas and two liquid fractions. The liquid fractions are an aqueous phase and stable hydrocarbon oil phase. The gas product is primarily non-condensable hydrocarbons (methane, ethane, propane, butane), carbon dioxide and excess hydrogen. The carbon dioxide concentration is smaller compared to the hydrocarbons (Elliott 2012). Excess hydrogen is assumed to be recovered by pressure swing adsorption and recycled. The separated aqueous phase product is heavier than the hydrotreated oil phase and contains very little carbon (Elliott 2012), typically less than a half percent by weight. The second stage hydrocarbon product contains less than 2 wt% oxygen. The hydrocarbon product is fractionated into gasoline blendstock, diesel blendstock and heavies. The heavy fraction is assumed to be hydrocracked in a separate reactor that is described in the next section. The product yield strongly depends on process parameters such as hydrotreating conditions, catalyst selection and target product quality (density and oxygen content).

In the studies of bio-oil hydrodeoxygenation, various catalysts, different in active phases, promoters and supports, have been well documented (Wang 2013, Zacher 2013). Sulfided molybdenum based catalysts seem to be well-known and commonly used in the modern hydrotreating processes for bio-oil. Good oil yields and near complete deoxygenation have been achieved at PNNL with such catalysts (Elliott 2013). However, this type of catalyst is not as effective in the stabilization bed, which is designed to reduce the bio-oil reactivity under mild temperatures. Ruthenium-based catalysts work well in this service because they can effectively operate at low temperature to convert highly reactive carbonyl groups to less reactive species. However, the ruthenium-based catalysts may not be suitable for the 2nd stage hydrotreating reactor because they can promote methane production at higher temperatures (Elliott 2013). Final catalyst selections are yet to be determined. In this report, ruthenium-based catalysts on carbon supports are assumed for the stabilizer and the 1st bed, and a molybdenum based catalyst for the final bed. All

catalysts are assumed to have a target 1-year life before complete replacement. Pre-sulfided catalysts for the 1st and 2nd stage hydrotreating are assumed. The naturally low sulfur content of wood derived pyrolysis oil may remove sulfur from the catalyst over time. A makeup stream of sulfiding agent, such as dimethyl sulfide, may be needed to maintain the catalysts in a sulfide state. Future research will help determine if this treatment is needed for effective deoxygenation.

3.3.1. Hydrotreating to Hydrocarbons Design Basis

The main process variables for Area 200 are shown in Table 8.

Table 8. Design Basis for Area 200

| Reactor | Assumption |
|---|-------------------------------|
| Stabilizer | |
| Temperature | 284 °F (140 °C) |
| Pressure | 1200 psia |
| Liquid hourly space velocity | 0.5 volume/h/volume catalyst |
| 1st Stage hydrotreater | |
| Temperature (maximum outlet) | 356 °F (180 °C) |
| Pressure | 2000 psia |
| Liquid hourly space velocity | 0.5 volume/h/volume catalyst |
| 2nd Stage hydrotreater | |
| Temperature (maximum outlet) | 770 °F (410 °C) |
| Pressure | 2000 psia |
| Hydrogen partial pressure at outlet | 1300 psig |
| Liquid hourly space velocity | 0.22 volume/h/volume catalyst |
| Lights removal column (T290) | |
| Number of stages | 40 |
| Tray efficiency | 0.75 |
| Top pressure | 65 psia |
| Other metrics | |
| Total liquid feed to stabilizer, bbl/day (wet) | 8,800 |
| Chemical hydrogen consumption across all hydrotreaters, scf/bbl liquid feed | 3,400 |
| Chemical hydrogen consumption across all hydrotreaters, lb/100 lb dry pyrolysis oil | 5.8 |
| Carbon in hydrotreated oil/Carbon in pyrolysis oil | 0.68 |
| Hydrotreated product specific gravity | 0.85 |

3.3.2. Hydrotreating Cost Estimation

The capital costs for this section are estimated using Aspen Capital Cost Estimator, and have been reviewed by several external reviewers with industry experience. The pressure swing adsorption (PSA) unit is from a vendor budgetary estimate. The stabilizer is a heat exchange reactor with catalyst in the tubes and steam on the shell side. This allows the raw pyrolysis oil to be heated to the reaction

temperature in the presence of hydrogen and a catalyst, thus preventing coking. The first stage reactor is a single fixed bed vessel. The second stage hydrotreater is configured as four fixed bed reactors in parallel to reduce the reactor wall thickness. This proved to be less expensive than a single vessel at the given operating conditions. The estimated installation factor for the reactors is 2.75 to account for internals such as distributors and catalyst support trays. Table 9 shows the total purchased equipment cost (TPEC) and total installed capital cost (TIC) for the hydrotreating section.

Table 9. Hydrotreating Area Capital Costs

| Scaling Stream: 167,600 gpd stable oil product | | |
|--|------------------|-----------------|
| Equipment | TPEC (2011 MM\$) | TIC (2011 MM\$) |
| Reactors | 32 | 88 |
| Compression and pumps | 8 | 9 |
| PSA | 1 | 4 |
| Heat exchange | 3 | 8 |
| Columns and drums | 4 | 6 |
| Total | 48 | 115 |

3.4. Area 300: Product Recovery and Area 500: Hydrocracking

After fractionating the hydrotreated bio-oil, a heavy fraction boiling at a temperature above the final boiling point of diesel is recovered. This heavy fraction is sent to the hydrocracking reactor to be catalytically cracked to additional fuel. The hydrocracking of a heavy fraction from lignocellulosic-based hydrocarbons has not yet been demonstrated as a process separate from hydrodeoxygenation. A simplified flow diagram of hydrocracking and product separation, which forms the basis for the current design, is illustrated in Figure 8.

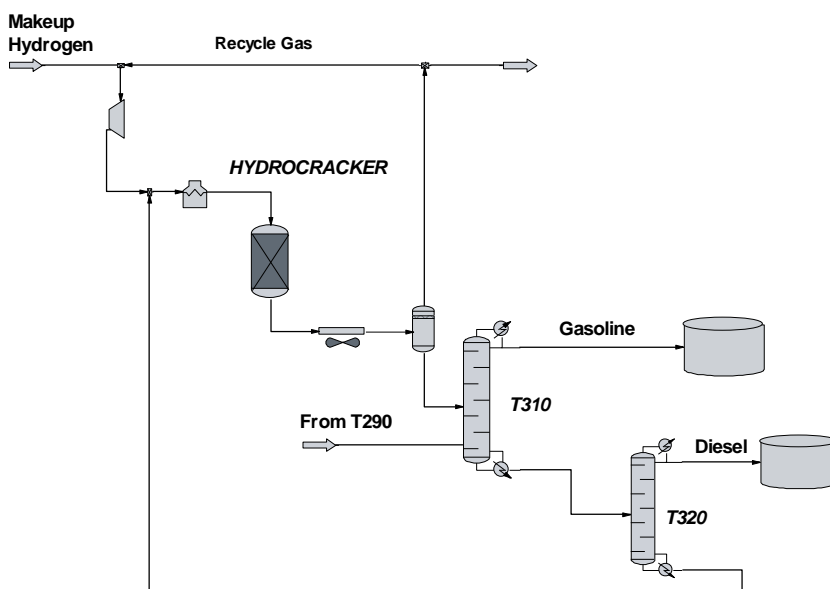


Figure 7. Hydrocracking and Product Recovery Process Flow

3.4.1. Hydrocracking and Product Separation Design Basis

The product from hydrocracking is a mixture of liquids spanning the gasoline and diesel range, and some byproduct gas. The gasoline and diesel range products are separated by distillation. These products are expected to be suitable for blending into finished fuel. More detailed characterization of these blendstocks are needed. The hydrocracking conditions are shown in Table 10.

Table 10. Areas 300 and 500 Design Basis

| Reactor | Assumption |
|---------------------------------------|-------------------|
| Hydrocracker | |
| Temperature | 1380°F (750°C) |
| Pressure | 1300 psia |
| Barrel/day feed | 515 |
| Naphtha splitter (T 310) | |
| Number of stages | 30 |
| Tray efficiency | 0.75 |
| Top pressure | 25 psia |
| Diesel recovery column (T 320) | |
| Number of stages | 30 |
| Tray efficiency | 0.75 |
| Top pressure | 15 psia |
| Other Metrics | |
| Gasoline + diesel specific gravity | 0.79 |

3.4.2. Hydrocracking and Product Cost Estimation

The costs for the 550 bpd hydrocracker and associated equipment (hydrocracking reactor, heat exchangers, pumps, flash drums, and fired heater) were taken from literature (Marker 2005). The distillation columns and associated equipment (reboiler, condenser, condenser drum, and pumps) were estimated using Aspen Capital Cost Estimator.

Table 11. Hydrocracking and Product Separation Capital Costs

| Scaling Stream: 550 BPSD feed | | |
|--------------------------------------|-------------------------|------------------------|
| Equipment | TPEC (2011 MM\$) | TIC (2011 MM\$) |
| Reactor & associated equipment | 5 | 15.1 |
| Columns and associated equipment | 2.1 | 3.4 |

3.5. Area 600: Hydrogen Production

Hydrogen for hydroprocessing (hydrotreating and hydrocracking) is produced via steam reforming of process off-gases generated from fast pyrolysis and hydroprocessing. Additional natural gas is also used to obtain sufficient hydrogen production. For the base case in this study, a natural gas based hydrogen plant using a conventional multi-tube fired reactor with a commercial catalyst is assumed. A sensitivity case using a fluidized bed reformer system is also considered. Process steam is produced via heat integration with the hydrogen plant, and additional available steam is used to generate power on-site.

The base case hydrogen plant uses a conventional natural gas-based stream. An alternate case has also been developed that leverages the extensive work performed at NREL related to tar reforming of syngas. The base case is presented in this section, while the alternate scenario is presented as a sensitivity case in Section 5.1.

3.5.1. Base Case: Conventional Hydrogen Generation

Figure 9 shows the simplified flow scheme for hydrogen generation by steam reforming of natural gas (SRI International 2007, Meyers 2004, H2A 2013) and the off-gas streams from the fast pyrolysis, hydrotreating and hydrocracking processes. The off-gas by itself is insufficient to produce the amount of hydrogen required by the hydrotreaters and hydrocrackers; supplemental natural gas is required. Most of the off-gas from hydrotreating and hydrocracking is used to fire the reformer. However, a portion is compressed and mixed with pyrolysis off-gas and makeup natural gas, which is then hydrodesulfurized (HDS).

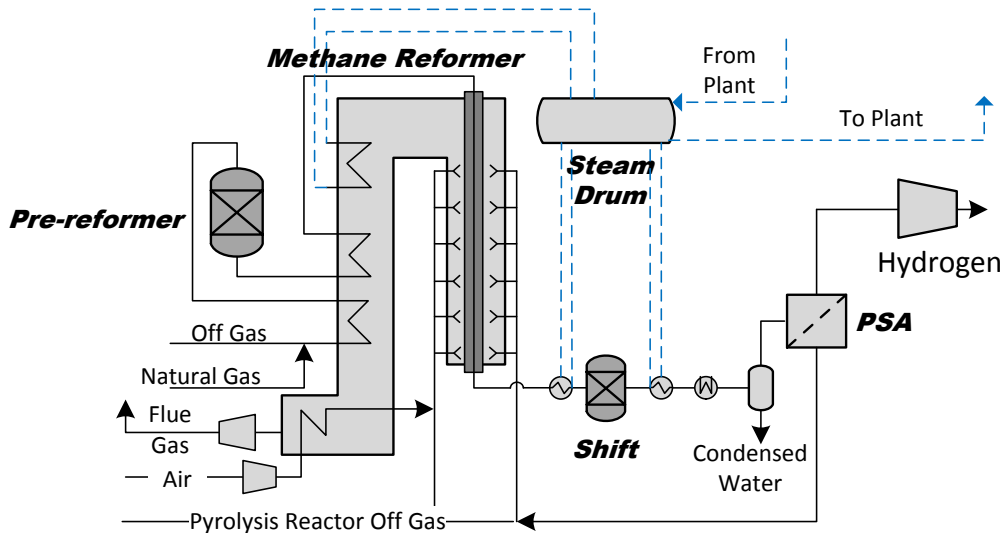


Figure 8. Hydrogen Production Process Flow

Hydrogen for the HDS unit is supplied by the off-gas stream. The gas exiting the HDS is then mixed with superheated steam and sent through an adiabatic pre-reformer to convert C_{2+} compounds to methane prior to entering the main steam reformer to produce syngas. This reduces the rate of coking in the main reformer. The syngas hydrogen content is increased by high temperature shift. After condensing out the

water, the hydrogen is purified by pressure swing adsorption (PSA). Off-gas from the PSA is recycled to the reformer burners.

Saturated steam and superheated steam are generated by recuperating heat from the reformer exhaust and cooling the product from the water gas shift reactor. The generated steam is used in the reformer as a reactant, and is also used for process heating, for example, in the distillation column reboilers.

3.5.2. Hydrogen Generation Design Basis

The design assumptions are shown in Table 12. Gibbs minimization reactors are used to model the pre-reforming, methane reforming and burner reactions. The reactor methane conversion of 80 mole % meets that reported by SRI (SRI International 2007).

Table 12. Area 600 Design Basis

| Reactor | Assumption |
|----------------------------|--------------------------------|
| Pre-reformer | |
| Inlet temperature | 930°F (500°C) |
| Outlet pressure | 344 psia |
| Steam-to-carbon ratio | 2.4 |
| Methane reformer | |
| Makeup natural gas | 3.7 MMscf/day |
| Steam pressure | 670 psia |
| Outlet temperature | 1562°F (850°C) |
| Outlet pressure | 314 psia |
| Burners | |
| Bridge wall temperature | 1800°F (982°C) |
| Pressure | Slightly positive |
| Shift Reactor | |
| Outlet temperature | 675°F (357°C) |
| Outlet pressure | 300 psia |
| Approach to equilibrium | 98% |
| PSA | |
| Hydrogen production rate | 44.5 MM scf/day H ₂ |
| Hydrogen delivery pressure | 283 psia |
| Hydrogen recovery | 85% |

3.5.3. Hydrogen Generation Cost Estimation

Capital costs for hydrogen generation are taken from the SRI 2007 Yearbook and scaled to the necessary hydrogen production rate using the SRI scale factor. The equipment includes a sulfur guard bed, pre-reformer, primary reformer with nickel catalyst, high temperature shift reactor, PSA unit, waste heat recovery producing high pressure steam and all associate outside battery limit equipment. The fixed capital investment for a 44.5 million scf/day hydrogen facility is \$107 million dollars in cost year 2007. Converted to 2011 dollars and scaled to the base case hydrogen production, the capital cost at the project level (including direct and indirect costs) is \$119 million dollars. This is more conservative than the

capital cost from the H2A program developed for the DOE Hydrogen Program which estimated the cost at \$96 million dollars (2007). However, the H2A configuration does not include a pre-reformer.

3.6. Balance of Plant

The balance of plant consists of the supporting systems for the plant: cooling water service, tank farm, wastewater treatment and flare.

Process Water

Cooling water usage is minimized through the use of air fin coolers where applicable. The process water demand is shown in Table 13. Most of the cooling tower water is used to indirectly cool the fast pyrolysis bio-oil that is recirculated in the quench system. The 2009 design case (Jones 2009) assumed that all indirect cooling of pyrolysis vapors was achieved with cooling water. For this report, cooling water demand is reduced through the combination of air cooling followed by trim cooling with water. This in turn reduces cooling water makeup.

Table 13. Process Water Demands

| Source of Water Demand | Model |
|--|-------|
| Cooling tower makeup, gpm | 29 |
| Steam reformer boiler feed water makeup, gpm | 162 |
| Total, gpm | 191 |
| Gallons water per gasoline gallon equivalent product | 1.4 |

Power

Most of the electricity is purchase from the grid. However, some superheated steam is used as rotating equipment drivers.

Wastewater

Wastewater from the hydrotreaters typically contains less than 1 wt% carbon as shown in Figure 10. A sample of the aqueous phase from the hydrotreaters (2 wt% oxygen in organic product) at 0.55 wt% carbon was analyzed and found to have a COD of approximately 10 g/L. This carbon is likely to be mostly substituted phenolic compounds and the low concentration makes recovery uneconomical. A study by Tziotzios (2007) showed that waste water containing phenol with COD as high as 51 g/L can be effectively treated by aerobic digestion. The biochemical ethanol design report (Humbird 2011) also showed an example of using an aerobic digester to treat waste water with COD of 6 g/L before discharging the water to municipal sewer. Thus, wastewater from hydrotreating is assumed to be treated by aerobic digestion before discharge to a public water treatment facility. Capital costs for this system were taken from the original fast pyrolysis design report (Jones 2009), which compares well with scaled values from the Humbird report.

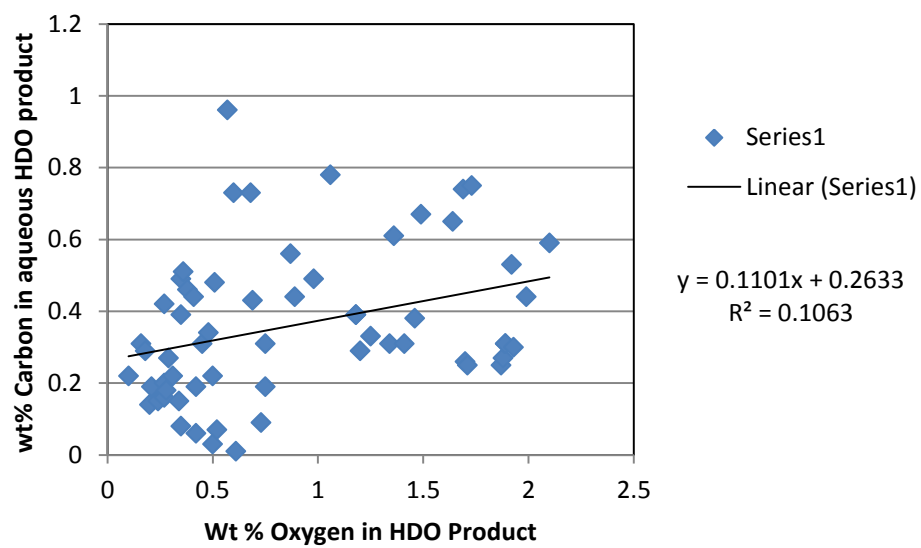


Figure 9. Carbon Content of HDO Aqueous Phase

4. Process Economics

Process economics are the combination of feedstock cost, and capital and operating costs associated with construction and operation of the conversion plant. These costs are combined in a discounted cash flow analysis to estimate the minimum fuel price needed to meet a 10% internal rate of return when the net present value is equal to zero.

4.1. Operating Costs

Table 14 lists the assumptions used to calculate the operating costs for the base case with the commercial natural gas based hydrogen plant with a pre-reformer.

Table 14. Variable Operating Cost Assumptions

| Variable | Value | Source |
|---|--|--------------------------|
| Materials | | |
| Feedstock, \$/dry ton | 80 | INL |
| Stabilizer & 1 st Bed Catalyst, \$/lb (2011) | 60 | Calculated |
| 2 nd Bed Hydrotreating Catalyst, \$/lb (2007) | 15.5 | SRI 2007 |
| Hydrocracking Catalyst, \$/lb (2007) | 15.5 | SRI 2007 |
| Hydrogen Plant Catalysts, \$/1000 scf H ₂ (2007) | 3.6 | SRI 2007 |
| Sulfiding Agent, \$/lb (2007) | 0.799 | SRI 2007 |
| Utilities | | |
| Natural Gas, \$/1000 scf | 5.1 | EIA 2011 Heywood 1998 |
| CH ₄ , C ₂ H ₆ , N ₂ , C ₃ H ₈ , C ₄ H ₁₀ , CO ₂ , C ₅ H ₁₂ , C ₆ H ₁₄ LHV, BTU/lb | 94%, 3.3%, 1.0%, 1.0% 0.35%, 0.3%, 0.04%, 0.01% 20,854 | |
| Electricity, ¢/kwh | 6.89 | EIA 2011 |
| Cooling tower water makeup (20 °F rise) | 90 °F service 110 °F return | Assumption |
| Chemicals | | |
| Boiler feed water makeup, ¢/1000 gallon | 100.08 | Aden 2007 |
| Cooling tower makeup, ¢/1000 gallon | 100.08 | Aden 2007 |
| Cooling tower chemicals, \$/lb | 2.27 | Humbird 2011 |
| Boiler feed water chemicals, \$/lb | 1.36 | Humbird 2011 |
| Ash Disposal, \$/ton | 18 | Phillips 2007 |
| Wastewater disposal, \$/100 cubic feet | 2.07 | Aden 2007 |
| Solids waste disposal, \$/ton | 18 | Aden 2007 |

Fixed costs are shown in Table 15. Salaries are taken from Dutta 2011 and converted to a 2011 dollar basis using US Bureau of Labor Statistics labor cost index.

Table 15. Fixed Operating Costs and Assumptions

| Salaries | | | |
|-----------------------|----------------------|--------------------|--------------------------|
| Position Title | Salary (2011) | # Positions | Total Cost (2011) |
| Plant Manager | 161,400 | 1 | 161,400 |
| Plant Engineer | 76,800 | 1 | 76,800 |
| Maintenance Super | 62,600 | 1 | 62,600 |
| Lab Manager | 61,500 | 1 | 61,500 |
| Shift Supervisor | 52,700 | 5 | 263,400 |
| Lab Technician | 43,900 | 3 | 131,700 |
| Maintenance Tech | 43,900 | 16 | 702,500 |
| Shift Operators | 52,700 | 40 | 2,108,000 |
| Yard Employees | 30,700 | 12 | 368,800 |
| Clerks & Secretaries | 39,500 | 3 | 118,600 |
| Total | | 83 | 4,055,000 |

| Other Fixed Costs | | |
|--------------------------------|----------------------------------|-------------------|
| Cost Item | Factor | Cost |
| Benefits and general overhead | 90% of total salaries | 3,649,000 |
| Maintenance | 3% of fixed capital investment | 21,006,000 |
| Insurance and taxes | 0.7% of fixed capital investment | 4,901,000 |
| Total Other Fixed Costs | | 33,611,000 |

4.2. Fixed Capital Investment

The following summarizes the purchased and installed equipment costs presented in Section 3. The capital costs are from various sources. The pyrolysis unit and associated equipment is derived from published costs for a commercial unit (Ensyn 2012). The hydrogen plant is also from published costs (SRI 2007). The majority of the remaining equipment was estimated using Aspen Capital Cost Estimator. Fixed capital costs are summarized in Table 16.

Table 16. Total Project Investment

| Process Area | Total Capital | Fixed Capital Investment (2011 MM\$) |
|---------------------|----------------------------|---|
| 100 | Fast pyrolysis | 279 |
| 100 | Heat recovery & filtration | 22 |
| 200 | Hydrotreating | 198 |
| 300-500 | Product Finishing | 32 |
| 600 | Hydrogen generation | 119 |
| 700 | Balance of Plant | 16 |
| Total | | 665 |

4.3. Minimum Fuel Selling Price

The minimum fuel product selling price (MFSP) for the gasoline and diesel blendstock was determined using a discounted cash flow rate of return analysis. The methodology is identical to that used in Jones et al. (2009). The MFSP is the selling price of the fuel that makes the net present value of the process equal to zero with a 10% discounted cash flow rate of return over a 30 year plant life and 40% equity with the remainder debt financed at 8% interest for a 10 year term. The stream factor of 90% (7884 hours per year) is reasonable given the need for annual catalyst replacement. This results in a base case MFSP of \$3.39/gasoline gallon equivalent (gge). This result is within the tolerance of the \$3/gge programmatic target (DOE 2013). While two products are produced, (motor gasoline blendstock and diesel blendstock), they are combined and referred to as a “fuel product” as the production cost for both products are the same. A heating value of 116,090 BTU/gal is used to convert the heating value of the fuel products to a gasoline gallon equivalent basis. Section 1.2 gives the economic parameters used to calculate the MFSP. A sensitivity analysis was conducted to determine the effect of different financial and operating assumptions on the MFSP (Section 5.3).

5. Economic and Technical Sensitivities

The design case describes a single operating point for a standalone processing unit. This section investigates the production cost sensitivities to technical, financial, and market parameters. These include plant size, internal rate of return (IRR), feedstock costs, reactor conditions and product yields. Two important scenarios are highlighted: hydrogen generation methods and the effect of ash content on overall yields.

5.1. Alternate H₂ Production Scenario: Fluidized Bed Reformer

As an alternative to the conventional fixed bed reactor, steam reforming can also be carried out in a catalytic fluidized bed (CFB) reactor. The process flow diagram and heat and material balances for this alternative case of hydrogen production are given in Appendix D-1. The fluidized bed reformer is coupled with a second vessel where the catalyst is regenerated after being separated from the reformed gases. Since the reformer feed contains some of the components present in pyrolysis oil, the propensity for coking may be high. This process may be a way of mitigating any such problem. Carbon deposition on the reformer catalyst can be removed in the regenerator prior to recirculation and reused in the reformer. Consequently a pre-reformer is not necessary for this configuration.

The fluidized bed steam reformer design uses on a nickel-based catalyst developed at NREL for the reforming of biomass derived syngas containing tars and hydrocarbon species (Dutta 2011, Dutta 2013). Non-condensable gases from pyrolysis, off-gases from hydrotreating, and hydrocracking, and supplemental natural gas are combined to meet the process hydrogen requirements. In addition to the reforming reactions to produce CO and H₂ from hydrocarbons and oxygenated species, the nickel catalyst also maintains significant water gas shift activity. The overall reforming process is endothermic. Heat produced via oxidation of deposited carbon on the catalyst and combustion of supplemental process off-gases in the regenerator elevates the catalyst temperature. The hot regenerated catalyst supplies the heat required for reforming when transferred to the reformer. Further details of the reformer configuration can be found in US Patent 8,241,523 B2 (Apanel 2012).

Hot flue gases and reformed gases are used to preheat the reformer inlet and combustion air, and to generate steam. The design temperature for the reformer outlet is 1670°F (910°C). A molar steam-to-carbon ratio (SCR) of 4 was used to ensure high hydrogen efficiency.

High temperature shift (HTS) and low temperature shift (LTS) reactors downstream of the reformer are used to further shift CO and H₂O into H₂ and CO₂, without the addition of more steam during these stages. The process gas stream leaves the reformer at 1,670°F (910°C) and is cooled to 662°F (350°C) for HTS. The HTS and LTS are modeled as fixed bed equilibrium reactors using approach temperatures of 35°F and 20°F (19°C and 11°C), respectively (Spath 2005). The gas exiting the HTS reactor is cooled to 392°F (200°C) prior to entering the LTS reactor. The LTS reactor effluent process gas is cooled and process condensate is separated. Most of the process condensate is recycled to the reformer after blowdown. The gas is then pressurized to 350 psia and sent to a pressure swing adsorption (PSA) system.

The PSA unit is used to separate the hydrogen from the other components in the shifted gas stream, mainly CO₂ and other unreacted hydrocarbons. A hydrogen recovery rate of 85% is used in this design. Purge gas from the PSA system is sent to the catalyst regenerator (reformer furnace) to meet the fuel

requirement. The product hydrogen at the PSA outlet is at 77 psia and 283°F (139°C) and requires further compression prior to use in the Area 200 stabilizer reactor.

Two steam levels are used. Low pressure process steam (at 74 psia and 307°F) supplying the reformer uses mostly recycled process condensate. Higher pressure (675 psia and 499°F) steam is generated using clean boiler feed water. High pressure steam is used for process heating and excess high pressure steam is superheated to 1000°F (538°C) for power generation. The heat duty available for steam generation is mainly from the reformer section. Additional heat duty from pyrolysis and bio-oil upgrading areas are also included for heat integration. A pinch analysis was performed to validate the steam production based on the available total hot duty and cold duty.

5.1.1. Fluidized Bed Reformer Design Basis

The fluidized bed reformer is designed to produce 9,841 lb/hr (44.5 MMscf/d) of pure hydrogen at 77 psia and 283°F (139°C) to meet hydrotreater demands. Table 17 summarizes the conversion assumptions at the fluidized steam reformer. These conversions were incorporated into the Aspen Plus model to simulate expected steam reformer performance.

Table 17. Design Performance for the Reforming Catalyst (Dutta 2011, Dutta 2013)

| Compound | Target Conversion |
|---|-------------------|
| Methane (CH ₄) | 80% |
| Ethane (C ₂ H ₆) | 99% |
| Ethylene (C ₂ H ₄) | 90% |
| Benzene (C ₆ H ₆) | 99% |
| Ammonia (NH ₃) | 90% |
| All others* | 90% |
| * Includes oxygenated species present in reformer feed. | |

5.1.2. Fluidized Bed Reformer Cost Estimate

Table D-1 presents the equipment list and cost estimates for hydrogen production using a fluidized bed reformer system. All costs are projected in 2011 U.S. dollars. Capital costs were developed from a variety of sources. Capital costs for some common equipment items (e.g., tanks, pumps, vessels) are based on a recent NREL study (Dutta 2011). Cost of the fluidized bed reformer package including a dual fluidized bed loop, cyclones and ancillaries were estimated based on a prior cost estimation study (Dutta 2011, Worley 2012). Costs associated with HTS, LTS, and PSA were based on Spath (2005). Equipment costs were scaled based on material and energy balances from process simulation. Equipment costs obtained in earlier or later years are inflated or deflated to a 2011 U.S. dollars basis using the Chemical Engineering Plant Cost Indices (CEI 2013). Operating costs and utility consumption are shown in Appendix Tables D-2 and D-3, respectively.

Table 18. Comparison of Hydrogen Generation Scenarios

| Cost and Consumption | Base Case with Conventional Hydrogen Generation | Base Case with CFB Hydrogen Generation |
|------------------------------|--|---|
| Natural gas usage, scf/gge | 19.33 | 15.33 |
| H ₂ demand MMscfd | 44.5 | 44.5 |
| Electricity demand, kWh/gge | 1.22 | 1.45 |
| Capital, million \$ | 665 | 691 |
| MFSP, \$/gge | 3.35 | 3.45 |

The results are essentially identical from a MFSP standpoint and within the expected uncertainty of this work. The somewhat higher capital for the CFB scenario is mitigated by lower natural gas usage. The higher SCR ratios, higher reforming temperatures and lower pressures used in the CFB reactor allows greater conversion of methane than in the base case. Methane conversion higher than the 80% value shown in Table 17 may be possible in the CFB reformer (Dutta 2013) resulting in improved economics. Also, the addition of the LTS reactor improves the overall conversion of hydrocarbons to hydrogen. However, additional compression is needed as compared to the base case because the reformer operates at near atmospheric pressure. Additional capital cost and stream flow information for this scenario can be found in Appendix D-2.

5.2. High Ash Feedstock Scenario

The base case assumes an ash content of 0.9 wt%. This deep degree of de-ashing may not be possible as discussed in Section 3. This sensitivity considers the effects of 1.9% ash on the production costs assuming yield effects derived from Oasmaa et al. (2010) and reported in Table 3 of this report. Table 19 shows the sensitivity to the various assumptions used in the model. The lower fuel yield is somewhat offset by lower capital and lower natural gas usage. The natural gas usage is reduced as the ash content increases because significantly more off-gas is generated in the fast pyrolysis section and this gas can be used for hydrogen generation. This scenario is of interest because more biomass is available at lower cost if the ash content is increased.

Table 19. Effect of Higher Ash Biomass

| Cost and Consumption | Base Case with 0.9wt% Ash | Base Case with 1.9wt% Ash |
|---------------------------------|----------------------------------|----------------------------------|
| Fuel yield, gal/dry ton biomass | 84 | 75 |
| Natural gas usage, scf/gal | 19.3 | 5.9 |
| H ₂ demand, MMscfd | 44.5 | 40 |
| TCI, million \$ | 700 | 672 |
| MFSP, \$/gge | 3.39 | 3.55 |

The effect of ash on pyrolysis organic yield is a combination of the amount of ash, and the type of reactive species in that ash. Further work is needed to quantify this effect. Additionally, a possible outcome that is not captured in this scenario is increased ash level in the bio-oil that is carried over into downstream equipment and the subsequent effect on catalyst maintenance.

5.3. Additional Technical and Financial Sensitivities

Figure 11 shows the sensitivity to the various market and financial assumptions used in the model.

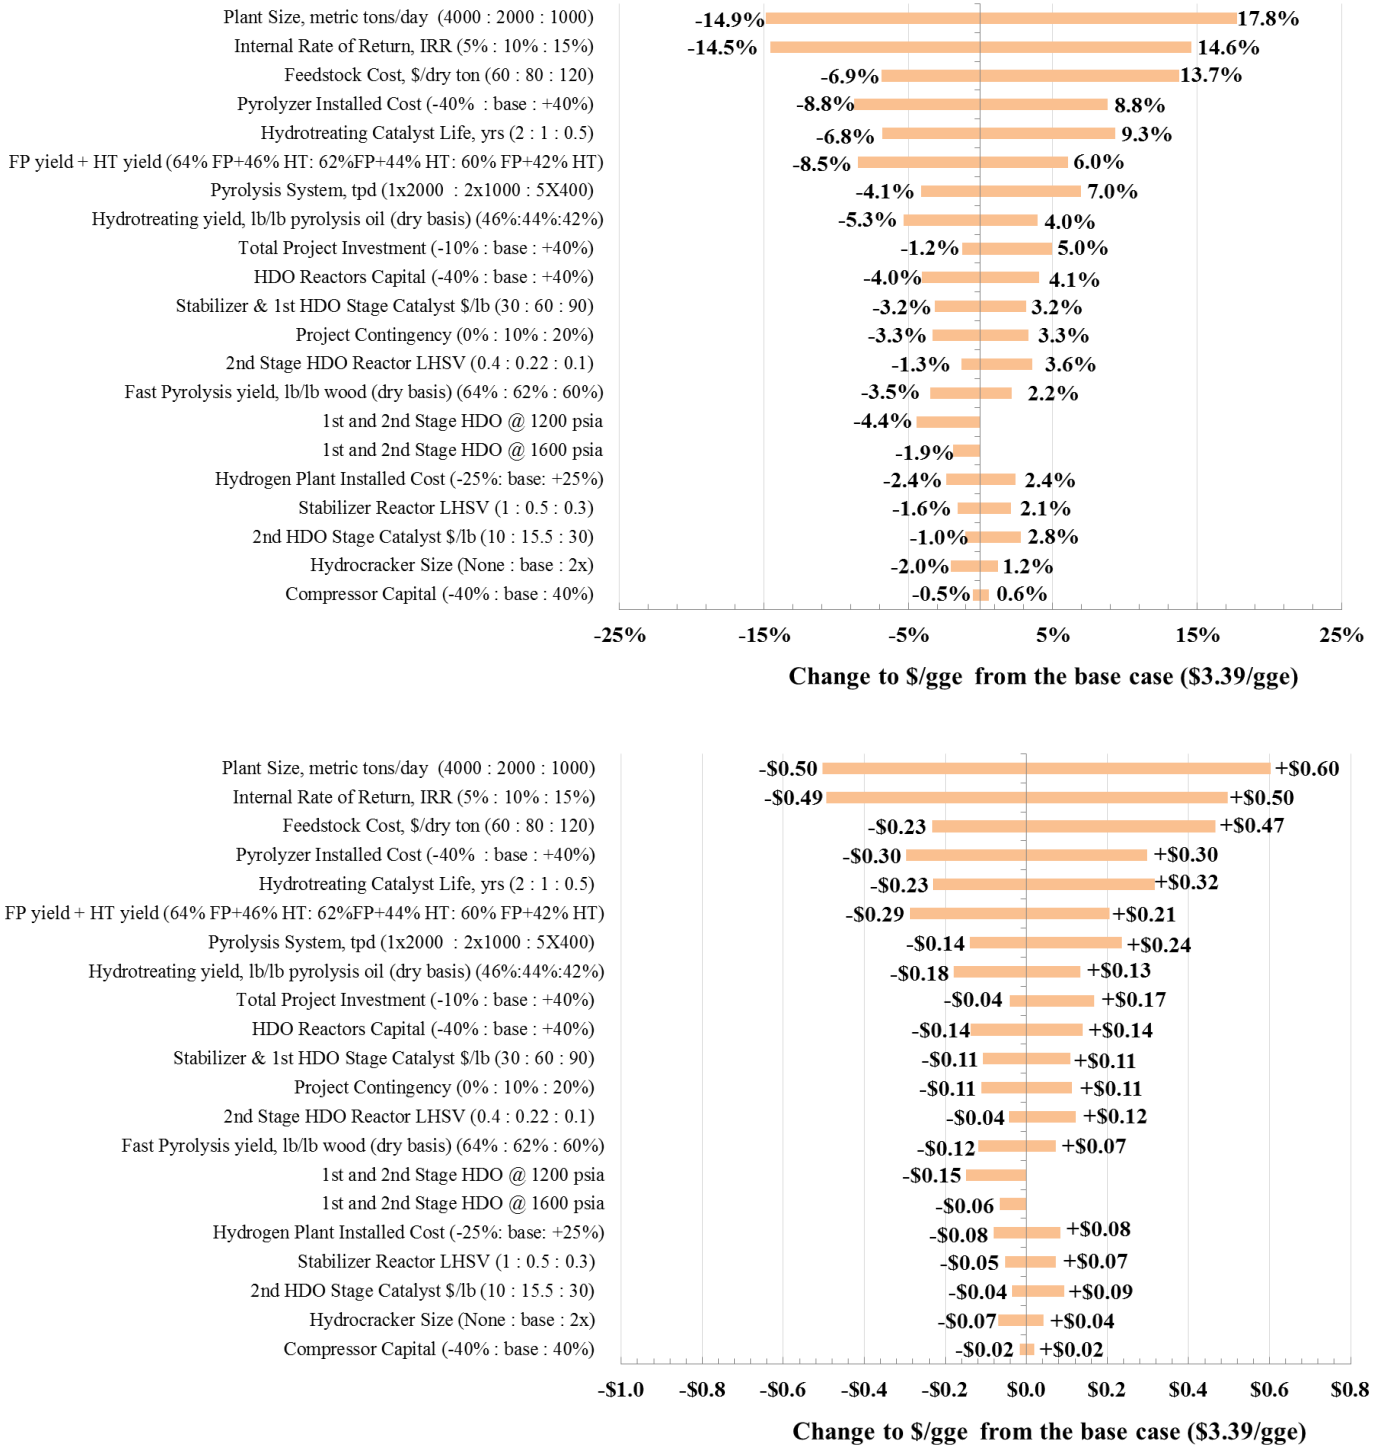


Figure 10. Sensitivity Analysis Results

Plant scale, capital investment and IRR are the largest market and financial type effects. Feedstock costs are the next largest contributor. Use of a low ash feedstock such as pine (at approximately \$120/ton) increases the production cost by 14%, thus highlighting the need for blended feedstocks using lower cost materials.

Product yield is one of the most significant cost parameters. In the base case, pyrolysis oil yield and hydrotreating oil yields are 64% wt per dry wood and 44% per dry pyrolysis oil, respectively. Reduction of pyrolysis oil yield to 60% and hydrotreating oil yield to 44% will increase the selling price by 6%.

The published capital costs for the pyrolysis system (reactor, combustor, cyclones and quench equipment) are reported as $\pm 40\%$ and this results in a 9% variation in the MFSP. Hydrotreater capital costs are a function of the operating temperature, pressure and liquid hourly space velocity (LHSV). The temperature and pressure set the wall thickness and the LHSV determines the vessel capacity. Reducing the first and second stage reactors pressure to 1200 psi and doubling the space velocity for the second stage results in a 7% reduction in the reactor costs and also reduces compression requirements.

Hydrotreating catalysts are also important to the overall economics of the process. The stabilizer and 1st stage reactor may use a precious metal catalyst. The annual catalyst cost for these reactors is a function of metal type, metal loading and replacement rate. The base case catalyst is assumed to be \$60/lb. This price will vary with the cost of the support and the ruthenium loading. Current costs for ruthenium are at \$70 per troy ounce (PGM 2013). A 50% variation in the price causes a 3% variation in the MFSP. The 2nd stage reactor may be able to use a nickel or cobalt type catalyst which is expected to be less expensive. However, this reactor also has the largest catalyst inventory, thus doubling the catalyst costs also causes a 3% increase in catalyst cost.

The time on-stream before catalyst replacement is needed has a very large effect. The base case catalyst replacement rate is assumed to be 1 year for each reactor. Increasing this to two years causes the MFSP to drop by 7%. Reducing the catalyst life to six months increases the MFSP by 9%.

6. Environmental Sustainability Metrics

In addition to setting technical and economic targets for the conversion pathways included in the MYPP (DOE 2013), BETO is working towards setting baselines and targets for environmental sustainability metrics. Sustainability is a cross-cutting element of the BETO program whose overarching goal is to “understand and promote the positive economic, social, and environmental effects and reduce the potential negative impacts of biofuels production activities” (DOE 2013). A specific goal of the sustainability element is to identify metrics and set targets for at least one conversion pathway by 2013. To reach this goal, BETO, DOE National Laboratories and others have worked together to develop an initial set of important sustainability metrics for the conversion stage of the biofuel life cycle: greenhouse gas (GHG) emissions, fossil energy consumption, fuel yield, biomass carbon-to-fuel efficiency, water consumption, and wastewater generation. Shown in Table 20 are the estimated metric values for the conversion plant for the updated design base case (low ash, conventional hydrogen generation).

Table 20. Sustainability Metrics for Fast Pyrolysis and Upgrading

| Sustainability Metric | 2017 Projected |
|---|----------------|
| GHGs (g CO ₂ -e/MJ fuel) – (fossil emissions; biogenic emissions) ¹ | 18.9; 85 |
| Fossil Energy Consumption (MJ fossil energy/MJ fuel product) ² | 0.301 |
| Total Fuel Yield (gal/dry ton wood; gge/dry ton wood) | 84; 87 |
| Biomass Carbon-to-Fuel Efficiency (C in fuel/C in biomass) | 47% |
| Water Consumption (m ³ /day; gal/GGE) ³ | 1050; 1.4 |
| Wastewater Generation (m ³ /day; gal/GGE) ⁴ | 932; 1.3 |

¹ Biogenic emissions include those contained in the char combustor exhaust, the heat from which is used in the biomass dryer (not part of the conversion plant).

² Fossil energy consumption does not include grinding of the feedstock prior to the pyrolysis step.

³ Water consumption and wastewater generation include only direct use/emissions and do not include water associated with upstream production of materials and energy used at the plant.

⁴ Wastewater generation includes both wastewater from hydrotreating and blowdown from the cooling towers

The GHG and fossil energy consumption metrics include both direct effects at the plant and “upstream” effects associated with the production and distribution of materials and energy for plant operations; i.e., these are the lifecycle emissions and energy usage for the conversion stage of the fuel supply chain. Water consumption and wastewater generation values in Table 20 consider only direct water inputs and wastewater generation at the plant and thus do not include water consumed or generated during production and distribution of materials and energy (e.g., thermo-electric power) used at the plant.

Metrics for other important air emissions from the conversion facility, such as criteria air pollutants (e.g., NO_x, SO_x, particulate matter, and VOCs) have not yet been estimated due to a lack of data on formation of these components during conversion processes. Through separate BETO funding, efforts are currently underway to more accurately model and measure criteria air pollutant emissions from the biorefinery, specifically those resulting from pyrolysis char and off-gas combustion at the plant. The following sections provide a more detailed description of the sustainability metrics and a discussion of the results.

6.1. Greenhouse Gas Emissions and Fossil Energy Use

BETO is developing technologies that will facilitate the volumetric requirements of the national Renewable Fuel Standard (RFS2), as legislated by the Energy Independence and Security Act (EISA) of 2007. Reducing fossil energy use and GHG emissions is integral to the RFS2. In order to be eligible for the RFS2 program, fuels made from renewable biomass must meet the renewable fuels categories definitions, which includes having lifecycle GHG emissions that are 50% (advanced biofuel) or 60% (cellulosic biofuel) less than the petroleum baseline. While RFS2 mandates the EPA to conduct its own life cycle analysis (LCA) to determine fuel qualification, it is essential that lifecycle analysis be performed during the development of these pathways in order to predict and facilitate improvement of environmental performance. In many ways, this approach is analogous to that of techno-economic analyses, allowing continual evaluation and improvement of the design throughout the technology research and development phase.

Conversion processes generate fossil-based GHG emissions stemming from fossil fuel consumption at the plant (e.g., natural gas) and from upstream production and distribution of materials and energy that are used at the plant (e.g., natural gas, grid electricity, chemicals, catalyst). Conversion GHGs consist primarily of CO₂ (95%), with the remainder being methane released during natural gas production and distribution. Conversion processes also result in direct biogenic CO₂ emissions from pyrolysis, char combustion, and oil upgrading processes, as well as off-gas reforming and combustion. The design is heat integrated and therefore any light gases that are produced at the plant are completely combusted for heat. Apart from land use change impacts for certain feedstocks, biomass is generally regarded as a carbon-neutral feedstock (i.e., carbon absorbed during growth equals carbon emitted during processing and final use), and therefore fossil energy use and emissions receive the majority of attention.

Metrics for conversion GHGs and fossil energy use are based on material and energy balances from the process models, along with information from the Ecoinvent database (2011) and U.S. LCI database (LCI 2012). Emissions and energy consumption for the U.S. average grid mix of electricity is used. The lifecycle modeling software, SimaPro (2011), is used to estimate the cumulative GHG emissions and fossil energy usage. Due to a lack of available data on catalyst manufacture, recycling and reclamation processes, this component is approximated with a zeolite product from the Ecoinvent database. Future work on development of energy and material inventory data for the catalysts is necessary to fill this data gap. It is possible that catalyst will not contribute significantly if target economic catalyst lifetimes are achieved (i.e., at least 1 year). However, estimation of the catalyst impact is necessary to be able to assert this assumption. Also, the use of precious metal or platinum group metals for catalysts may result in significantly different GHG and other metric values compared to NiMo or CoMo catalysts.

Figure 12 shows the contributing factors to the total fossil GHGs for the conversion plant. As shown, natural gas use accounts for 57% of the total emissions. Using more renewable sources of hydrogen (e.g., pyrolysis oil or adjusting gas production in pyrolysis to meet hydrogen needs) may reduce the carbon footprint for conversion, however, the technical feasibility of these options as well as the impact on economics needs to be determined.

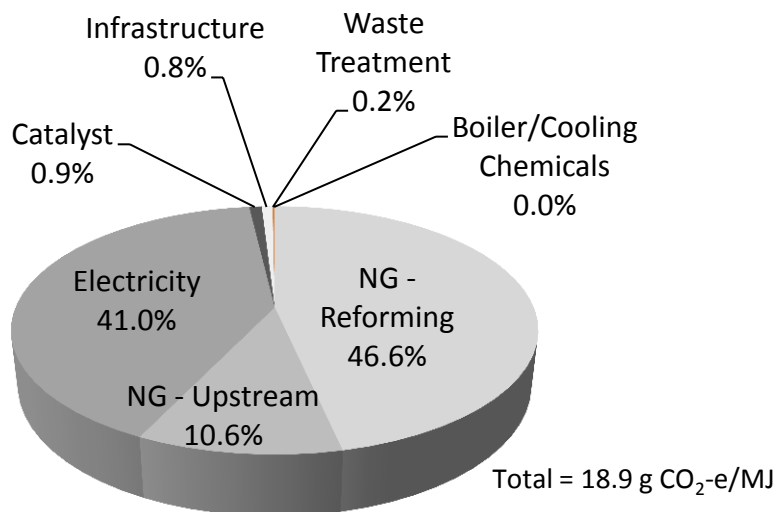


Figure 11. Contributing Processes to Conversion GHGs for Fast Pyrolysis and Upgrading

Using the conversion GHGs, the full life cycle GHG emissions were estimated for gasoline fuel from woody feedstocks using fast pyrolysis and upgrading, considering both forest residues and purpose grown southern pine feedstocks. The inventory data sources and primary assumptions for feedstock production and logistics and fuel distribution and consumption are listed in Table 21. It is important to note that the current pathway configuration assumes that the preprocessing operations are located in close proximity to the biorefinery and as such, the heat contained in the pyrolysis char combustor exhaust is used to dry the feedstock (i.e., no additional fossil energy source is used for feedstock drying). In an advanced uniform format logistics scenario where biomass is collected at regional depots for blending, biomass drying energy would need to be supplied separately. Energy consumption for hot water de-ashing is based on conventional processes used in the food industry. As the specifics of this process are highly uncertain at this time, a range of values is considered. Water makeup needed for the de-ashing process is not estimated. Direct and indirect land use change impacts of pine production are not included in the analysis.

Table 21. Data Sources and Assumptions for Fuel Life Cycle GHG Analysis

| Life Cycle Process | Reference/Assumption | | |
|---|--|---------------|-------------|
| Forest residue collection | U.S. LCI Database (LCI 2012) | | |
| Forest residue logistics | Muth et al. (2013) | | |
| Purpose grown pine production | Perlack et al. (2011); lime application from Tyree et al. (2006) | | |
| Pine harvesting and logistics | Muth et al. (2013) | | |
| Feedstock transportation distance | 50 miles | | |
| Wood de-ashing | <u>Low</u> | <u>Median</u> | <u>High</u> |
| Water circulation, gal/dry ton | 450 | 2725 | 5000 |
| Natural gas heat ¹ , MMBtu/dry ton | 0.08 | 0.46 | 0.83 |
| Fuel distribution and combustion | GREET model (ANL 2012) | | |

¹ Heat required for raising water 20 °F above ambient temperature.

Figure 13 shows the full life cycle GHGs for gasoline from fast pyrolysis and upgrading of woody feedstocks. The uncertainty bars around the total GHGs and the percent reduction estimates correspond to the range of energy values considered for the wood de-ashing process. The fuel production stage is the most GHG-intensive stage of the fuel cycle, comprising 53% and 62% of the total emissions for fuels from pine and forest residue, respectively. Total emissions for southern pine based gasoline range from 33.8 to 38.9 g CO₂-eq/MJ gasoline, equating to a reduction in GHGs of 58-64% as compared to the petroleum baseline (GREET, 93.4 g/MJ). Total emissions for forest residue based gasoline range from 28.3 to 33.3 gCO₂-eq/MJ gasoline, equating to a reduction of 64-70% as compared to the petroleum baseline. These results suggest this fuel is in the range of the EISA RFS cellulosic biofuel definition (60% GHG reduction), however, final qualification is made by the EPA based on their own analysis and determination. In addition, through collaboration with Argonne National Laboratory, energy and materials inventory from this work will be integrated into the GREET model for further analyses.

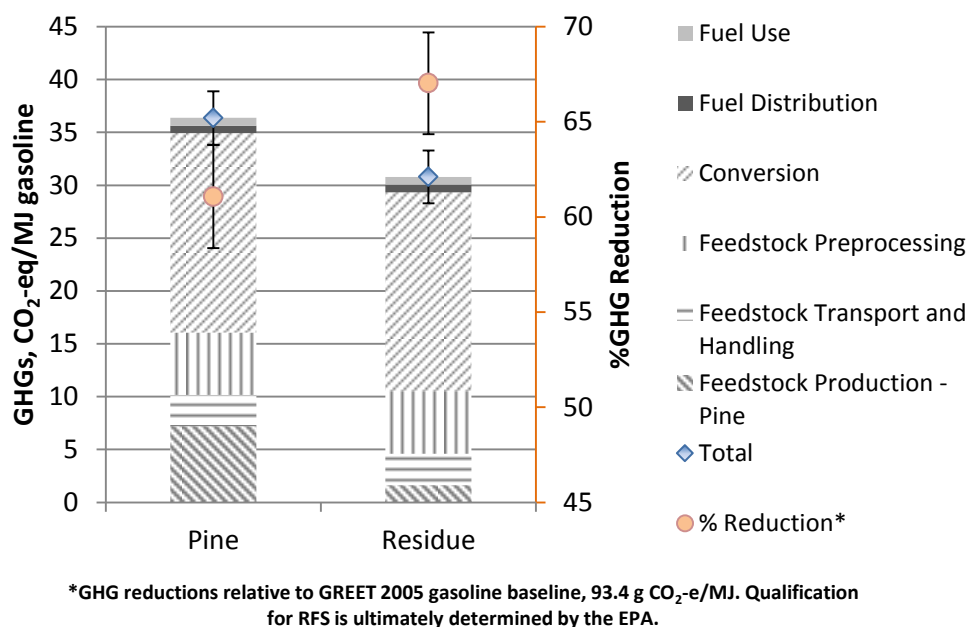


Figure 12. Life Cycle GHG Emissions for Fuel from Fast Pyrolysis and Bio-oil Upgrading of Southern Pine and Forest Residue

(Uncertainty bars reflect range for wood de-ashing process energy, see Table 21).

6.2 Fuel Yield and Biomass Carbon-to-Fuel Efficiency

An overarching goal of BETO is to enable technologies that produce transportation biofuels in a sustainable way. Fuel yield and biomass carbon-to-fuel efficiency are important measures of natural resource utilization and are inherent to biofuel sustainability. With respect to GHGs, there is an important tradeoff that exists between the fuel yield and natural gas requirement for this pathway and others that similarly produce intermediate products requiring hydrogen-based upgrading. This tradeoff stems from the fact that as fuel yields from bio-oil hydrotreating increase, there is less off-gas available for hydrogen generation and thus, more natural gas is needed for the plant. Fuel yield and biomass carbon-to-fuel efficiency are measures of how efficient the technology is at producing liquid fuel. Therefore, when

comparing fuel options, it is important to present these metrics alongside GHGs to provide a more comprehensive representation of the overall performance of the conversion process and the balance between these metrics. For example, a conversion process may have very low (or even negative) GHGs, but this may be due to low yields and a large portion of its biomass carbon going to electricity production (producing a large GHG credit).

6.3 Water Consumption and Wastewater Generation

Protection and conservation of water resources is a global concern as the potential impacts of climate change, growing population, and energy demand become increasingly evident. Energy production is a leading consumer of water within the industrial sector and the effect of biofuel production on water resources is an important sustainability concern. Consumptive water use associated with fast pyrolysis and upgrading consists of makeup water for the steam and cooling systems. Boiler feed water makeup is needed to replace steam consumed in the hydrogen plant. Fresh cooling water is needed to make-up for losses at the cooling tower (e. g, evaporation and drift) and blowdown for maintenance of the recirculating cooling system. Figure 14 shows the contributing processes to overall direct consumptive water use for the biorefinery.

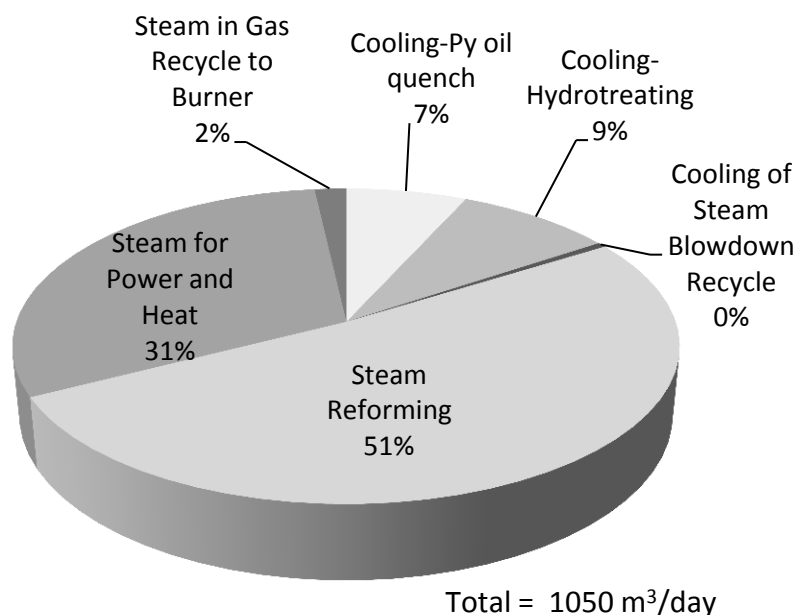


Figure 13. Contributing Processes for Consumptive Water Use for Fast Pyrolysis and Upgrading

Water consumed for production of electricity and materials used at the biorefinery (e.g., electricity, natural gas, and catalyst) and for life cycle stages upstream and downstream of conversion is not included in the analysis. As shown, boiler feed water makeup for steam production is approximately 84% of the total water consumed for the conversion processes. Approximately 60% of the steam is consumed in the reforming and water gas shift reactions for hydrogen production. About a third is used to produce power and a small amount is needed to make up for water lost in the burner off-gas feed. Cooling water makeup is approximately 16% of the total consumptive water use, which is needed primarily for the pyrolysis oil

vapor quench and cooling of stabilized pyrolysis oil. It is important to note that steam drum blowdown is assumed to be recycled to the cooling loop, significantly reducing raw cooling water makeup. While the water consumption values presented in Table 20 are likely in the approximate range of an actual biorefinery using this technology, there is much uncertainty around the quench process, specifically the flow rate of oil needed to provide the direct quench and the associated temperature. In addition, bio-oil yield and composition (and associated enthalpies), fluidized gas rate for the pyrolysis reactor, and quench temperature are all inter-related variables and can have a significant effect on cooling water consumption for the quench process.

Wastewater quantity and composition are important sustainability metrics, as treated facility wastewater is ultimately discharged to streams or lakes in the region and both of these factors can affect the health of local water resources. In addition, wastewater treatment, whether located onsite or offsite at a publicly owned treatment works, or both, as is assumed in this report, requires additional energy and materials. The primary wastewater streams generated from fast pyrolysis and bio-oil upgrading processes are cooling tower blowdown and water separated from the stabilized bio-oil after hydrotreating. Water separated from the hydrotreated bio-oil stream originates from biomass moisture introduced into the system and water produced during the pyrolysis and hydrotreating reactions. This stream accounts for 60-65% of the total wastewater generated for the conversion process. Cooling system blowdown accounts for the remainder of the total plant wastewater. Efforts are underway to better characterize the hydrotreater wastewater.

6.4 Metrics for High Ash Content Scenario

Conversion stage sustainability metrics for the high ash content scenario (see Section 5.2) are presented and compared to the base case (low ash) in Table 22.

Table 22. Effect of Higher Ash on Sustainability Metrics for Fast Pyrolysis and Upgrading.

| Sustainability Metric | 0.9% Ash (Base) | 1.9% Ash |
|--|-----------------|-----------|
| GHGs (g CO ₂ -e/MJ fuel: fossil emissions; biogenic emissions) ¹ | 18.9; 85 | 11.5; 101 |
| Fossil Energy Consumption (MJ fossil energy/MJ fuel product) ² | 0.301 | 0.159 |
| Total Fuel Yield (gal/dry ton wood; gge/dry ton wood) | 84; 87 | 75; 79 |
| Biomass Carbon-to-Fuel Efficiency (C in fuel/C in biomass) | 47% | 42% |
| Water Consumption (m ³ /day; gal/GGE) ³ | 1050; 1.4 | 983; 1.5 |
| Wastewater Generation (m ³ /day; gal/GGE) ⁴ | 932; 1.3 | 852; 1.3 |

¹ Biogenic emissions include those contained in the char combustor exhaust, the heat from which is used in the biomass dryer (not part of the conversion plant).

² Fossil energy consumption does not include grinding of the feedstock prior to the pyrolysis step.

³ Water consumption and wastewater generation include only direct use/emissions and do not include water associated with upstream production of materials and energy used at the plant.

⁴ Wastewater generation includes both wastewater from hydrotreating and blowdown from the cooling towers.

Fossil GHGs and energy consumption for the high ash case are lower than the base case by 40% and 53%, respectively. Fuel yield for the high ash case is lower than the base case by 11%. As discussed in Section 3.1, higher ash content in the feedstock can cause an increase in gas production at the expense of condensable liquid (see Table 3) from fast pyrolysis. With the assumed increase in off-gas production to the hydrogen plant, less natural gas is needed, leading to lower fossil GHGs for the conversion plant, as illustrated in Figure 15. The tradeoff between fuel yield and natural gas-based GHGs for this pathway has been shown previously (Jones 2013) and is an important consideration in designing fuels that are optimized for both economic and environmental goals


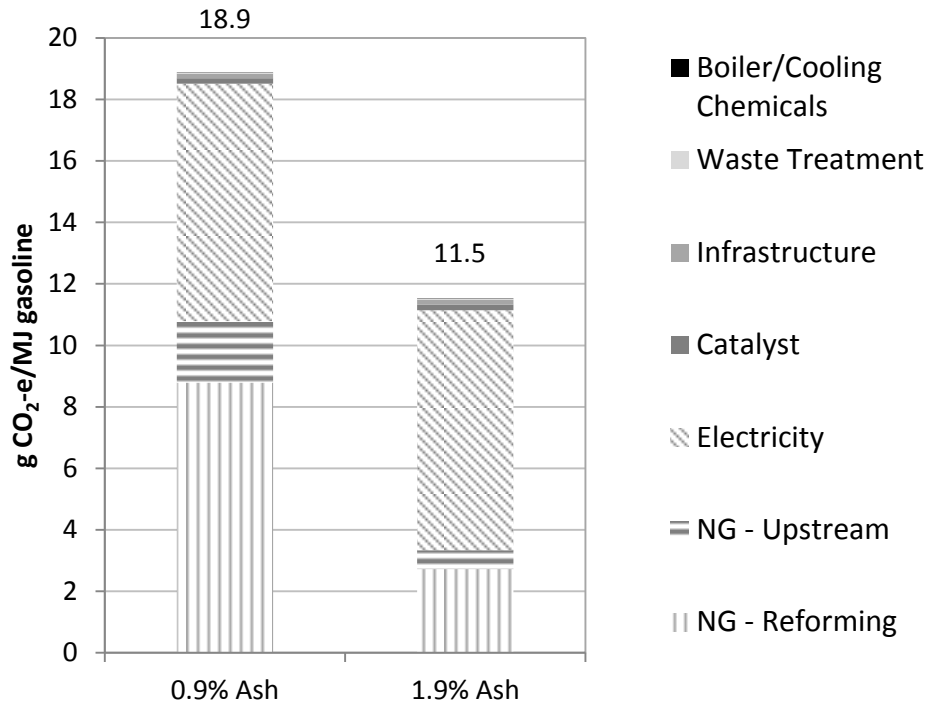


Figure 14. Effect of Biomass Ash Content on Conversion GHGs

Cooling water flowrate is lower for the high ash case because there is less pyrolysis oil product to condense than in the base case. Boiler feedwater flowrate is higher for the high ash case than the base case, with total water consumption for the two cases being equal. Lower fuel yields for the high ash case results in higher water consumption on a gallon-per-gallon basis. Daily wastewater generation is lower for the high ash case because less pyrolysis oil is being hydrotreated than in the base case, however, on a gallon-per-gallon basis, the two cases are equivalent.

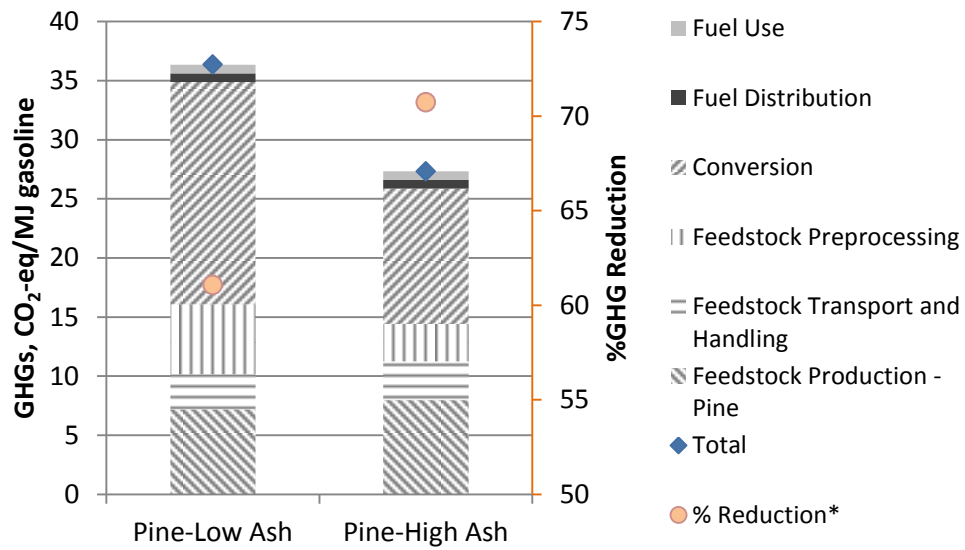Figure 16 compares the total lifecycle GHGs for southern pine based fuel for the base case and high ash case. Total emissions for the high ash case are 27.3 gCO₂-eq/MJ gasoline, corresponding to a 71% reduction from the GREET 2005 petroleum baseline. As shown, while lower yields reduce conversion GHGs (fossil), there is also an opposite but lesser effect on feedstock production GHGs. It is also important to note that because de-ashing is not used for the high ash case, feedstock preprocessing GHGs are lower than the base case.



*GHG reductions relative to GREET 2005 gasoline baseline, 93.4 g CO₂-e/MJ. Qualification for RFS is ultimately determined by the EPA.

Figure 15. Effect of Biomass Ash Content on Lifecycle GHGs (for pine feedstock)

7. Conclusions and Recommendations

This analysis shows that biomass derived liquid transportation fuels have the potential to be competitive with their fossil derived equivalents. However, there are a number of gaps that need to be addressed by future research for this pathway to be realized. Progress towards their resolution will be tracked through the annual state of technology assessments.

There is a need for a better understanding of feedstock quality and how it affects the conversion processes. It is known that ash content and volatile carbon content can have adverse effects on the yield of pyrolysis oil. Furthermore, it is not total ash content but rather the speciation and transport of the elemental ash components that must be understood in order to enable the concomitant relationship between feedstock characteristics at low cost and the optimal conversion process. An interesting technology for conversion to aid with the ash issue will be hot filtration. Ash carried with the bio-oil can also affect the life and performance of the upgrading catalysts. Research is needed to investigate mixed biomass feedstocks on the quality and yields of pyrolysis oil and upgraded oil. It would also be useful to consider blends with non-edible oil crops and to investigate biomass thermal pretreatment (time and temperature) to improve oil quality (torrefaction is just one example of this type of treatment).

Understanding the effects of catalyst use during fast pyrolysis will be the subject of another design report in FY14. It is mentioned here, because mild to medium conversion in this step could improve the life of the downstream upgrading catalysts and improve economics by requiring less severe hydrotreating and possible less expensive metallurgy as well as elimination of the stabilizer bed. An important part of this will be to understand how to capture small carbon fragments (C₄ minus) before they are hydrogenated to hydrocarbons, and how to convert them into fuel range molecules.

The upgrading steps are expensive. Eliminating one of the reactor steps and operating at pressures below 2000 psia will reduce the capital costs. Research is needed to understand what the true operating pressure limit is. More reactive catalysts are needed to allow increased space velocity and increased activity at lower temperatures. Also, catalyst life is still relatively short relative to the target life of one year. It is known that there is a loss of activity in the upgrading catalysts. Mechanisms of deactivation (carbon occlusion, migration of inorganic species) remain an opportunity waiting to be understood in order to accelerate the development of performance enhanced robust catalysts. Strategies are needed to minimize catalyst deactivation and/or develop regeneration methods. Supports such as alumina may not perform well in an aqueous environment at the given operating temperatures. While carbon supports are better able to handle aqueous environments, they also pose regeneration challenges if the means of deactivation is carbon polymerization. A better understanding of reactor heat management may also improve catalyst life and provide insight into reactor scaling.

Product quality requires further investigation. There is a need to better understand how to co-produce a jet cut that does not add additional processing steps and does not reduce the quality of the gasoline and diesel boiling range products. It is difficult to simultaneously make good octane gasoline and good cetane diesel without additional processing. Additional intermediate and final product testing is needed for the following reasons:

- Current product analysis is limited to density, ultimate analysis, Total Acid Number (TAN), distillation curves, and GC/MS analysis. There are limitations associated with each of these tests. For example, TAN analysis results include acids and phenols. Are the phenols a corrosion concern? GC/MS only identifies compounds that can be volatilized.
- Analyses are currently conducted on the whole hydrotreated oil product. Similar analysis should be obtained for each product cut.
- Characterization is needed of the heavier than diesel portion that is not properly analyzed by GC/MS. Conradson Carbon Residue analysis, for example, may provide an indication of coking tendencies.
- Fuel standard analyses such as flash, octane, cetane, freeze, smoke etc. will allow determination of how to meet product blendstock specifications.

Lastly, working with refiners is key to understanding blending issues and to developing standards for fuels and fuel intermediates that could be finished in a refinery.

8. References

ACD/Labs Software Boiling Point Predictor, Advanced Chemistry Development Inc.
<http://www.acdlabs.com/resources/ilab/>

Aden, A., M. Ruth, K. Ibsen, J. Jechura, K. Neeves, J. Sheehan, B. Wallace, L. Montague, A. Slayton, and J. Lukas. 2002. "Lignocellulosic biomass to ethanol process design and economics utilizing co-current dilute acid prehydrolysis and enzymatic hydrolysis for corn stover." NREL/TP-510-32438, National Renewable Energy Laboratory, Golden, CO. Accessed at <http://www.nrel.gov/docs/fy02osti/32438.pdf>.

Al-Sabawi, M. and J. Chen. 2012. "Hydroprocessing of Biomass-Derived Oils and Their Blends with Petroleum Feedstocks: A Review." *Energy & Fuels*, 26(9): 5373-5399.

"Greenhouse Gas, Regulated Emissions, and Energy Use in Transportation Model." Version: GREET_2012, Argonne National Laboratory, Argonne, IL.

Apanel, George, H.A. Wright. 2012. "System and method for dual fluidized bed gasification," U.S. Patent No. US 8,241,523 B2, Aug 14, 2012.

Aspentech, 2013. Capital Cost Estimator. Accessed at <http://www.aspentech.com/products/aspentechbase.aspx>.

Basu, Prabir. 2010. *Biomass Gasification and Pyrolysis - Practical Design and Theory*. Elsevier. Accessed at: <http://app.knovel.com/hotlink/toc/id:kpBGPPDT0B/biomass-gasification>

Bayerbach, Rolf. 2006. "Characterization of the water-insoluble fraction from fast pyrolysis liquids (pyrolytic lignin): Part III. Molar mass characteristics by SEC, MALDI-TOF-MS, LDI-TOF-MS, and Py-FIMS." *Journal of Analytical and Applied Pyrolysis*, 77(2): 95–101.

Bioliq, 2013. Fast Pyrolysis of Biomass. Accessed at <http://www.bioliq.de/english/64.php>.

Branca, Carmen. 2003. "GC/MS characterization of liquids generated from low-temperature pyrolysis of wood." *Industrial Engineering Chemistry Research*, 42(14): 3190–3202.

Bridgwater, Anthony, Czernik S, Diebold J, Meier D, Oasmaa A, Peacocke C, Piskorz J, Radlein D. *Fast Pyrolysis of Biomass: A Handbook, Volume 1*: (UK: CPL Press, 1999)

Bridgwater, Anthony, A.J. Toft, and J.G. Brammer. 2002. "A techno-economic comparison of cower production by biomass fast pyrolysis with gasification and combustion." *Renewable & Sustainable Energy Reviews*, 6:181-248.

Bridgwater, Anthony, editor. *Fast Pyrolysis of Biomass: A Handbook, Volume 2*: UK: CPL Press, 2002 reprinted 2008.

Biomass Technology Group, 2013. Overview. Accessed at <http://www.btgworld.com>.

Chemical Book 2013. Accessed at http://www.chemicalbook.com/ChemicalProductProperty_EN_CB3216822.htm

Chemical Engineering Magazine, 2011, Chemical Engineering Magazine Plant Cost Index available from: <http://www.che.com/pci/>.

Chemicaland, 2013. Isoeugenol. Accessed at <http://www.chemicaland21.com/specialtychem/perchem/ISOEUGENOL.htm>.

Chemstations 2013. CHEMCAD 6.5. Accessed at www.chemstations.com.

Chu, Sheng. 2013. "The pyrolysis chemistry of a β -O-4 type oligomeric lignin model compound." Green Chemistry, 15: 125-136.

Coll'Energia 2013. Overview. Accessed at http://www.collenergia.com/elaborati_studio.shtml.

CRC 2013. Handbook of Chemistry and Physics. 94th Edition. Accessed at <http://www.hbcernetbase.com/>.

Desisto, William, N. Hill, S. Beis, S Mukkamala, J. Joseph, C. Baker, T. Ong, E. Stemmler, M. Wheeler, B. Frederick, A. van Heiningen. 2010. "Fast pyrolysis of pine sawdust in a fluidized-bed reactor." Energy & Fuels, 24 (4): 2642–2651.

Djokic, Marko, T Dijkmans, G. Yildiz, W. Prins, K. Van Geem. 2012. "Quantitative analysis of crude and stabilized bio-oils by comprehensive two-dimensional gas-chromatography." Journal of Chromatography A, 1257: 131–140.

Biomass Multi-Year Program Plan. U.S. Department of Energy Bioenergy Technologies Office, Energy Efficiency and Renewable Energy, U.S. Department of Energy, Washington D.C. Accessed at http://www1.eere.energy.gov/biomass/pdfs/biomass_program_mypp.pdf

Domalski, Eugene. 1972. "Selected values of heats of combustion and heats of formation of organic compounds containing the elements C,H,N,O,P and S." Journal of Physical Chemistry Reference Data, 1(2):221-277.

Dortmund 2013. DDBST GmbH Thermophysical Data for Process Design. Accessed at <http://www.ddbst.com/>

Dutta, Abhijit, Talmadge, M., Hensley, J., Worley, M., Dudgeon, D., Barton, D., Groenendijk, P., Ferrari, D., Stears, B., Searcy, E., Wright, C., Hess, J.R. 2011. "Process design and economics for conversion of lignocellulosic biomass to ethanol: thermochemical pathway by indirect gasification and mixed alcohol synthesis." National Renewable Energy Laboratory, Golden CO. Accessed at <http://www.nrel.gov/docs/fy11osti/51400.pdf>.

Dutta, Abhijit. "Syngas Mixed Alcohol Cost Validation" Presented at the Bioenergy Technologies Office Project Peer Review, May 21, 2013, Alexandria, VA. Accessed at https://www2.eere.energy.gov/biomass/peer_review2013/Portal/Gasification/#

EcoInvent 2011. EcoInvent Database Version 2.2, Hamburg, Germany: Swiss Center for Life Cycle Inventories.

Energy Information Administration, 2011 Industrial Natural Gas Prices. Accessed at <http://www.eia.gov/naturalgas/data.cfm#prices> .

Energy Information Administration, 2011 Industrial Electricity Prices. Accessed at <http://www.eia.gov/electricity/data.cfm#sales>.

Ensyn 2012. ENSYN Overview. Accessed at <http://www.ensyn.com/about.htm>.

Envergent 2009. Envergent Technologies Overview. Accessed at <http://www.envergenttech.com/faq.php>.

Elliott, Douglas. 2007. "Historical developments in hydroprocessing bio-oil." *Energy & Fuels* (2007) 21:1792-1815.

Elliott, Douglas, T. Hart, G. Neuenschwander, L. Rotness, M. Olarte, A. Zacher, Y. Solantausta. 2012. "Catalytic hydroprocessing of fast pyrolysis bio-oil from pine sawdust." *Energy Fuels*, 26(6): 3891–3896.

Elliott, Douglas. 2013. "Transportation fuels from biomass via fast pyrolysis and hydroprocessing." *WIREs Energy and Environment*, 2(5): 525-533.

Fortum, 2013. Accessed at <http://www.fortum.com/en/energy-production/fuels/bio-oil/Pages/default.aspx>.

Freel, Barry, R. Graham. "Method and apparatus for a circulating bed transport fast pyrolysis reactor system." Ensyn Technologies Inc., U.S. Patent 5,792,340. August 11, 1998.

Frey, Stanely, R. Gattupalli, T. Brandvold. "Methods and apparatuses for forming low-metal biomass-derived pyrolysis oil." UOP LLC, U.S. Patent Application 2012/0317871 A1, December 20, 2012.

Gregoire, Catherine, R. Bain. "Technoeconomic analysis of the production of biocrude from wood." *Biomass and Bioenergy* (1994) 7(1–6): 275–283.

Garcia-Perez, Manuel, S. Wang, M., J. Shen, M. Rhodes, W-J. Lee, C-Z Li. 2008. "Effects of temperature on the formation of lignin-derived oligomers during the fast pyrolysis of mallee woody biomass." *Energy & Fuels* 22(3):2022–2032.

H2A 2013. DOE EERE Fuel Cell and Hydrogen Program. Accessed at http://www.hydrogen.energy.gov/h2a_delivery.html .

Hess, J. Richard, C. Wright, K. Kenney, E. Searcy. 2009. "Uniform-format Solid Feedstock Supply System: A Commodity-Scale Design to Produce an Infrastructure-Compatible Bulk Solid from Lignocellulosic Biomass," INL/EXT-08-14752, Idaho National Laboratory, Idaho Falls, ID. Accessed at www.inl.gov/bioenergy/uniform-feedstock .

Heywood, John. *Internal Combustion Engine Fundamentals*, McGraw-Hill, 1998. Singapore.

Humbird, David, R. Davis, L. Tao, C. Kinchin, D. Hsu, A. Aden. 2011. "Process Design and Economics for Biochemical Conversion of Lignocellulosic Biomass to Ethanol Dilute-Acid Pretreatment and

Enzymatic Hydrolysis of Corn Stover.” NREL/TP-5100-47764, National Renewable Energy Laboratory, Golden, CO. Accessed at <http://www.nrel.gov/docs/fy11osti/47764.pdf> .

IEA 2007, “Biomass Pyrolysis”, International Energy Agency Bioenergy Task 34 Publication, T34:2007:01, www.ieabioenergy.com/Download.aspx?DocId=5417 .

Jones, Susanne, C. Valkenburg, C. Walton, D. Elliott, J. Holladay, D. Stevens, C. Kinchin, S. Czernik. 2009. “Production of gasoline and diesel from biomass via fast pyrolysis, hydrotreating and hydrocracking: a design case.” PNNL-18284 Pacific Northwest National Laboratory, Richland, WA http://www.pnl.gov/main/publications/external/technical_reports/PNNL-18284.pdf

Jones, Susanne, L. Snowden-Swan. 2013. “Production of gasoline and diesel from biomass via fast pyrolysis hydrotreating and hydrocracking: 2012 state of technology and projections to 2017.” PNNL-22684, Pacific Northwest National Laboratory, Richland WA

Johnson, Warren, G. Yavari, D. Radelin. “Apparatus for separating fouling contaminants from non-condensable gases at the end of a pyrolysis/thermolysis of biomass process.” Dynamotive Energy Systems Corp. U.S. Patent 7,004,999 B2. February 28, 2006.

Kai, S, E. Kuoppala, F. Leena, A. Oasmaa. 1998. “Characterization of biomass-based flash pyrolysis oils.” Biomass and Bioenergy, 14(2):103–113.

KDF 2013. Bioenergy Knowledge Discovery Framework,” U.S. Department of Energy, <https://www.bioenergykdf.net/> .

Kim, Kwang, T-S. Cho, J. Choi. 2012. “Influence of pyrolysis temperature on physicochemical properties of biochar obtained from the fast pyrolysis of pitch pine (*Pinus rigida*).” Bioresource Technology, 118:158–162.

Kim, Kwang, I. Eom, S. Lee, D. Choi, H. Yeo, I-G. Choi, J. Choi. 2011. “Investigation of physicochemical properties of biooils produced from yellow poplar wood (*Liriodendron tulipifera*) at various temperatures and residence times.” Journal of Analytical and Applied Pyrolysis, 92(1):2–9.

LCI 2012. U.S. Life-Cycle Inventory, v1.1 National Renewable Energy Technology Laboratory, Golden CO. Accessed at <https://www.lcacommons.gov/nrel/search> .

Liu, Yang, Q. Shi, Y. Zhang, Y. He, K. Chung, S. Zhao, C. Zu. 2012. “Characterization of red pine pyrolysis bio-oil by gas chromatography–mass spectrometry and negative-ion electrospray ionization fourier transform ion cyclotron resonance mass spectrometry.” Energy & Fuels, 26(7):4532–4539.

Marker Terry, J. Petri, T. Kalnes, M. McCall, D. Mackowiak, B. Jerosky, B. Regan, L. Nemeth, M. Krawczyk, S. Czernik, D. Elliot, D. Shonnard. “Opportunities for biorenewables in oil refineries.” UOP, Des Plaines, Illinois. Accessed at http://www.osti.gov/energycitations/product.biblio.jsp?osti_id=861458 .

Meyer, Robert. Handbook of Petroleum Refining Processes. 3rd ed. 2004. McGraw-Hill, New York.

Meier, Dietrich, B. van de Beld, A. Bridgwater, D. Elliott, A. Oasmaa, F. Preto. 2013. "State-of-the-art of fast pyrolysis in IEA bioenergy member countries." *Renewable and Sustainable Energy Reviews*, 20:619-641.

Mullen, Charles, G. Strahan, A. Boateng. 2009. "Characterization of various fast pyrolysis bio-oils by NMR spectroscopy." *Energy & Fuels*, 23:2707-2719.

Muth 2013a. Muth, David, C. Wright, E. Searcy, J. Jacobson, K. Cafferty. "Achieve a modeled delivered feedstock cost of \$55.77/DM ton with a quality specification of 10% Moisture Content, 2 mm particle size, and <1% ash." INL/EXT-13-29694, Idaho National Laboratory, Idaho Falls, ID.

Muth 2013b. Muth, David, J. Jacobson, K. Cafferty, R. Jeffers, "Feedstock pathways for bio-oil and syngas conversion pathways." TM2013-002-0, Idaho National Laboratory, Idaho Falls, ID.

Oasmaa, Anja, Y. Solantausta, V. Arpiainen, E. Kuoppala, K. Sipilä. 2010. "Fast pyrolysis bio-oils from wood and agricultural residues." *Energy & Fuels*, 24(2):1380–1388.

Perlack, Robert, B. Stokes. 2011. "U.S. billion-ton update: biomass supply for a bioenergy and bioproducts industry." Oak Ridge National Laboratory, Oak Ridge TN. ORNL/TM-2011/224. Accessed at http://www1.eere.energy.gov/biomass/pdfs/billion_ton_update.pdf.

Peacocke, George, C. Dick, R. Hague, L. Cooke, A. Bridgwater. 1997. "Comparison of ablative and fluid bed fast pyrolysis products: yields and analyses." In *Developments in Thermochemical Biomass Conversion*, Vol. 1. A. Bridgwater, editor, Blackie Academic and Professional, London.

PGM 2013. Platinum Today, <http://www.platinum.matthey.com/>. Accessed June 2013.

Phillips, Steven, A. Aden, J. Jechura, D. Dayton, T. Eggman. 2007. "Thermochemical ethanol via indirect gasification and mixed alcohol synthesis of lignocellulosic biomass." NREL/TP-510-41168 National Renewable Energy Laboratory, Golden, CO <http://www.nrel.gov/docs/fy07osti/41168.pdf>

Schobert, Harold. H. *Coal Science and Technology*, Preface Volume 23. 1995. Elsevier.

Searcy, Erin, J. Hess. 2010. "Uniform-format feedstock supply system: commodity-scale design to produce an infrastructure-compatible biocrude from lignocellulosic biomass." INL/EXT-10-20372 Rev 0 DRAFT. Idaho National Laboratory, Idaho Falls, ID. Accessed at www.inl.gov/bioenergy/uniform-feedstock.

Searcy, E. 2011. Email communication with S. Jones PNNL.

SimaPro 2011. SimaPro, v.7.3; Product Ecology Consultants: Amersfoort, the Netherlands, 2011.

Solantausta, Yrjö. 2003. "Techno-economic assessment, the finnish case study." COMBIO Project NNE5-CT-00604, VTT Technical Research Centre of Finland. Accessed at <http://www.combio-project.com/economics.htm> .

Spath, Pamela, A. Aden, T. Eggeman, M. Ringer, B. Wallace, and J. Jechura. 2005. "Biomass to hydrogen production detailed design and economics utilizing the Battelle Columbus Laboratory

indirectly-heated gasifier.” NREL/TP-510-37408, National Renewable Energy Laboratory, Golden, CO. Accessed at <http://www.nrel.gov/docs/fy05osti/37408.pdf> .

SRI 2007. “Hydrogen production from natural gas.” PEP Yearbook, Vol 1E, SRI International, Menlo Park, California.

Thangalazhy-Gopakumar, Suchithra. 2010. “Physiochemical properties of bio-oil produced at various temperatures from pine wood using an auger reactor.” *Bioresource Technology*, 101(21):8389–8395.

Templeton, David, A. Sluiter, T. Hayward, B. Hames, S. Thomas. 2009. “Assessing corn stover composition and sources of variability via NIRS.” *Cellulose*. 16:621-39.

Trebbi Giuliano. 1997. “Plans for the production and utilization of bio-oil from biomass fast pyrolysis.” In *Developments in Thermochemical Biomass Conversion*, Vol. 1. A. Bridgwater, editor, Blackie Academic and Professional, London.

Tziotzios, George, S. Michailakis, D.Vayenas. 2007. “Aerobic biological treatment of olive mill wastewater by olive pulp bacteria.” *International Biodeterioration & Biodegradation*, 60(4):209–214.

U.S. Life Cycle Inventory Database. 2012. National Renewable Energy Laboratory. Accessed November 19, 2012: <https://www.lcacommons.gov/nrel/search>.

Venderbosch, Robbie, A. Ardiyanti, J. Wildschut, A. Oasmaa A., H. Heeres. 2010. “Stabilization of biomass-derived pyrolysis oils.” *Journal of Chemical Technology and Biotechnology*, 85(5):674-686.

Vispute, Tushar, G. Huber. 2009. “Production of hydrogen, alkanes and polyols by aqueous phase processing of wood-derived pyrolysis oils.” *Green Chemistry*, 11:1433-1445.


Wang, Huamin, J. Male, Y. Wang. 2013. “Recent advances in hydrotreating of pyrolysis bio-oil and its oxygen-containing model compounds.” *ACS Catalysis*, 3(5):1047–1070.


Worley, Matt, J. Yale. 2012. “Biomass gasification technology assessment: consolidated report.” NREL/SR-5100-57085 National Renewable Energy Laboratory, Golden, CO. Accessed at <http://www.nrel.gov/docs/fy13osti/57085.pdf>.

Zacher, Alan, M. Olarte, D. Santosa, D. Elliott, S. Jones. 2013. “A review and perspective of recent bio-oil hydrotreating research.” *Green Chemistry*, DOI: 10.1039/C3GC41382A.

| | | | | | | | | | | | | | | | | | | | | | | | |
|--------------------------|--------|--------|--------|--------|--------|--------|---------|---------|---------|--------|--------|------|---------|--------|--------|--------|--------|--------|-----------|-----------|-----------|--------|--|
| Stream No. | 80 | 81 | 90 | 92 | 93 | 100 | 101 | 111 | 113 | 120 | 121 | 122 | 125 | 126 | 127 | 128 | 129 | 130 | 131 | 136 | 138 | 139 | |
| Temp F | 90 | 118 | 68 | 584 | 161 | 160 | 931 | 813 | 813 | 90 | 163 | 60 | 1128 | 1128 | 1128 | 1048 | 800 | 813 | 158 | 140 | 140 | 140 | |
| Pres psia | 14.7 | 16.7 | 14.7 | 16.7 | 15.7 | 20.7 | 20.7 | 17.7 | 17.7 | 15.0 | 20.7 | 17.7 | 20.7 | 20.7 | 20.7 | 20.7 | 20.7 | 17.7 | 17.7 | 25.0 | 25.0 | 25.0 | |
| Vapor mole frac. | 1.00 | 1.00 | 0.00 | 1.00 | 1.00 | 0.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0.00 | 0.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0.00 | 0.00 | 0.00 | 0.00 | |
| Total lb/h | 190000 | 190000 | 262454 | 572662 | 626345 | 204130 | 3419818 | 3419818 | 2686288 | 347400 | 347400 | 285 | 2664538 | 384637 | 382662 | 382662 | 382662 | 733530 | 2.012E+07 | 2.012E+07 | 2.000E+07 | 119715 | |
| Flow rates in lb/h | | | | | | | | | | | | | | | | | | | | | | | |
| Wood | 0 | 0 | 182028 | 0 | 0 | 182028 | 182028 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | |
| Water | 3719 | 3719 | 78736 | 19234 | 72918 | 20412 | 22449 | 44495 | 0 | 6800 | 6800 | 0 | 0 | 15515 | 15515 | 15515 | 15515 | 44495 | 1102290 | 1102290 | 1095731 | 6559 | |
| Hydrogen | 0 | 0 | 0 | 0 | 0 | 0 | 178 | 555 | 369 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 185 | 0 | 0 | 0 | 0 | |
| Oxygen | 43108 | 43108 | 0 | 59168 | 59168 | 0 | 0 | 1446 | 1446 | 78820 | 78820 | 0 | 0 | 16060 | 16060 | 16060 | 16060 | 0 | 0 | 0 | 0 | 0 | |
| Nitrogen | 140688 | 140688 | 0 | 398228 | 398228 | 0 | 0 | 303 | 303 | 257237 | 257237 | 0 | 0 | 257540 | 257540 | 257540 | 257540 | 0 | 0 | 0 | 0 | 0 | |
| Argon | 2397 | 2397 | 0 | 6780 | 6780 | 0 | 0 | 0 | 0 | 4383 | 4383 | 0 | 0 | 4383 | 4383 | 4383 | 4383 | 0 | 0 | 0 | 0 | 0 | |
| Carbon monoxide | 0 | 0 | 0 | 0 | 0 | 0 | 253324 | 263429 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 263429 | 550 | 550 | 547 | 3 | |
| Carbon dioxide | 88 | 88 | 0 | 89151 | 89151 | 0 | 238706 | 248267 | 0 | 160 | 160 | 0 | 0 | 89063 | 89063 | 89063 | 89063 | 248267 | 5869 | 5869 | 5834 | 35 | |
| Methane | 0 | 0 | 0 | 0 | 0 | 0 | 33628 | 34970 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 34970 | 104 | 104 | 104 | 1 | |
| Ethane | 0 | 0 | 0 | 0 | 0 | 0 | 4630 | 4815 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 4815 | 75 | 75 | 74 | 0 | |
| Propane | 0 | 0 | 0 | 0 | 0 | 0 | 114 | 119 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 119 | 4 | 4 | 4 | 0 | |
| N-butane | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | |
| Ethene | 0 | 0 | 0 | 0 | 0 | 0 | 10631 | 11056 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 11056 | 168 | 168 | 167 | 1 | |
| Propene | 0 | 0 | 0 | 0 | 0 | 0 | 7407 | 7704 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 7704 | 259 | 259 | 258 | 2 | |
| 1-Butene | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | |
| Sulfur dioxide | 0 | 0 | 0 | 100 | 100 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 100 | 100 | 100 | 100 | 0 | 0 | 0 | 0 | 0 | |
| Nitrogen dioxide | 0 | 0 | 0 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | |
| Acids | 0 | 0 | 0 | 0 | 0 | 0 | 108 | 6574 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 6574 | 927661 | 927661 | 922141 | 5520 | |
| Aldehydes | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 8231 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 8231 | 1382390 | 1382390 | 1374165 | 8225 | |
| Ketones | 0 | 0 | 0 | 0 | 0 | 0 | 388 | 9794 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 9794 | 1023661 | 1023661 | 1017570 | 6091 | |
| Alcohols | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 8231 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 8231 | 1383206 | 1383206 | 1374976 | 8230 | |
| Guaiacols | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 5879 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 5879 | 986741 | 986741 | 980869 | 5871 | |
| Low MW sugars | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 7055 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 7055 | 1185642 | 1185642 | 1178587 | 7055 | |
| High MW sugars | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 39977 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 39977 | 6718603 | 6718603 | 6678626 | 39977 | |
| Extractives | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 3527 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 3527 | 592490 | 592490 | 588964 | 3525 | |
| Low MW lignin derived A | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 12934 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 12934 | 2173475 | 2173475 | 2160543 | 12933 | |
| Low MW lignin derived B | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 2606 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 2606 | 349377 | 349377 | 347298 | 2079 | |
| High MW lignin derived A | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 10804 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 10804 | 1815687 | 1815687 | 1804883 | 10804 | |
| High MW lignin derived B | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 2352 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 2352 | 395212 | 395212 | 392861 | 2352 | |
| Nitrogen compounds | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 82 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 82 | 1667 | 1667 | 1657 | 10 | |
| Sulfur compounds | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 29 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 29 | 4891 | 4891 | 4862 | 29 | |
| Sulfur | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 50 | 50 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | |
| Carbon | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 18306 | 18306 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | |
| Ash | 0 | 0 | 1690 | 0 | 0 | 1690 | 1690 | 1690 | 1561 | 0 | 0 | 0 | 0 | 1690 | 0 | 0 | 0 | 130 | 21773 | 21773 | 21644 | 130 | |
| Sand | 0 | 0 | 0 | 0 | 0 | 0 | 2664538 | 2664538 | 2664253 | 0 | 0 | 285 | 2664538 | 285 | 0 | 0 | 0 | 285 | 47925 | 47925 | 47640 | 285 | |


| | | | | | | | | | | | | | | | | | | | | | | |
|--------------------------|--------|-----------|--------|-------|-----------|-------|--------|--------|--------|--------|------|------|------|------|------|-------|--------|-------|-------|-------|-----------|-----------|
| Stream No. | 140 | 141 | 142 | 145 | 146 | 147 | 148 | 149 | 150 | 151 | 154 | 158 | 160 | 161 | 163 | 170 | 200 | 712 | 713 | 714 | 801 | 802 |
| Temp F | 158 | 113 | 113 | 113 | 110 | 113 | 113 | 162 | 162 | 130 | 162 | 130 | 60 | 211 | 211 | 162 | 130 | 283 | 498 | 501 | 90 | 110 |
| Pres psia | 18 | 18 | 18 | 35 | 30 | 18 | 18 | 23 | 23 | 18 | 23 | 18 | 18 | 18 | 18 | 23 | 18 | 685 | 680 | 675 | 60 | 55 |
| Vapor mole frac. | 1.00 | 0.00 | 1.00 | 0.00 | 0.00 | 0.00 | 1.00 | 1.00 | 1.00 | 0.00 | 1.00 | 0.00 | 0.00 | 0.00 | 0.00 | 1.00 | 0.00 | 0.00 | 0.00 | 1.00 | 0.00 | 0.00 |
| Total lb/h | 613814 | 8.015E+06 | 598591 | 15222 | 8.000E+06 | 25463 | 573128 | 573128 | 551150 | 160401 | 9900 | 5302 | 2690 | 4665 | 4665 | 12078 | 155099 | 36600 | 36600 | 36600 | 1.060E+06 | 1.060E+06 |
| Flow rates in lb/h | | | | | | | | | | | | | | | | | | | | | | |
| Wood | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Water | 37936 | 6034727 | 26475 | 11461 | 6023266 | 24357 | 2118 | 2118 | 2037 | 42377 | 37 | 1294 | 2690 | 2690 | 2690 | 45 | 41082 | 36600 | 36600 | 36600 | 1059526 | 1059526 |
| Hydrogen | 185 | 0 | 185 | 0 | 0 | 0 | 185 | 185 | 178 | 0 | 3 | 0 | 0 | 0 | 0 | 4 | 0 | 0 | 0 | 0 | 0 | 0 |
| Oxygen | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Nitrogen | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Argon | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Carbon monoxide | 263426 | 186 | 263426 | 0 | 185 | 0 | 263426 | 263426 | 253324 | 4 | 4550 | 0 | 0 | 0 | 0 | 5551 | 4 | 0 | 0 | 0 | 0 | 0 |
| Carbon dioxide | 248233 | 3997 | 248225 | 8 | 3989 | 0 | 248225 | 248225 | 238706 | 43 | 4288 | 1 | 0 | 0 | 0 | 5231 | 41 | 0 | 0 | 0 | 0 | 0 |
| Methane | 34970 | 69 | 34969 | 0 | 69 | 0 | 34969 | 34969 | 33628 | 1 | 604 | 0 | 0 | 0 | 0 | 737 | 1 | 0 | 0 | 0 | 0 | 0 |
| Ethane | 4814 | 48 | 4814 | 0 | 48 | 0 | 4814 | 4814 | 4630 | 1 | 83 | 0 | 0 | 0 | 0 | 101 | 1 | 0 | 0 | 0 | 0 | 0 |
| Propane | 119 | 2 | 119 | 0 | 2 | 0 | 119 | 119 | 114 | 0 | 2 | 0 | 0 | 0 | 0 | 2 | 0 | 0 | 0 | 0 | 0 | 0 |
| N-butane | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Ethene | 11055 | 125 | 11055 | 0 | 125 | 0 | 11055 | 11055 | 10631 | 1 | 191 | 0 | 0 | 0 | 0 | 233 | 1 | 0 | 0 | 0 | 0 | 0 |
| Propene | 7703 | 122 | 7703 | 0 | 122 | 0 | 7703 | 7703 | 7407 | 2 | 133 | 0 | 0 | 0 | 0 | 162 | 2 | 0 | 0 | 0 | 0 | 0 |
| 1-Butene | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Sulfur dioxide | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Nitrogen dioxide | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Acids | 1055 | 437572 | 224 | 831 | 436741 | 112 | 112 | 112 | 108 | 6463 | 2 | 197 | 0 | 0 | 0 | 2 | 6265 | 0 | 0 | 0 | 0 | 0 |
| Aldehydes | 5 | 2653 | 0 | 5 | 2648 | 0 | 0 | 0 | 0 | 8230 | 0 | 251 | 0 | 0 | 0 | 0 | 7979 | 0 | 0 | 0 | 0 | 0 |
| Ketones | 3703 | 1525333 | 806 | 2897 | 1522436 | 403 | 403 | 403 | 388 | 9391 | 7 | 287 | 0 | 0 | 0 | 8 | 9104 | 0 | 0 | 0 | 0 | 0 |
| Alcohols | 0 | 152 | 0 | 0 | 152 | 0 | 0 | 0 | 0 | 8231 | 0 | 251 | 0 | 0 | 0 | 0 | 7979 | 0 | 0 | 0 | 0 | 0 |
| Guaiacols | 8 | 4057 | 0 | 8 | 4049 | 0 | 0 | 0 | 0 | 5879 | 0 | 180 | 0 | 0 | 0 | 0 | 5699 | 0 | 0 | 0 | 0 | 0 |
| Low MW sugars | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 7055 | 0 | 215 | 0 | 0 | 0 | 0 | 6839 | 0 | 0 | 0 | 0 | 0 |
| High MW sugars | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 39977 | 0 | 1221 | 0 | 0 | 0 | 0 | 38756 | 0 | 0 | 0 | 0 | 0 |
| Extractives | 2 | 745 | 1 | 1 | 744 | 1 | 0 | 0 | 0 | 3527 | 0 | 108 | 0 | 0 | 0 | 0 | 3420 | 0 | 0 | 0 | 0 | 0 |
| Low MW lignin derived A | 1 | 641 | 0 | 1 | 640 | 0 | 0 | 0 | 0 | 12934 | 0 | 395 | 0 | 0 | 0 | 0 | 12539 | 0 | 0 | 0 | 0 | 0 |
| Low MW lignin derived B | 527 | 4531 | 519 | 9 | 4523 | 519 | 0 | 0 | 0 | 2606 | 0 | 80 | 0 | 0 | 0 | 0 | 2527 | 0 | 0 | 0 | 0 | 0 |
| High MW lignin derived A | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 10804 | 0 | 330 | 0 | 0 | 0 | 0 | 10474 | 0 | 0 | 0 | 0 | 0 |
| High MW lignin derived B | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 2352 | 0 | 72 | 0 | 0 | 0 | 0 | 2280 | 0 | 0 | 0 | 0 | 0 |
| Nitrogen compounds | 72 | 196 | 72 | 0 | 195 | 72 | 0 | 0 | 0 | 82 | 0 | 3 | 0 | 0 | 0 | 0 | 80 | 0 | 0 | 0 | 0 | 0 |
| Sulfur compounds | 0 | 67 | 0 | 0 | 67 | 0 | 0 | 0 | 0 | 29 | 0 | 1 | 0 | 0 | 0 | 0 | 28 | 0 | 0 | 0 | 0 | 0 |
| Sulfur | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Carbon | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Ash | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 130 | 0 | 130 | 0 | 1690 | 1690 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Sand | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 285 | 0 | 285 | 0 | 285 | 285 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

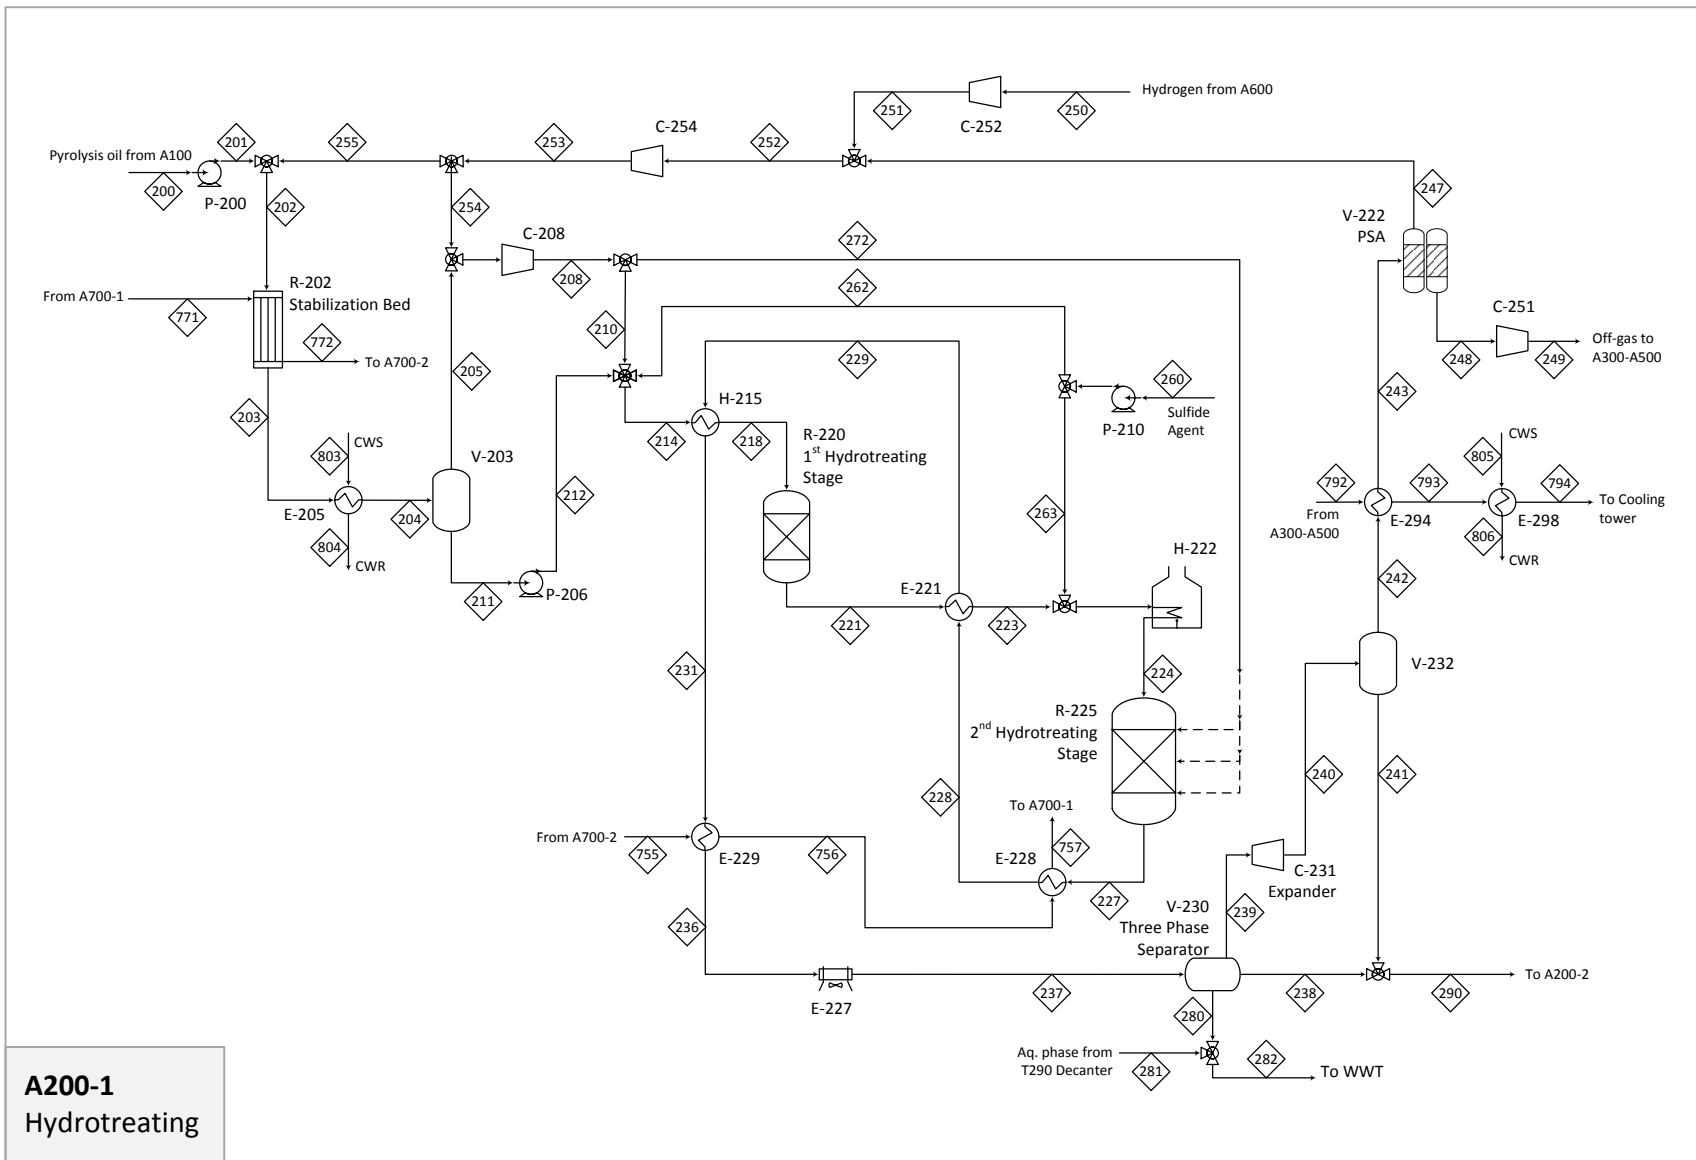

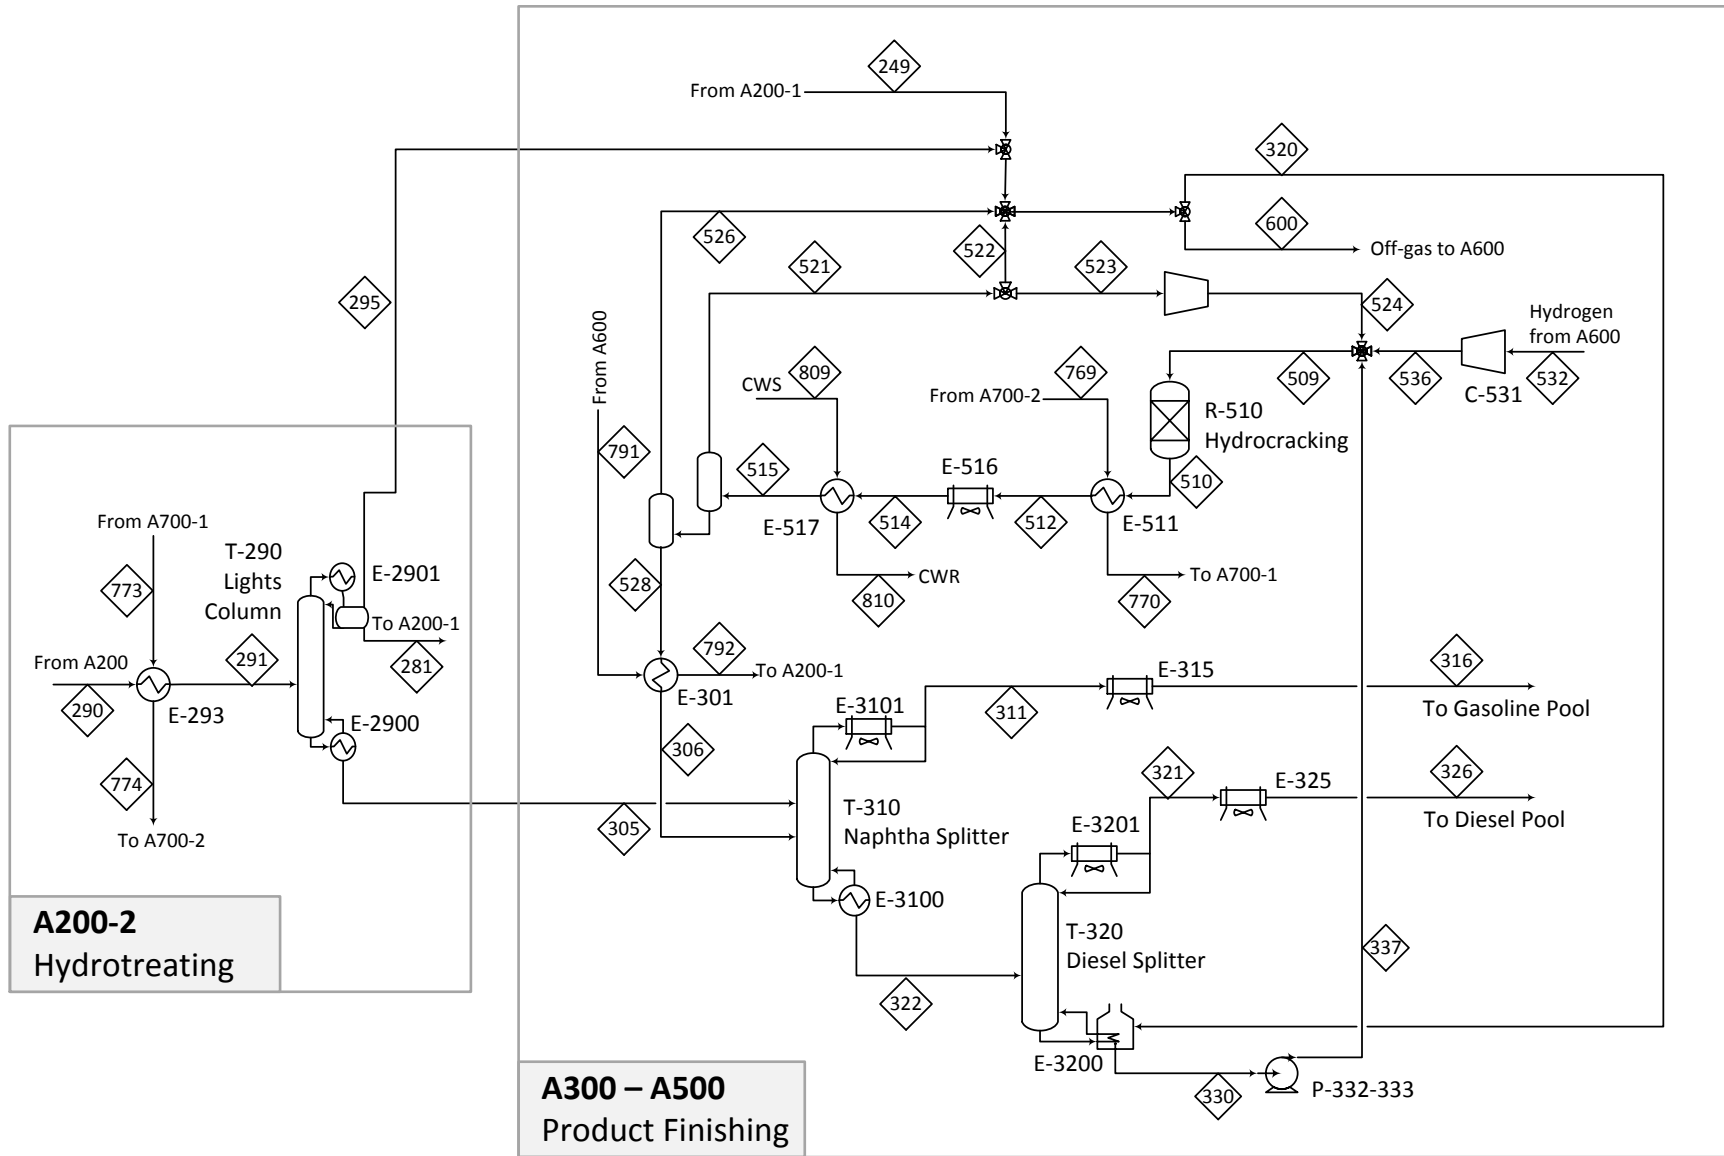


| | | | | | | | | | | | | | | | | | | | |
|--------------------------------------|-------|-----|-------|-------|------|-------|-------|-------|-------|------|-------|-------|-------|------|------|-------|-------|-------|-------|
| Stream No. | 249 | 281 | 290 | 291 | 295 | 305 | 306 | 311 | 316 | 320 | 321 | 322 | 326 | 330 | 337 | 509 | 510 | 512 | 514 |
| Temp F | 268 | 35 | 157 | 300 | 138 | 336 | 300 | 149 | 149 | 258 | 347 | 400 | 150 | 678 | 685 | 382 | 1379 | 485 | 150 |
| Pres psia | 50 | 31 | 755 | 750 | 65 | 67 | 46 | 25 | 15 | 50 | 15 | 25 | 15 | 15 | 1295 | 1295 | 1270 | 1270 | 1260 |
| Vapor mole frac. | 1 | 0 | 0.00 | 0.00 | 1.00 | 0.00 | 0.00 | 0.00 | 0.00 | 1.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.94 | 1.00 | 0.93 | 0.73 |
| Total lb/h | 33702 | 397 | 53350 | 53350 | 3325 | 49674 | 10560 | 22234 | 22234 | 1172 | 28400 | 38001 | 28400 | 9600 | 9600 | 11166 | 11166 | 11166 | 11166 |
| Flow rates in lb/h | | | | | | | | | | | | | | | | | | | |
| Water | 66 | 397 | 397 | 397 | 46 | 0 | 0 | 0 | 0 | 4 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Hydrogen | 2163 | 0 | 4 | 4 | 4 | 0 | 0 | 0 | 0 | 69 | 0 | 0 | 0 | 0 | 0 | 1516 | 541 | 541 | 541 |
| Carbon monoxide | 624 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 20 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Carbon dioxide | 12495 | 0 | 23 | 23 | 23 | 0 | 0 | 0 | 0 | 396 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Methane | 5961 | 0 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 189 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Ethane | 5074 | 0 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 160 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Propane | 2401 | 0 | 596 | 596 | 596 | 0 | 0 | 0 | 0 | 95 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| N-butane | 1752 | 0 | 1260 | 1260 | 1260 | 0 | 0 | 0 | 0 | 95 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| N-pentane | 1350 | 0 | 2623 | 2623 | 1390 | 1233 | 0 | 1233 | 1233 | 87 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Ethene | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Propene | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Hydrogen sulfide | 17 | 0 | 4 | 4 | 4 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Acids | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Extractives | 0 | 0 | 0 | 0 | 0 | 0 | 70 | 0 | 0 | 0 | 0 | 70 | 0 | 70 | 70 | 70 | 70 | 70 | 70 |
| Low MW lignin derived A | 0 | 0 | 0 | 0 | 0 | 0 | 252 | 0 | 0 | 0 | 0 | 252 | 0 | 252 | 252 | 252 | 252 | 252 | 252 |
| Low MW lignin derived B | 0 | 0 | 1 | 1 | 0 | 1 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 |
| High MW lignin derived A | 0 | 0 | 0 | 0 | 0 | 0 | 4 | 0 | 0 | 0 | 0 | 4 | 0 | 4 | 4 | 4 | 4 | 4 | 4 |
| High MW lignin derived B | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 1 | 0 | 1 | 1 | 1 | 1 | 1 | 1 |
| Nitrogen compounds | 0 | 0 | 79 | 79 | 0 | 79 | 0 | 0 | 0 | 0 | 79 | 79 | 79 | 0 | 0 | 0 | 0 | 0 | 0 |
| Sulfur compounds | 0 | 0 | 13 | 13 | 0 | 13 | 224 | 0 | 0 | 0 | 13 | 237 | 13 | 224 | 224 | 224 | 224 | 224 | 224 |
| Acids intermediates | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Carbonyl intermediates | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Low MW lignin compound intermediates | 0 | 0 | 0 | 0 | 0 | 0 | 269 | 0 | 0 | 0 | 0 | 269 | 0 | 269 | 269 | 269 | 269 | 269 | 269 |
| Short chain n-paraffins | 1033 | 0 | 5361 | 5361 | 0 | 5361 | 0 | 5361 | 5361 | 33 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Medium chain n-paraffins | 2 | 0 | 3078 | 3078 | 0 | 3078 | 0 | 0 | 0 | 0 | 3078 | 3078 | 3078 | 0 | 0 | 0 | 0 | 0 | 0 |
| Iso-paraffin A | 184 | 0 | 1964 | 1964 | 0 | 1964 | 0 | 1964 | 1964 | 6 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Iso-paraffin B | 19 | 0 | 3096 | 3096 | 0 | 3096 | 0 | 1 | 1 | 1 | 3095 | 3095 | 3095 | 0 | 0 | 0 | 0 | 0 | 0 |
| Cyclo C5 A | 114 | 0 | 1913 | 1913 | 0 | 1913 | 0 | 1913 | 1913 | 4 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Cyclo C5 B | 85 | 0 | 2533 | 2533 | 0 | 2533 | 0 | 2530 | 2530 | 3 | 3 | 3 | 3 | 0 | 0 | 0 | 0 | 0 | 0 |
| Cyclo C6 A | 295 | 0 | 2454 | 2454 | 0 | 2454 | 0 | 2454 | 2454 | 9 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Cyclo C6 B | 7 | 0 | 1850 | 1850 | 0 | 1850 | 0 | 0 | 0 | 0 | 1850 | 1850 | 1850 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bicyclos | 1 | 0 | 1698 | 1698 | 0 | 1698 | 0 | 0 | 0 | 0 | 1698 | 1698 | 1698 | 0 | 0 | 0 | 0 | 0 | 0 |
| Cyclo C7+ | 4 | 0 | 1735 | 1735 | 0 | 1735 | 0 | 0 | 0 | 0 | 1735 | 1735 | 1735 | 0 | 0 | 0 | 0 | 0 | 0 |
| Aromatic A | 43 | 0 | 3978 | 3978 | 0 | 3978 | 0 | 592 | 592 | 1 | 3386 | 3386 | 3386 | 0 | 0 | 0 | 0 | 0 | 0 |
| Aromatic B | 4 | 0 | 1682 | 1682 | 0 | 1682 | 0 | 0 | 0 | 0 | 1682 | 1682 | 1682 | 0 | 0 | 0 | 0 | 0 | 0 |
| Phenanthrenes | 0 | 0 | 3247 | 3247 | 0 | 3247 | 0 | 0 | 0 | 0 | 1 | 3247 | 1 | 3246 | 3246 | 3246 | 0 | 0 | 0 |
| Pyrenes | 0 | 0 | 3141 | 3141 | 0 | 3141 | 0 | 0 | 0 | 0 | 0 | 3141 | 0 | 3141 | 3141 | 3141 | 0 | 0 | 0 |
| Diphenyl compounds | 0 | 0 | 542 | 542 | 0 | 542 | 0 | 0 | 0 | 0 | 542 | 542 | 542 | 0 | 0 | 0 | 0 | 0 | 0 |
| Indans | 3 | 0 | 866 | 866 | 0 | 866 | 0 | 0 | 0 | 0 | 866 | 866 | 866 | 0 | 0 | 0 | 0 | 0 | 0 |
| Indenes | 0 | 0 | 648 | 648 | 0 | 648 | 0 | 0 | 0 | 0 | 648 | 648 | 648 | 0 | 0 | 0 | 0 | 0 | 0 |
| 1,2,3,4-Naphthalenes | 0 | 0 | 1263 | 1263 | 0 | 1263 | 0 | 0 | 0 | 0 | 1263 | 1263 | 1263 | 0 | 0 | 0 | 0 | 0 | 0 |
| Naphthalenes | 0 | 0 | 2173 | 2173 | 0 | 2173 | 0 | 0 | 0 | 0 | 2173 | 2173 | 2173 | 0 | 0 | 0 | 0 | 0 | 0 |
| Polynuclear aromatics | 0 | 0 | 2678 | 2678 | 0 | 2678 | 0 | 0 | 0 | 0 | 285 | 2678 | 285 | 2393 | 2393 | 2393 | 0 | 0 | 0 |
| Phenols | 0 | 0 | 2447 | 2447 | 0 | 2447 | 0 | 0 | 0 | 0 | 2447 | 2447 | 2447 | 0 | 0 | 0 | 0 | 0 | 0 |
| N-paraffin-HCK product A | 0 | 0 | 0 | 0 | 0 | 0 | 3492 | 21 | 21 | 0 | 3471 | 3471 | 3471 | 0 | 0 | 4 | 3498 | 3498 | 3498 |
| Cyclo C6-HCK products | 0 | 0 | 0 | 0 | 0 | 0 | 4320 | 4305 | 4305 | 0 | 14 | 14 | 14 | 0 | 0 | 39 | 4371 | 4371 | 4371 |
| N-paraffin-HCK product B | 0 | 0 | 0 | 0 | 0 | 0 | 1926 | 1859 | 1859 | 0 | 67 | 67 | 67 | 0 | 0 | 7 | 1935 | 1935 | 1935 |

| | | | | | | | | | | | | | | | | | | |
|--------------------------------------|-------|------|------|------|------|------|-------|------|------|-------|------|------|------|------|-------|-------|-------|-------|
| Stream No. | 515 | 521 | 522 | 523 | 524 | 526 | 528 | 532 | 536 | 600 | 769 | 770 | 773 | 774 | 791 | 792 | 809 | 810 |
| Temp F | 110 | 110 | 110 | 110 | 117 | 120 | 120 | 77 | 95 | 258 | 283 | 501 | 500 | 499 | 300 | 265 | 90 | 110 |
| Pres psia | 1255 | 1255 | 1255 | 1255 | 1295 | 50 | 51 | 283 | 1295 | 50 | 685 | 680 | 675 | 670 | 670 | 665 | 60 | 55 |
| Vapor mole frac. | 0.73 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0.00 | 1.00 | 1.00 | 1.00 | 0.00 | 1.00 | 1.00 | 0.01 | 0.00 | 0.00 | 0.00 | 0.00 |
| Total lb/h | 11166 | 581 | 10 | 571 | 571 | 25 | 10560 | 995 | 995 | 35889 | 9814 | 9814 | 5668 | 5668 | 29700 | 29700 | 14807 | 14807 |
| Flow rates in lb/h | | | | | | | | | | | | | | | | | | |
| Water | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 109 | 9814 | 9814 | 5668 | 5668 | 29700 | 29700 | 14807 | 14807 |
| Hydrogen | 541 | 531 | 9 | 522 | 522 | 9 | 0 | 995 | 995 | 2117 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Carbon monoxide | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 604 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Carbon dioxide | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 12122 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Methane | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 5773 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Ethane | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 4914 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Propane | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 2902 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| N-butane | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 2916 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| N-pentane | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 2654 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Ethene | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Propene | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 2 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Hydrogen sulfide | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 21 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Acids | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Extractives | 70 | 0 | 0 | 0 | 0 | 0 | 70 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Low MW lignin derived A | 252 | 0 | 0 | 0 | 0 | 0 | 252 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Low MW lignin derived B | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| High MW lignin derived A | 4 | 0 | 0 | 0 | 0 | 0 | 4 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| High MW lignin derived B | 1 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Nitrogen compounds | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Sulfur compounds | 224 | 0 | 0 | 0 | 0 | 0 | 224 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Acids intermediates | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Carbonyl intermediates | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Low MW lignin compound intermediates | 269 | 0 | 0 | 0 | 0 | 0 | 269 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Short chain n-paraffins | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1001 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Medium chain n-paraffins | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 2 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Iso-paraffin A | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 178 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Iso-paraffin B | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 19 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Cyclo C5 A | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 110 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Cyclo C5 B | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 82 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Cyclo C6 A | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 286 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Cyclo C6 B | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 7 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bicyclo | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Cyclo C7+ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 4 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Aromatic A | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 42 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Aromatic B | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 4 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Phenanthrenes | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Pyrenes | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Diphenyl compounds | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Indans | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 3 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Indenes | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 1,2,3,4-Naphthalenes | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Naphthalenes | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Polynuclear aromatics | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Phenols | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| N-paraffin-HCK product A | 3498 | 4 | 0 | 4 | 4 | 1 | 3492 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Cyclo C6-HCK products | 4371 | 40 | 1 | 39 | 39 | 12 | 4320 | 0 | 0 | 12 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| N-paraffin-HCK product B | 1935 | 7 | 0 | 7 | 7 | 2 | 1926 | 0 | 0 | 2 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

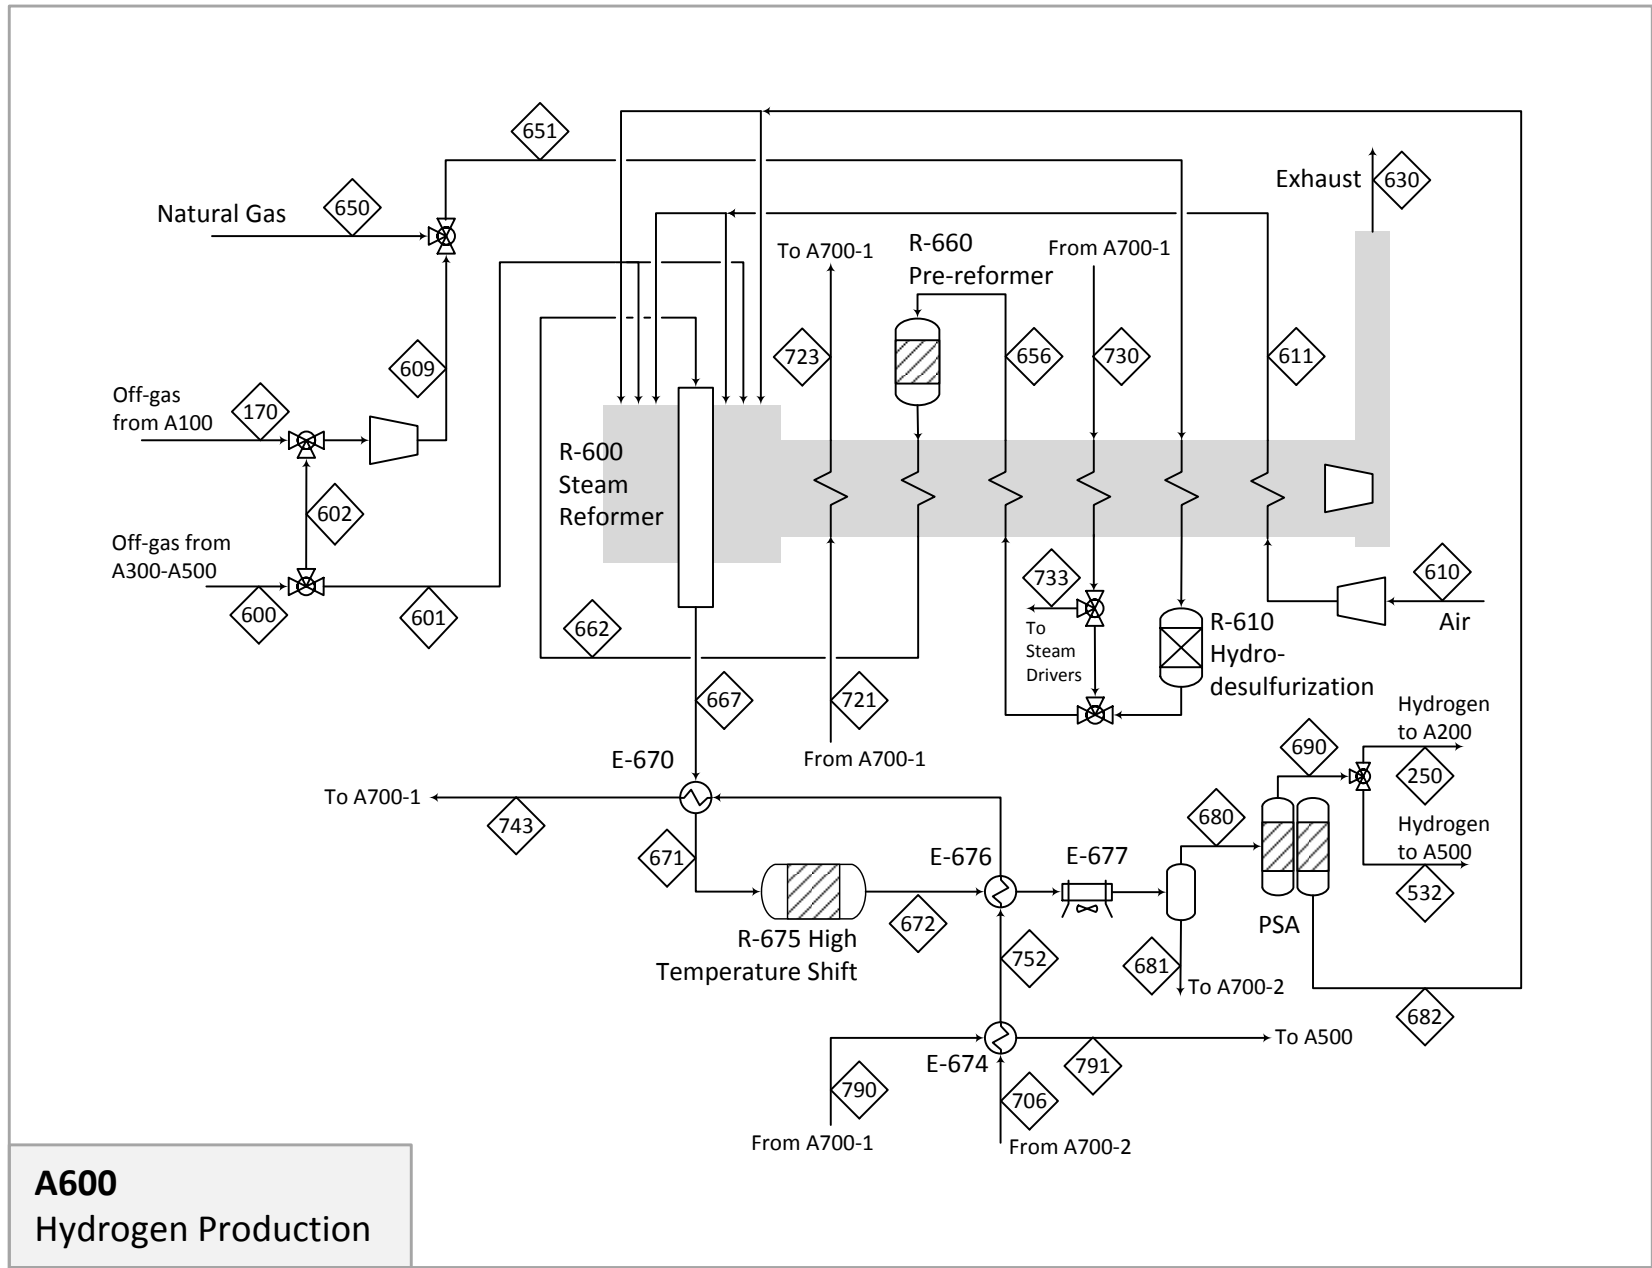


| | | | | | | | | | | | | | |
|--------------------------|-------|------|------|-------|------|-------|-------|--------|--------|--------|------|-------|--------|
| Stream No. | 170 | 250 | 532 | 600 | 601 | 602 | 609 | 610 | 611 | 630 | 650 | 651 | 656 |
| Temp F | 162 | 77 | 77 | 258 | 258 | 258 | 349 | 90 | 127 | 324 | 60 | 304 | 930 |
| Pres psia | 23 | 283 | 283 | 50 | 50 | 50 | 405 | 15 | 18 | 16 | 415 | 375 | 369 |
| Vapor mole frac. | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |
| Total lb/h | 12078 | 8846 | 995 | 35889 | 5635 | 30255 | 42333 | 248000 | 248000 | 344393 | 7000 | 49333 | 147015 |
| Flow rates in lb/h | | | | | | | | | | | | | |
| Water | 45 | 0 | 0 | 109 | 17 | 92 | 136 | 4854 | 4854 | 42118 | 0 | 136 | 97836 |
| Hydrogen | 4 | 8846 | 995 | 2117 | 332 | 1785 | 1789 | 0 | 0 | 0 | 0 | 1789 | 1789 |
| Oxygen | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 56268 | 56268 | 4452 | 0 | 0 | 0 |
| Nitrogen | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 183635 | 183635 | 183749 | 114 | 114 | 114 |
| Argon | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 3129 | 3129 | 3129 | 0 | 0 | 0 |
| Carbon monoxide | 5551 | 0 | 0 | 604 | 95 | 509 | 6061 | 0 | 0 | 0 | 0 | 6061 | 6061 |
| Carbon dioxide | 5231 | 0 | 0 | 12122 | 1903 | 10219 | 15450 | 114 | 114 | 110943 | 54 | 15504 | 15504 |
| Methane | 737 | 0 | 0 | 5773 | 906 | 4867 | 5604 | 0 | 0 | 0 | 6149 | 11753 | 11753 |
| Ethane | 101 | 0 | 0 | 4914 | 772 | 4143 | 4244 | 0 | 0 | 0 | 405 | 4649 | 4649 |
| Propane | 2 | 0 | 0 | 2902 | 456 | 2447 | 2449 | 0 | 0 | 0 | 180 | 2629 | 2629 |
| N-butane | 0 | 0 | 0 | 2916 | 458 | 2458 | 2458 | 0 | 0 | 0 | 47 | 2506 | 2506 |
| N-pentane | 0 | 0 | 0 | 2654 | 417 | 2237 | 2237 | 0 | 0 | 0 | 6 | 2243 | 2243 |
| I-butane | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 36 | 36 | 36 |
| I-pentane | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 6 | 6 | 6 |
| Ethene | 233 | 0 | 0 | 1 | 0 | 1 | 234 | 0 | 0 | 0 | 0 | 234 | 234 |
| Propene | 162 | 0 | 0 | 2 | 0 | 1 | 164 | 0 | 0 | 0 | 0 | 164 | 164 |
| Hydrogen sulfide | 0 | 0 | 0 | 21 | 3 | 17 | 17 | 0 | 0 | 3 | 0 | 17 | 0 |
| Acids | 2 | 0 | 0 | 0 | 0 | 0 | 2 | 0 | 0 | 0 | 0 | 2 | 2 |
| Ketones | 8 | 0 | 0 | 0 | 0 | 0 | 9 | 0 | 0 | 0 | 0 | 9 | 9 |
| Nitrogen compounds | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Short chain n-paraffins | 0 | 0 | 0 | 1001 | 157 | 844 | 844 | 0 | 0 | 0 | 4 | 847 | 847 |
| Medium chain n-paraffins | 0 | 0 | 0 | 2 | 0 | 2 | 2 | 0 | 0 | 0 | 0 | 2 | 2 |
| Iso-paraffin A | 0 | 0 | 0 | 178 | 28 | 150 | 150 | 0 | 0 | 0 | 0 | 150 | 150 |
| Iso-paraffin B | 0 | 0 | 0 | 19 | 3 | 16 | 16 | 0 | 0 | 0 | 0 | 16 | 16 |
| Cyclo C5 A | 0 | 0 | 0 | 110 | 17 | 93 | 93 | 0 | 0 | 0 | 0 | 93 | 93 |
| Cyclo C5 B | 0 | 0 | 0 | 82 | 13 | 69 | 69 | 0 | 0 | 0 | 0 | 69 | 69 |
| Cyclo C6 A | 0 | 0 | 0 | 286 | 45 | 241 | 241 | 0 | 0 | 0 | 0 | 241 | 241 |
| Cyclo C6 B | 0 | 0 | 0 | 7 | 1 | 6 | 6 | 0 | 0 | 0 | 0 | 6 | 6 |
| Bicyclos | 0 | 0 | 0 | 1 | 0 | 1 | 1 | 0 | 0 | 0 | 0 | 1 | 1 |
| Cyclo C7+ | 0 | 0 | 0 | 4 | 1 | 3 | 3 | 0 | 0 | 0 | 0 | 3 | 3 |
| Aromatic A | 0 | 0 | 0 | 42 | 7 | 35 | 35 | 0 | 0 | 0 | 0 | 35 | 35 |
| Aromatic B | 0 | 0 | 0 | 4 | 1 | 3 | 3 | 0 | 0 | 0 | 0 | 3 | 3 |
| Indans | 0 | 0 | 0 | 3 | 1 | 3 | 3 | 0 | 0 | 0 | 0 | 3 | 3 |
| Indenes | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Naphthalenes | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| N-paraffin-HCK product A | 0 | 0 | 0 | 1 | 0 | 1 | 1 | 0 | 0 | 0 | 0 | 1 | 1 |
| Cyclo C6-HCK products | 0 | 0 | 0 | 12 | 2 | 10 | 10 | 0 | 0 | 0 | 0 | 10 | 10 |
| N-paraffin-HCK product B | 0 | 0 | 0 | 2 | 0 | 2 | 2 | 0 | 0 | 0 | 0 | 2 | 2 |

| | | | | | | | | | | | | | | | | | |
|--------------------------|--------|--------|--------|--------|--------|-------|-------|------|--------|--------|--------|--------|--------|--------|--------|-------|-------|
| Stream No. | 662 | 667 | 671 | 672 | 680 | 681 | 682 | 690 | 706 | 721 | 723 | 730 | 733 | 743 | 752 | 790 | 791 |
| Temp F | 1110 | 1562 | 500 | 676 | 150 | 150 | 111 | 77 | 283 | 499 | 499 | 499 | 750 | 499 | 411 | 499 | 300 |
| Pres psia | 344 | 314 | 311 | 301 | 293 | 293 | 50 | 283 | 685 | 675 | 675 | 675 | 670 | 675 | 680 | 675 | 670 |
| Vapor mole frac. | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0.00 | 0.99 | 1.00 | 0.00 | 0.00 | 0.50 | 1.00 | 1.00 | 0.69 | 0.00 | 1.00 | 0 |
| Total lb/h | 147016 | 147015 | 147015 | 147016 | 100601 | 46415 | 90760 | 9841 | 203000 | 144380 | 144380 | 225650 | 127950 | 203000 | 203000 | 29700 | 29700 |
| Flow rates in lb/h | | | | | | | | | | | | | | | | | |
| Water | 88456 | 65280 | 65280 | 48271 | 1856 | 46415 | 1856 | 0 | 203000 | 144380 | 144380 | 225650 | 127950 | 203000 | 203000 | 29700 | 29700 |
| Hydrogen | 2227 | 9675 | 9675 | 11578 | 11578 | 0 | 1737 | 9841 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Oxygen | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Nitrogen | 114 | 114 | 114 | 114 | 114 | 0 | 114 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Argon | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Carbon monoxide | 1245 | 32665 | 32665 | 6220 | 6220 | 0 | 6220 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Carbon dioxide | 30752 | 34377 | 34377 | 75928 | 75928 | 0 | 75928 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Methane | 24221 | 4905 | 4905 | 4905 | 4905 | 0 | 4905 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Ethane | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Propane | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| N-butane | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| N-pentane | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| I-butane | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| I-pentane | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Ethene | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Propene | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Hydrogen sulfide | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Acids | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Ketones | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Nitrogen compounds | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Short chain n-paraffins | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Medium chain n-paraffins | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Iso-paraffin A | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Iso-paraffin B | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Cyclo C5 A | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Cyclo C5 B | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Cyclo C6 A | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Cyclo C6 B | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bicyclos | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Cyclo C7+ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Aromatic A | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Aromatic B | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Indans | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Indenes | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Naphthalenes | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| N-paraffin-HCK product A | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Cyclo C6-HCK products | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| N-paraffin-HCK product B | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

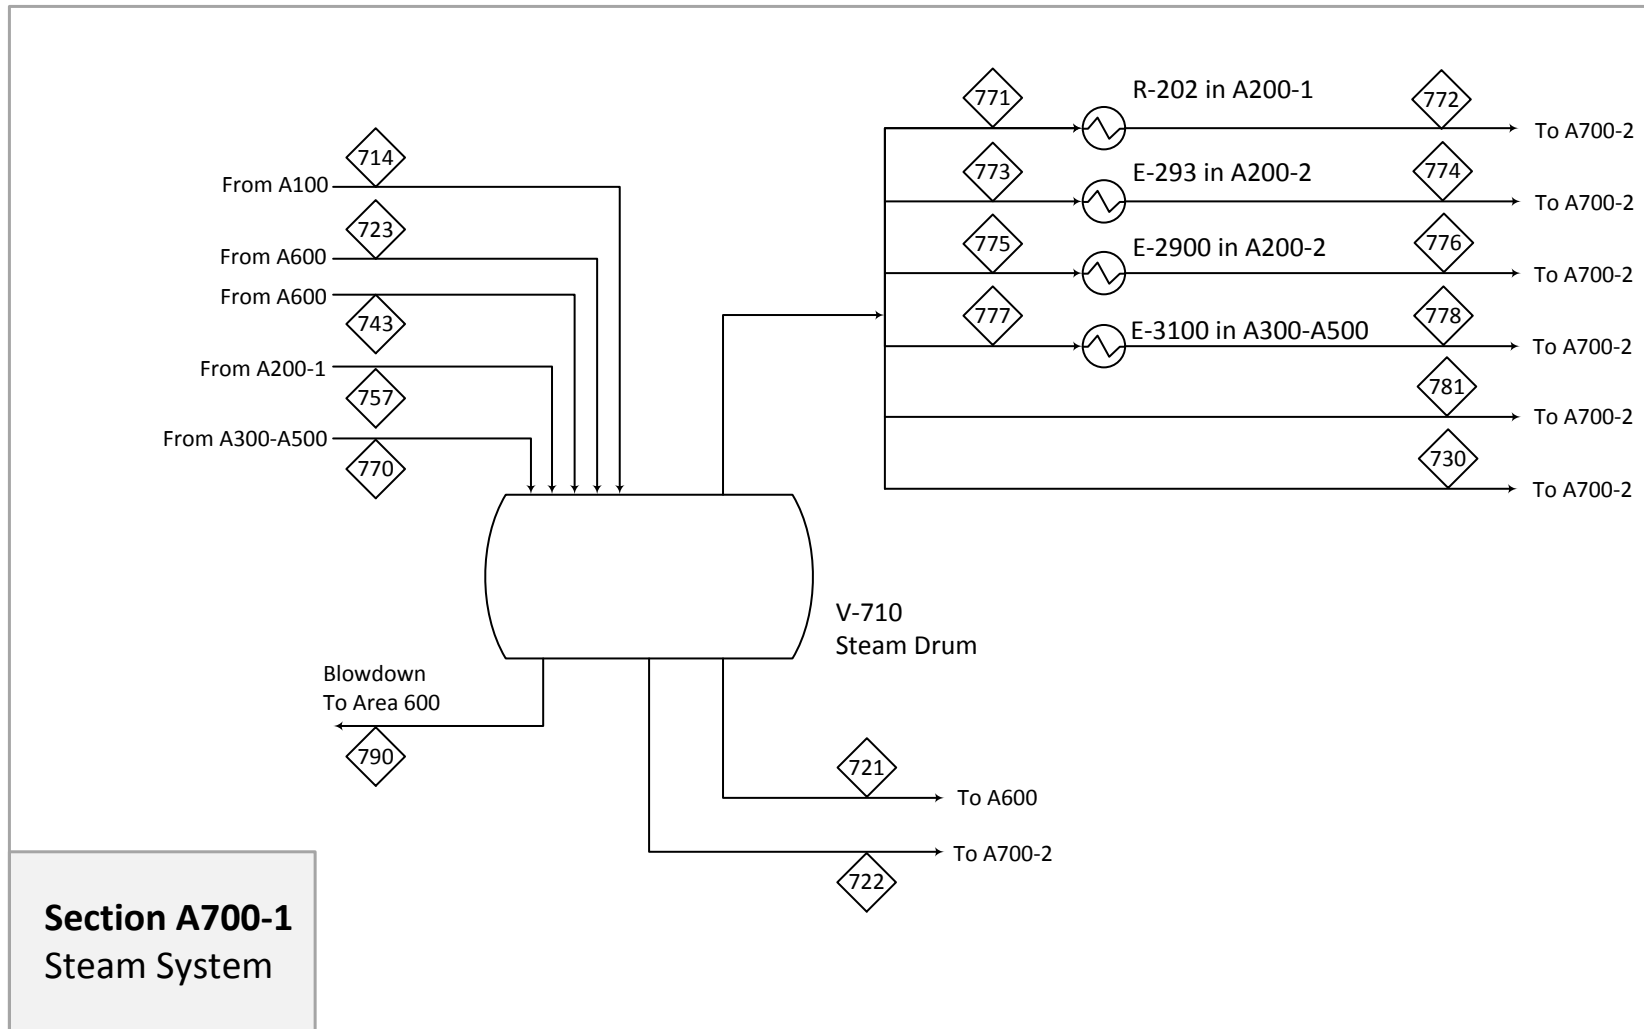

| Stream No. | 714 | 721 | 722 | 723 | 730 | 743 | 757 | 770 | 771 | 772 | 773 | 774 | 775 | 776 | 777 | 778 | 781 | 790 |
|--------------------|-------|--------|------|--------|--------|--------|-------|------|-------|-------|------|------|------|------|-------|-------|------|-------|
| Temp F | 501 | 499 | 499 | 499 | 499 | 499 | 499 | 501 | 499 | 489 | 499 | 498 | 499 | 494 | 499 | 498 | 499 | 499 |
| Pres psia | 675 | 675 | 675 | 675 | 675 | 675 | 675 | 680 | 675 | 670 | 675 | 670 | 675 | 675 | 675 | 670 | 675 | 675 |
| Vapor mole frac. | 1.00 | 0.00 | 0.00 | 0.50 | 1.00 | 0.69 | 0.36 | 1.00 | 1.00 | 0.00 | 1.00 | 0.01 | 1.00 | 0.00 | 1.00 | 0.00 | 1.00 | 0.00 |
| Total lb/h | 36600 | 144380 | 8619 | 144380 | 225650 | 203000 | 75000 | 9821 | 28000 | 28000 | 5669 | 5669 | 4316 | 4316 | 13206 | 13206 | 9261 | 29700 |
| Flow rates in lb/h | | | | | | | | | | | | | | | | | | |
| Water | 36600 | 144380 | 8619 | 144380 | 225650 | 203000 | 75000 | 9821 | 28000 | 28000 | 5669 | 5669 | 4316 | 4316 | 13206 | 13206 | 9261 | 29700 |

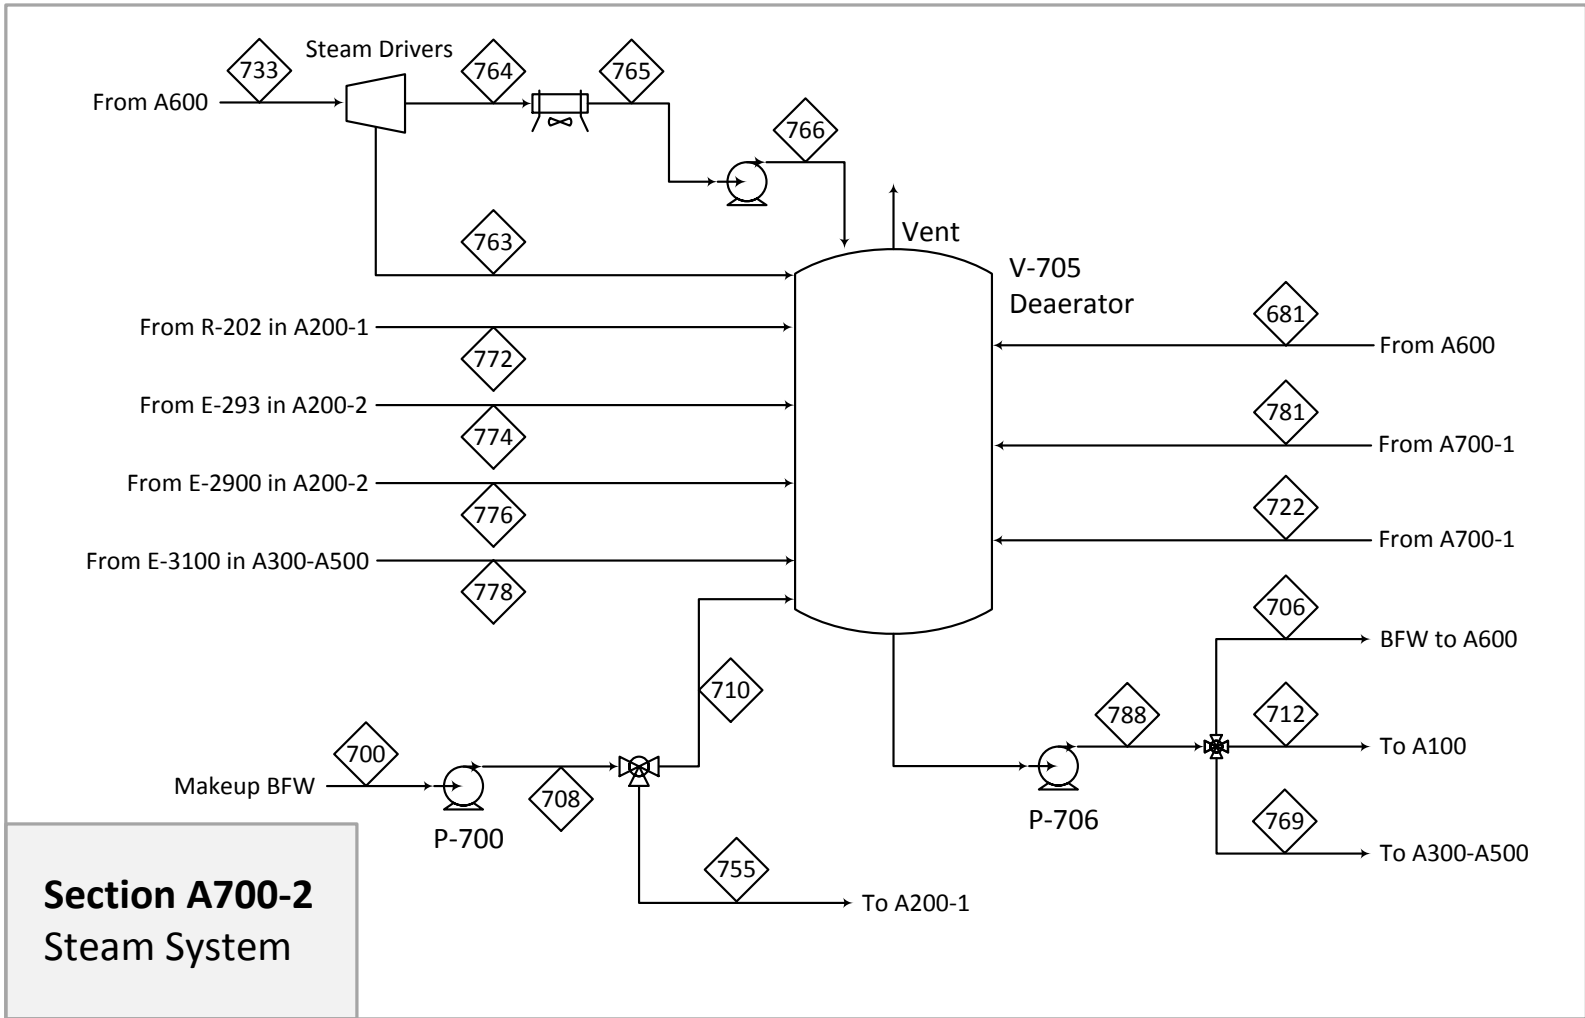

| Stream No. | 681 | 700 | 706 | 708 | 710 | 712 | 722 | 733 | 755 | 763 | 764 | 765 | 766 | 769 | 772 | 774 | 776 | 778 | 781 | 788 |
|--------------------|-------|-------|--------|-------|------|-------|------|--------|-------|------|--------|--------|--------|------|-------|------|------|-------|------|--------|
| Temp F | 150 | 60 | 283 | 63 | 63 | 283 | 499 | 750 | 63 | 482 | 219 | 150 | 150 | 283 | 489 | 498 | 494 | 498 | 499 | 283 |
| Pres psia | 293 | 25 | 685 | 685 | 685 | 685 | 675 | 670 | 685 | 155 | 17 | 17 | 70 | 685 | 670 | 670 | 675 | 670 | 675 | 685 |
| Vapor mole frac. | 0 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 1 | 0.00 | 1.00 | 0.98 | 0 | 0.00 | 0.00 | 0.00 | 0.01 | 0.00 | 0.00 | 1.00 | 0.00 |
| Total lb/h | 46415 | 80985 | 203000 | 80985 | 5985 | 36600 | 8619 | 127950 | 75000 | 1279 | 126671 | 126671 | 126671 | 9821 | 28000 | 5669 | 4316 | 13206 | 9261 | 249421 |
| Flow rates in lb/h | | | | | | | | | | | | | | | | | | | | |
| Water | 46415 | 80985 | 203000 | 80985 | 5985 | 36600 | 8619 | 127950 | 75000 | 1279 | 126671 | 126671 | 126671 | 9821 | 28000 | 5669 | 4316 | 13206 | 9261 | 249421 |

| Equipment Number | Number Required | Equipment Name | Scaling Stream | Original Equipment Stream Flow | New Stream Flow | stream flow units | Size Ratio | Original Equip Cost (per unit) | Base Year | COST BASIS: installed (i) or bare (b) | Total Original Equip Cost (Req'd & Spare) in Base Year | Scaling Exponent | Scaled Cost in Base Year | Installation Factor | Installed Cost in Base Year | Installed Cost in 2011\$ | Scaled Uninstalled Cost in 2011\$ | source | |
|--|-----------------|-----------------------------|--------------------|--------------------------------|-----------------|-------------------|------------|--------------------------------|-----------|---------------------------------------|--|------------------|--------------------------|---------------------|-----------------------------|--------------------------|-----------------------------------|------------|--|
| A 300 & 500 Product Separation and Hydrocracking | | | | | | | | | | | | | | | | | | | |
| T310 | 1 | T-310 Naphtha Splitter | S305 | 50,335 | 49,674 | lb/h | 0.99 | \$321,200 | 1Q 2011 | b | \$321,200 | 0.65 | 318,455 | 1.74 | 553,727 | 567,287 | \$326,253 | 2 | |
| T320 | 1 | T-320 Product Splitter | S323 | 38,000 | 38,001 | lb/h | 1.00 | \$484,600 | 1Q 2011 | b | \$484,600 | 0.65 | 484,607 | 1.67 | 809,612 | 829,438 | \$496,474 | 2 | |
| E3100 | 1 | T-310 Reboiler | DUTY | 9.65 | 9.40 | mmbtuh | 0.97 | \$58,700 | 1Q 2011 | b | \$58,700 | 0.65 | 57,707 | 2.47 | 142,547 | 146,038 | \$59,120 | 2 | |
| E3200 | 1 | T-320 Fired Reboiler | DUTY | 14.60 | 14.00 | mmbtuh | 1.00 | \$425,300 | 1Q 2011 | b | \$425,300 | 0.65 | 413,856 | 1.29 | 533,874 | 546,948 | \$423,991 | 2 | |
| E3101 | 1 | T-310 Air Cool Condenser | DUTY | 10.24 | 10.24 | mmbtuh | 1.00 | \$255,600 | 1Q 2011 | b | \$255,600 | 0.65 | 255,600 | 1.46 | 373,176 | 382,314 | \$261,859 | 2 | |
| E3201 | 1 | T-320 Air Cool Condenser | DUTY | 13.89 | 13.52 | mmbtuh | 1.00 | \$207,100 | 1Q 2011 | b | \$207,100 | 0.65 | 203,497 | 1.39 | 282,861 | 289,788 | \$208,481 | 2 | |
| V310 | 1 | T-310 Reflux Drum | wksht | 83 | 83 | gpm | 1.00 | \$28,900 | 1Q 2011 | b | \$28,900 | 0.65 | 28,880 | 4.96 | 143,299 | 146,808 | \$29,587 | 2 | |
| V320 | 1 | T-320 Reflux Drum | wksht | 15 | 16 | gpm | 1.07 | \$14,700 | 1Q 2011 | b | \$14,700 | 0.65 | 15,367 | 6.72 | 103,284 | 105,813 | \$15,743 | 2 | |
| P332 | 2 | T-310 bottom product pump | S323 | 16 | 16 | gpm | 1.00 | \$5,600 | 1Q 2011 | b | \$11,200 | 0.65 | 11,195 | 2.69 | 30,152 | 30,890 | \$11,470 | 2 | |
| P333 | 2 | T-310 bottom product pump | S323 | 16 | 16 | gpm | 1.00 | \$5,700 | 1Q 2011 | b | \$11,400 | 0.65 | 11,395 | 4.56 | 51,969 | 53,242 | \$11,674 | 2 | |
| | 1 | Hydrocracker Unit : | S337 | 2,250 | 551 | bpd fd | 0.24 | \$30,000,000 | 1Q 2005 | i | \$30,000,000 | 0.65 | 12,018,172 | 3.00 | 12,018,172 | 15,063,222 | \$5,021,074 | 4 | |
| H508 | | H508 Fired heater | | | | | | | | | | | | | | | | | |
| R510 | | R510 Hydrocracker Vessel | | | | | | | | | | | | | | | | | |
| E513 | | E513 Feed/product exchanger | | | | | | | | | | | | | | | | | |
| E516 | | E516 air cooler | | | | | | | | | | | | | | | | | |
| E517 | | E517 trim cooler | | | | | | | | | | | | | | | | | |
| V520 | | V520 HP flash | | | | | | | | | | | | | | | | | |
| V530 | | V530 LP flash | | | | | | | | | | | | | | | | | |
| C522 | | Fuel Gas Compressor | | | | | | | | | | | | | | | | | |
| E315 | 1 | Gasoline Product Cooler | Duty - placeholder | 1.0 | 1.00 | mmbtuh | 1.00 | \$66,800 | 1Q 2011 | b | \$66,800 | 0.65 | 66,800 | 1.30 | 86,997 | 89,127 | \$68,436 | 2 | |
| E325 | 1 | Diesel Product Cooler | Duty | 3.1 | 2.98 | mmbtuh | 0.96 | \$185,800 | 1Q 2011 | b | \$185,800 | 0.65 | 181,093 | 1.37 | 248,637 | 254,726 | \$185,527 | 2 | |
| | | | | | | | | | | Subtotal | A 300 & 500 Product Separation and Hydrocracking | | | | | \$18,505,641 | \$7,119,689 | | |
| A600 Hydrogen Plant | | | | | | | | | | | | | | | | | | | |
| | 1 | Steam Reformer System | S250+S501 | 49.0 | 44.5 | mnsfd H2 | 0.91 | \$66,875,000 | May 2007 | i | \$66,875,000 | 0.65 | 62,781,396 | 1.92 | 62,781,396 | \$69,144,535 | \$36,012,778.46 | 5 | |
| | | | | | | | | | | Subtotal | Hydrogen Plant | | | | | 62,781,396 | 69,144,535 | 36,012,778 | |

| Equipment Number | Number Required | Equipment Name | Scaling Stream | Original Equipment Stream Flow | New Stream Flow | stream flow units | Size Ratio | Original Equip Cost (per unit) | Base Year | COST BASIS: installed (i) or bare (b) | Total Original Equip Cost (Req'd & Spare) in Base Year | Scaling Exponent | Scaled Cost in Base Year | Installation Factor | Installed Cost in Base Year | Installed Cost in 2011\$ | Scaled Uninstalled Cost in 2011\$ | source |
|------------------|-------------------|---------------------------------|----------------|----------------------------------|-----------------|-------------------|------------|--------------------------------|-----------|---------------------------------------|--|------------------|---------------------------|---------------------|-----------------------------|--------------------------|-----------------------------------|--------|
| A700 | Utilities and WWT | | | | | | | | | | | | | | | | | |
| | 1 | WWT aerobic digestion | mptd biomass | 1,000 | 2,000 | tpd | 2.00 | \$1,554,000 | 2004 | i | \$1,554,000 | 0.65 | 2,438,487 | 3.00 | 2,438,487 | 3,215,268 | \$1,071,756 | 6 |
| | 1 | Field Erected CTW w pumps, etc | from FLOWS | 4,620 | 4,902 | gpm | 1.06 | \$237,700 | 1Q 2011 | i | \$237,700 | 0.78 | 248,948 | 1.57 | 248,948 | 255,045 | \$162,449 | 2 |
| | 1 | Plant Air Compressor | mptd biomass | 2,000 | 2,000 | tpd | 1.00 | \$32,376 | 2002 | b | \$32,376 | 0.34 | 32,376 | 3.00 | 97,129 | 143,803 | \$47,934 | 7 |
| | 1 | Hydraulic Truck Dump with Scale | mptd biomass | 2,000 | 2,000 | tpd | 1.00 | \$80,000 | 1998 | b | \$80,000 | 0.6 | 80,000 | 3.00 | 240,000 | 360,893 | \$120,298 | 7 |
| | 1 | Firewater Pump | mptd biomass | 2,000 | 2,000 | tpd | 1.00 | \$18,400 | 1997 | b | \$18,400 | 0.79 | 18,400 | 3.00 | 55,200 | 83,650 | \$27,883 | 7 |
| | 1 | Diesel Pump | mptd biomass | 2,000 | 2,000 | tpd | 1.00 | \$6,100 | 1997 | b | \$6,100 | 0.79 | 6,100 | 3.00 | 18,300 | 27,732 | \$9,244 | 7 |
| | 1 | Instrument Air Dryer | mptd biomass | 2,000 | 2,000 | tpd | 1.00 | \$8,349 | 2002 | b | \$8,349 | 0.6 | 8,349 | 3.00 | 25,047 | 37,083 | \$12,361 | 7 |
| | 1 | Plant Air Receiver | mptd biomass | 2,000 | 2,000 | tpd | 1.00 | \$7,003 | 2002 | b | \$7,003 | 0.72 | 7,003 | 3.00 | 21,009 | 31,105 | \$10,368 | 7 |
| | 1 | Firewater Storage Tank | mptd biomass | 2,000 | 2,000 | tpd | 1.00 | \$166,100 | 1997 | b | \$166,100 | 0.51 | 166,100 | 3.00 | 498,300 | 755,121 | \$251,707 | 7 |
| | 1 | Ammonia Pump | | included in Stream Reformer Cost | | | | | | | | | | | | | | |
| | 1 | Hydrazine Pump | | included in Stream Reformer Cost | | | | | | | | | | | | | | |
| | 1 | Ammonia Storage Tank | | included in Stream Reformer Cost | | | | | | | | | | | | | | |
| | 1 | Hydrazine Storage Tank | | included in Stream Reformer Cost | | | | | | | | | | | | | | |
| | 1 | Flare | | included in Stream Reformer Cost | | | | | | | | | | | | | | |
| | 1 | Sulfur Agent Storage Tank | S260 | 242 | 167 | gpd | 0.69 | \$84,800 | 1Q 2011 | b | \$84,800 | 0.65 | \$66,523 | 2.48 | \$164,995 | \$169,036 | \$68,152 | 2 |
| | 1 | Feed Storage | | 1,056,846 | 1,056,846 | gallons | 1.00 | 470,000 | 1Q 2005 | b | \$470,000 | 0.65 | 470,000 | 3.00 | 1,410,000 | 1,767,252 | \$589,084 | 3 |
| | 1 | Product Storage | | 558,000 | 577,518 | gallons | 1.03 | 320,384 | 1Q 2005 | b | \$320,384 | 0.65 | 327,625 | 3.00 | 982,874 | 1,231,905 | \$410,635 | 3 |
| | 1 | Product Storage | | 558,000 | 528,283 | gallons | 0.95 | 320,384 | 1Q 2005 | b | \$320,384 | 0.65 | 309,188 | 3.00 | 927,563 | 1,162,581 | \$387,527 | 3 |
| | | | | | | | | | Subtotal | A700 | | | Utilities and Auxiliaries | | | \$9,240,474 | \$3,169,398 | |
| | | | | | | | | | | | | | | | | \$386,562,550 | \$157,878,738 | |
| | | | | | | | | | | | | | | | | | | TOTALS |

Equipment Sources:

1. Envergent 2009.
2. ASPEN 7.3.2 Capital Cost Evaluator
3. Aspen Icarus 2006
4. Marker 2005.
5. SRI 2007.
6. Jones 2009.
7. Phillips 2007.
9. Budgetary Vendor Estimate
10. Budgetary Vendor Estimate

| Tag | Equipment Descriptions | Type | Design Temperature and pressure | Size | | Metallurgy | Cost Basis |
|---------|--|--|--|---|---------------|---|-------------------------------------|
| M-110 | Filtrate screw feeder | | | Wet feed flow, lb/h | 5353 | SS316 | Aspen Capital Cost Estimator V7.3.2 |
| E-181 | Steam generator - Char burner exhaust | Floating head heat exchanger | Shell: 1098 F, 31 psig Tube: 550 F, 726 psig | Area, ft2 Duty, MMBtu/h | 476 26.2 | CS | Aspen Capital Cost Estimator V7.3.2 |
| E-180 | BFW Heater - Char burner exhaust | Pre-engineered U-tube heat exchanger | Shell: 1162 F, 31 psig Tube: 801 F, 737 psig | Area, ft2 Duty, MMBtu/h | 103 8.7 | SS316 | Aspen Capital Cost Estimator V7.3.2 |
| C-101 | Air compressor for biomass drying | Reciprocating motor drive | 140 F, 5 psig | Actual Inlet flowrate, ft3/min | 44381 | CS | Aspen Capital Cost Estimator V7.3.2 |
| S-155 | Bio-oil cold filters | Filter | | | | | Pall |
| R205 | Stabilizer | | Reaction channel: 335 F, 1509 psig Steam side: 550F, 711 psig | Diameter, ft Length, ft | 15 60 | Reaction side: SS316 cladding Steam side: CS | Aspen Capital Cost Estimator V7.3.2 |
| R205 | 1st stg Reactor | | 396 F, 2050 psig | Diameter, ft Length, ft | 10 52 | SS316 cladding | Budgetary estimate from Pall |
| R215 | 2nd stg Reactors | | 820 F, 2211 psig | Diameter, ft Length, ft | 10 49 | SS316 cladding | Budgetary estimate from Pall |
| V203 | Stabilizer Product Flash | Vertical 1 minute holdup | 155 F, 1507 psig | Diameter, ft Length, ft | 2.5 10.5 | SS316 cladding | Aspen Capital Cost Estimator V7.3.2 |
| V230 | 2nd stg Three Phase Separator | Horizontal 5 minute holdup | 200 F, 2162 psig | Diameter, ft Length, ft | 10 49 | SS316 cladding | Aspen Capital Cost Estimator V7.3.2 |
| V232 | Hydrotreating Oil Flash | Vertical, cylinder 1 minute holdup | 89 F, 809 psig | Diameter, ft Length, ft | 7.5 36 | SS316 cladding | Aspen Capital Cost Estimator V7.3.2 |
| C231 | Expander | | Inlet: 200 F, 2162 psig Outlet: 809 psig | Actual Inlet flowrate, ft3/min | 700 | | Aspen Capital Cost Estimator V7.3.2 |
| E205 | Stabilization Bed Product Cooler | Fixed shell and tube heat exchanger | Shell: 160 F, 70 psig Tube: 334 F, 1513 psig | Area, ft2 Duty, MMBtu/h | 3860 25.4 | SS316 cladding on tube side | Aspen Capital Cost Estimator V7.3.2 |
| E215 | 1st Feed/Product Heat Exchanger | Fixed shell and tube heat exchanger | Shell: 453 F, 2168 psig Tube: 350 F, 2255 psig | Area, ft2 Duty, MMBtu/h | 2069 28 | SS316 cladding | Aspen Capital Cost Estimator V7.3.2 |
| E221 | 2nd Feed/Product Heat Exchanger | Fixed shell and tube heat exchanger | Shell: 650 F, 2173 psig Tube: 600 F, 2217 psig | Area, ft2 Duty, MMBtu/h | 11560 52.2 | SS316 cladding | Aspen Capital Cost Estimator V7.3.2 |
| E228 | Hydrotreated Oil Product Heat Recovery | Fixed shell and tube heat exchanger | Shell: 550 F, 732 psig Tube: 882 F, 2173 psig | Area, ft2 Duty, MMBtu/h | 1275 32.2 | SS316 cladding on tube side | Aspen Capital Cost Estimator V7.3.2 |
| E229 | Hydrotreated Oil Product Cooler | Fixed shell and tube heat exchanger | Shell: 403 F, 738 psig Tube: 405 F, 2178 psig | Area, ft2 Duty, MMBtu/h | 5468 17.9 | SS316 cladding | Aspen Capital Cost Estimator V7.3.2 |
| E294 | PSA Feed Heater | Fixed shell and tube heat exchanger | Shell: 136 F, 809 psig Tube: 407 F, 2167 psig | Area, ft2 Duty, MMBtu/h | 114 3.1 | SS316 cladding | Aspen Capital Cost Estimator V7.3.2 |
| H222 | Fired Heater - startup | | 600 F, 2211 psig | Std gas flow rate, ft3/min Duty, MMBtu/h | 81.62 8.62 | CS | Aspen Capital Cost Estimator V7.3.2 |
| E227 | Hydrotreated Oil Air Cooler | Air fin | 300 F, 150 psig | Area, ft2 Duty, MMBtu/h | 6059 40.3 | SS316 tube | Aspen Capital Cost Estimator V7.3.2 |
| E293 | Light Column Feed Heater | Fixed shell and tube heat exchanger | Shell: 550 F, 726 psig Tube: 350 F, 809 psig | Area, ft2 Duty, MMBtu/h | 168 4 | SS316 cladding on tube side | Aspen Capital Cost Estimator V7.3.2 |
| E2900 | T290 Reboiler | U-tube reboiler | Shell: 550 F, 726 psig Tube: 377 F, 57 psig | Area, ft2 Duty, MMBtu/h | 190 2.8 | SS316 cladding on shell side | Aspen Capital Cost Estimator V7.3.2 |
| E2901 | T290 Condenser | Fixed shell and tube heat exchanger | Shell: 196 F, 55 psig Tube: 160 F, 50 psig | Area, ft2 Duty, MMBtu/h | 417 1.8 | SS316 cladding on shell side | Aspen Capital Cost Estimator V7.3.2 |
| T290 | Light Column | | 377 F, 77 psig | Diameter, ft # of trays | 2.5 40 | SS316 cladding | Aspen Capital Cost Estimator V7.3.2 |
| V290 | T290 Reflux Drum | Horizontal 5 minute holdup | 377 F, 57 psig | Diameter, ft Length, ft | 4 12 | SS316 cladding | Aspen Capital Cost Estimator V7.3.2 |
| C251 | PSA Off Gas compressor | Reciprocating motor drive | Inlet: 145 F, 5 psig Outlet: 60 psig | Actual Inlet flowrate, ft3/min | 10379 | CS | Aspen Capital Cost Estimator V7.3.2 |
| C208a,b | Stabilizer gas product compressor | Reciprocating motor drive | Inlet: 145 F, 5 psig Outlet: 2255 psig | Actual Inlet flowrate, ft3/min | 1184 | CS | Aspen Capital Cost Estimator V7.3.2 |


| Tag | Equipment Descriptions | Type | Design Temperature and pressure | Size | | Metallurgy | Cost Basis |
|-------|----------------------------|-------------------------------|--|---|------|----------------|-------------------------------------|
| C252 | Makeup Hydrogen Compressor | Reciprocating motor drive | Inlet: 145 F, 5 psig Outlet: 792 psig | Actual Inlet flowrate, ft ³ /min | 1458 | CS | Aspen Capital Cost Estimator V7.3.2 |
| C254 | Hydrogen Compressor | Reciprocating motor drive | Inlet: 145 F, 5 psig Outlet: 1304 psig | Actual Inlet flowrate, ft ³ /min | 1180 | CS | Aspen Capital Cost Estimator V7.3.2 |
| T310 | T-310 Naphtha Splitter | | 448 F, 35 psig | Diameter, ft | 5 | SS316 cladding | Aspen Capital Cost Estimator V7.3.2 |
| | | | | # of trays | 30 | | |
| T320 | T-320 Product Splitter | | 731 F, 26 psig | Diameter, ft | 7 | SS316 cladding | Aspen Capital Cost Estimator V7.3.2 |
| | | | | # of trays | 30 | | |
| E3100 | T-310 Reboiler | U-tube reboiler | Shell: 448 F, 35 psig Tube: 550 F, 726 psig | Area, ft ² | 1030 | | Aspen Capital Cost Estimator V7.3.2 |
| | | | | Duty, MMBtu/h | 9.6 | | |
| E3200 | T-320 Fired Reboiler | | 730 F, 45 psig | Std gas flow rate, ft ³ /min | 445 | CS | Aspen Capital Cost Estimator V7.3.2 |
| | | | | Duty, MMBtu/h | 14.6 | | |
| E3101 | T-310 Air Cool Condenser | Air fin | 300 F, 45 psig | Area, ft ² | 4850 | SS316 tube | Aspen Capital Cost Estimator V7.3.2 |
| | | | | Duty, MMBtu/h | 10.3 | | |
| E3201 | T-320 Air Cool Condenser | Air fin | 300 F, 35 psig | Area, ft ² | 3849 | SS316 tube | Aspen Capital Cost Estimator V7.3.2 |
| | | | | Duty, MMBtu/h | 14.2 | | |
| V310 | T-310 Reflux Drum | Horizontal 5 minute holdup | 448 F, 35 psig | Diameter, ft | 4 | SS316 cladding | Aspen Capital Cost Estimator V7.3.2 |
| | | | | Length, ft | 10.5 | | |
| V320 | T-320 Reflux Drum | Horizontal 5 minute holdup | 730 F, 25 psig | Diameter, ft | 2 | SS316 cladding | Aspen Capital Cost Estimator V7.3.2 |
| | | | | Length, ft | 6.5 | | |
| E315 | Gasoline Product Cooler | Air fin | 300 F, 150 psig | Area, ft ² | 985 | CS | Aspen Capital Cost Estimator V7.3.2 |
| | | | | Duty, MMBtu/h | 1 | | |
| E325 | Diesel Product Cooler | Air fin | 300 F, 150 psig | Area, ft ² | 5137 | CS | Aspen Capital Cost Estimator V7.3.2 |
| | | | | Duty, MMBtu/h | 3 | | |

Appendix C: Base Case Process Parameters and Operation

| | | | | | |
|-----------------------------------|------|--|-------|--|-------|
| Feed Dryer | | Fast Pyrolysis Oil Quench Columns | | Stabilizer* | |
| Inlet biomass | | Organic liquid recovery (%) | 99.6 | Temperature (°F) | 284 |
| Temperature (°F) | 68 | Cold stream temperature (°F) | | Pressure (psia) | 1200 |
| Moisture content (%wt) | 30 | 1st Quench column | 140 | Hydrogen Consumption* (%wt, per pyrolysis oil) | 0.08 |
| Inlet Flue gas | | 2nd Quench column | 110 | H2 feed/dry oil feed (wt/wt) | 0.055 |
| Temperature (°F) | 584 | Product stream temperature (°F) | | LHSV (h ⁻¹) | 0.5 |
| Oxygen content (% mole) | 9.6 | 1st Quench column | 158 | Reactor volume (gallon) | 76700 |
| Outlet biomass | | 2nd Quench column | 113 | Number of tubes | 800 |
| Temperature (°F) | 160 | | | Reactor length (ft) | 60 |
| Moisture content (%wt) | 10 | | | Number of trains | 1 |
| Outlet Flue gas | | Fast Pyrolysis Oil Cold Filter | | Inlet | |
| Dew point (°F) | 139 | Solid removal (%) | 100 | Temperature (°F) | 132 |
| Temperature (°F) | 161 | Fast pyrolysis oil yield loss | | | |
| Moisture content (%wt) | 12 | % of fast pyrolysis oil to the filter | 3.055 | Conversion (wt%) | |
| | | % of dry biomass | 2 | Acids | 19.9 |
| Pyrolyzer | | Char Combustor | | Ketones | 19.8 |
| Biomass moisture content (%wt) | 10 | Temperature (°F) | 1128 | Extractives | 5 |
| Biomass particle size (mm) | 2-6 | Pressure (psia) | 21 | Low MW lignin derived A | 8 |
| Fluidized gas (wt/wt dry biomass) | 14.5 | Air (actual/minimum for combustor) | 1.20 | | |
| Sand (wt/wt dry biomass) | 3 | Heat Losses (% of biomass LHV) | 1 | Conversion (wt%) to: | |
| Inlet temperature (°F) | 931 | | | Acids intermediates | 29.5 |
| Pressure (psia) | 21 | | | Carbonyl intermediates | 42.9 |
| Heat Losses (% of biomass LHV) | 1 | | | Extractive intermediates | 3.4 |
| Dry bio-oil yield (% dry biomass) | 64 | | | Low MW lignin compound intermediates | 20.5 |
| Water yield (% dry biomass) | 12 | | | Methane | 3.1 |
| Char yield (% dry biomass) | 12 | | | Carbon dioxide | 0.6 |
| Gas yield (% dry biomass) | 12 | | | | |
| | | | | Yield (include hydrogen, wt %) | |
| | | | | Oil | 96 |
| | | | | Gas | 4 |

Complete experimental data for hydrotreating and hydrocracking are not currently available. Reaction conversions, hydrotreating intermediate yields and hydrocracking yields are assumed for completing mass and energy balances.

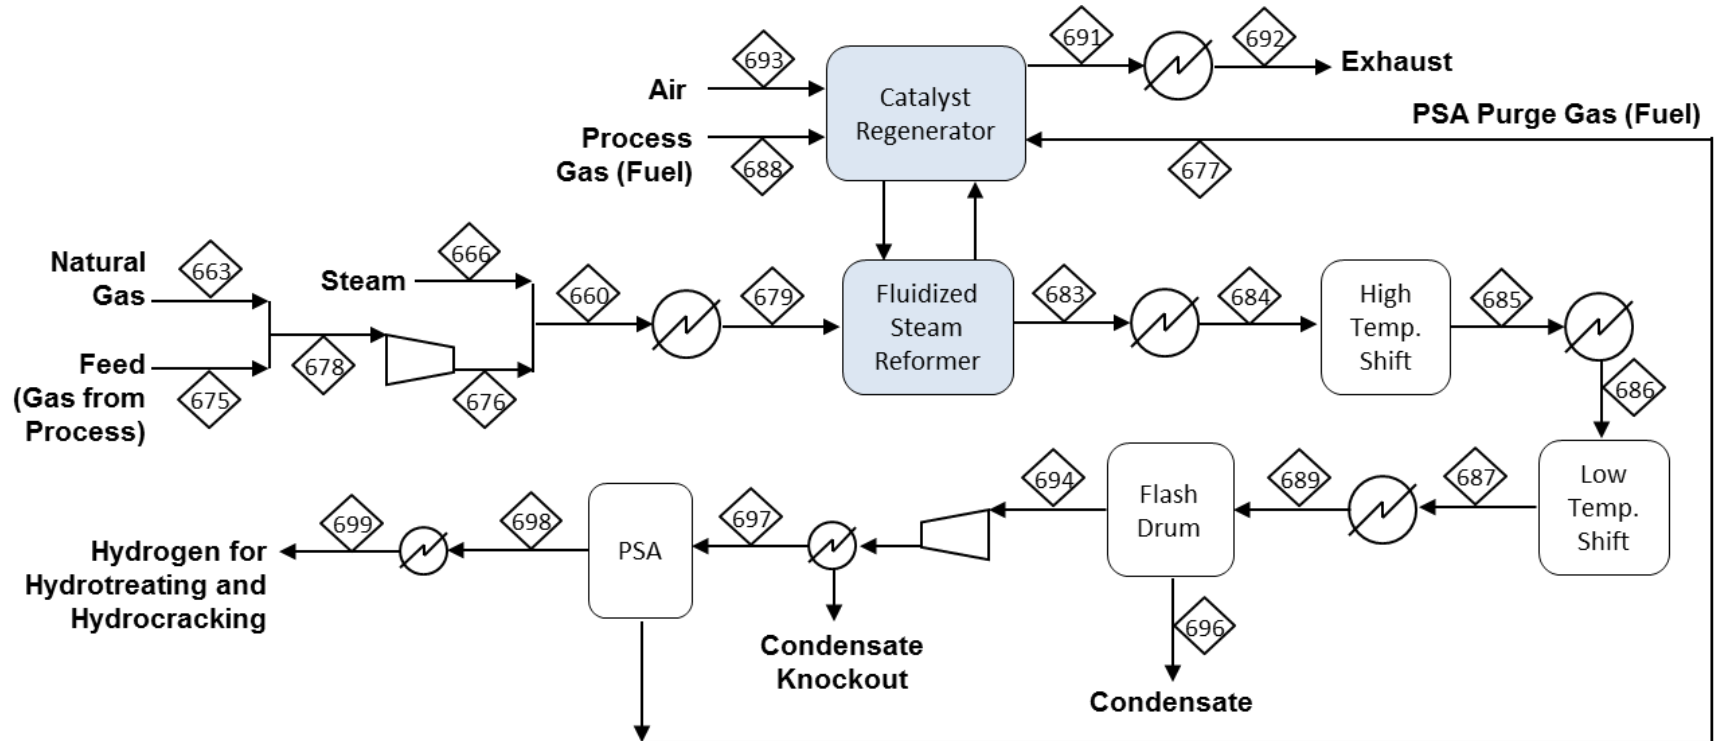Appendix D1: CFB Reformer Heat and Material Balances



| | | | | | | | | | | | | | | | | | | | | | | | | |
|--------------------------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|------|------|--|
| Temp F | 341 | 60 | 307 | 245 | 477 | 120 | 220 | 1600 | 1670 | 662 | 788 | 392 | 430 | 245 | 110 | 1800 | 685 | 278 | 110 | 110 | 120 | 120 | 77 | |
| Pres psia | 74 | 22 | 74 | 22.7 | 75 | 35 | 22 | 69 | 66 | 61 | 56 | 51 | 46 | 22.7 | 30 | 22.7 | 20.7 | 31 | 30 | 30 | 350 | 340 | 283 | |
| Vapor Frac | 1.00 | 1.00 | 0.98 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 0.68 | 1.00 | 1.00 | 1.00 | 1.00 | 0.00 | 0.99 | 1.00 | 1.00 | |
| Total lb/hr | 169689 | 5550.843 | 125879.3 | 38258.84 | 43809.69 | 86980.16 | 43809.69 | 169689 | 169689 | 169689 | 169689 | 169689 | 169689 | 9708.333 | 169689 | 341278.3 | 341278.3 | 244589.8 | 100578.2 | 69110.8 | 96821.16 | 9841 | 9841 | |
| Flow rates in lb/hr | | | | | | | | | | | | | | | | | | | | | | | | |
| Argon | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 3085.818 | 3085.818 | 3085.818 | 0 | 0 | 0 | 0 | 0 | |
| Oxygen | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 9249.105 | 9249.105 | 55494.63 | 0 | 0 | 0 | 0 | 0 | |
| Nitrogen | 90.582 | 90.582 | 0 | 0 | 90.582 | 90.581 | 90.582 | 90.582 | 90.582 | 90.582 | 90.582 | 90.582 | 90.582 | 0 | 90.582 | 181199.6 | 181199.6 | 181109.1 | 90.582 | 0.001 | 90.581 | 0 | 0 | |
| Ammonia | 0 | 0 | 0 | 0 | 0 | 0.022 | 0 | 0 | 0.039 | 0.039 | 0.039 | 0.039 | 0.039 | 0 | 0.039 | 0 | 0 | 0 | 0.024 | 0.015 | 0.022 | 0 | 0 | |
| Hydrogen sulfide | 16.417 | 0 | 0 | 16.417 | 16.417 | 16.4 | 16.417 | 16.417 | 16.417 | 16.417 | 16.417 | 16.417 | 16.417 | 4.166 | 16.417 | 0 | 0 | 0 | 16.404 | 0.013 | 16.4 | 0 | 0 | |
| Sulfur dioxide | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 38.659 | 38.659 | 0 | 0 | 0 | 0 | 0 | 0 | |
| Nitrogen dioxide | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0.087 | 0.087 | 0 | 0 | 0 | 0 | 0 | 0 | |
| Carbon monoxide | 4909.797 | 0 | 0 | 4909.797 | 4909.797 | 554.691 | 4909.797 | 4909.797 | 27942.32 | 27942.32 | 6587.56 | 6587.56 | 554.699 | 1245.88 | 554.699 | 0 | 0 | 0 | 554.693 | 0.007 | 554.691 | 0 | 0 | |
| Carbon dioxide | 13883.71 | 42.692 | 0 | 13841.01 | 13883.71 | 79108.88 | 13883.71 | 13883.71 | 36110.88 | 36110.88 | 69663.37 | 69663.37 | 79142.17 | 3512.212 | 79142.17 | 106982.9 | 106982.9 | 112.818 | 79114.51 | 27.658 | 79108.88 | 0 | 0 | |
| Hydrogen | 1691.841 | 0 | 0 | 1691.841 | 1691.841 | 1736.647 | 1691.841 | 1691.841 | 9606.774 | 9606.774 | 11143.65 | 11143.65 | 11577.83 | 429.311 | 11577.83 | 0 | 0 | 0 | 11577.69 | 0.144 | 11577.65 | 9841 | 9841 | |
| Methane | 10068.9 | 4876.221 | 0 | 5192.678 | 10068.9 | 2014.029 | 10068.9 | 10068.9 | 2014.074 | 2014.074 | 2014.074 | 2014.074 | 2014.074 | 1317.663 | 2014.074 | 0 | 0 | 0 | 2014.038 | 0.036 | 2014.029 | 0 | 0 | |
| Ethane | 4321.405 | 320.862 | 0 | 4000.543 | 4321.405 | 43.202 | 4321.405 | 4321.405 | 43.214 | 43.214 | 43.214 | 43.214 | 43.214 | 1015.154 | 43.214 | 0 | 0 | 0 | 43.204 | 0.01 | 43.202 | 0 | 0 | |
| Propane | 2459.597 | 142.587 | 0 | 2317.01 | 2459.597 | 245.876 | 2459.597 | 2459.597 | 245.959 | 245.959 | 245.959 | 245.959 | 245.959 | 587.951 | 245.959 | 0 | 0 | 0 | 245.892 | 0.067 | 245.876 | 0 | 0 | |
| Ethylene | 186.737 | 0 | 0 | 186.737 | 186.737 | 18.668 | 186.737 | 186.737 | 18.674 | 18.674 | 18.674 | 18.674 | 18.674 | 47.385 | 18.674 | 0 | 0 | 0 | 18.669 | 0.005 | 18.668 | 0 | 0 | |
| Propylene | 130.77 | 0 | 0 | 130.77 | 130.77 | 13.072 | 130.77 | 130.77 | 13.077 | 13.077 | 13.077 | 13.077 | 13.077 | 33.183 | 13.077 | 0 | 0 | 0 | 13.073 | 0.004 | 13.072 | 0 | 0 | |
| Water | 126001.5 | 0 | 125879.3 | 122.187 | 122.187 | 2546.478 | 122.187 | 126001.5 | 92994.2 | 92994.2 | 79259.59 | 79259.59 | 75379.47 | 31.006 | 75379.47 | 40722.1 | 40722.1 | 4787.493 | 6297.689 | 69081.78 | 2546.478 | 0 | 0 | |
| Pyridine | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0.001 | 0.001 | 0.001 | 0.001 | 0.001 | 0 | 0.001 | 0 | 0 | 0 | 0 | 0.001 | 0 | 0 | 0 | |
| Acids | 1.882 | 0 | 0 | 1.882 | 1.882 | 0.005 | 1.882 | 1.882 | 0.188 | 0.188 | 0.188 | 0.188 | 0.188 | 0.478 | 0.188 | 0 | 0 | 0 | 0.012 | 0.176 | 0.005 | 0 | 0 | |
| Ketones | 6.781 | 0 | 0 | 6.781 | 6.781 | 0.004 | 6.781 | 6.781 | 0.678 | 0.678 | 0.678 | 0.678 | 0.678 | 1.721 | 0.678 | 0 | 0 | 0 | 0.022 | 0.656 | 0.004 | 0 | 0 | |
| Nitrogen compounds | 0.278 | 0 | 0 | 0.278 | 0.278 | 0 | 0.278 | 0.278 | 0 | 0 | 0 | 0 | 0 | 0.07 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | |
| N-butane | 2391.6 | 65.78 | 0 | 2325.82 | 2391.6 | 239.067 | 2391.6 | 2391.6 | 239.16 | 239.16 | 239.16 | 239.16 | 239.16 | 590.186 | 239.16 | 0 | 0 | 0 | 239.084 | 0.076 | 239.067 | 0 | 0 | |
| N-pentane | 2126.098 | 9.332 | 0 | 2116.766 | 2126.098 | 212.52 | 2126.098 | 2126.098 | 212.61 | 212.61 | 212.61 | 212.61 | 212.61 | 537.138 | 212.61 | 0 | 0 | 0 | 212.536 | 0.074 | 212.52 | 0 | 0 | |
| Short chain n-paraffins | 800.922 | 2.787 | 0 | 798.136 | 800.922 | 80.057 | 800.922 | 800.922 | 80.092 | 80.092 | 80.092 | 80.092 | 80.092 | 202.53 | 80.092 | 0 | 0 | 0 | 80.063 | 0.03 | 80.057 | 0 | 0 | |
| Medium chain n-paraffins | 1.479 | 0 | 0 | 1.479 | 1.479 | 0.148 | 1.479 | 1.479 | 0.148 | 0.148 | 0.148 | 0.148 | 0.148 | 0.375 | 0.148 | 0 | 0 | 0 | 0.148 | 0 | 0.148 | 0 | 0 | |
| Decane | 14.837 | 0 | 0 | 14.837 | 14.837 | 1.483 | 14.837 | 14.837 | 1.484 | 1.484 | 1.484 | 1.484 | 1.484 | 3.765 | 1.484 | 0 | 0 | 0 | 1.483 | 0 | 1.483 | 0 | 0 | |
| Iso-paraffin B | 87.78 | 0 | 0 | 87.78 | 87.78 | 8.771 | 87.78 | 87.78 | 8.778 | 8.778 | 8.778 | 8.778 | 8.778 | 22.275 | 8.778 | 0 | 0 | 0 | 8.772 | 0.006 | 8.771 | 0 | 0 | |
| Cyclo C5 A | 65.376 | 0 | 0 | 65.376 | 65.376 | 6.534 | 65.376 | 65.376 | 6.538 | 6.538 | 6.538 | 6.538 | 6.538 | 16.589 | 6.538 | 0 | 0 | 0 | 6.534 | 0.003 | 6.534 | 0 | 0 | |
| Cyclo C6 A | 228.142 | 0 | 0 | 228.142 | 228.142 | 22.79 | 228.142 | 228.142 | 22.814 | 22.814 | 22.814 | 22.814 | 22.814 | 57.892 | 22.814 | 0 | 0 | 0 | 22.794 | 0.02 | 22.79 | 0 | 0 | |
| Diphenyl compounds | 0.02 | 0 | 0 | 0.02 | 0.02 | 0.002 | 0.02 | 0.02 | 0.002 | 0.002 | 0.002 | 0.002 | 0.002 | 0.005 | 0.002 | 0 | 0 | 0 | 0.002 | 0 | 0.002 | 0 | 0 | |
| Indans | 2.589 | 0 | 0 | 2.589 | 2.589 | 0.258 | 2.589 | 2.589 | 0.259 | 0.259 | 0.259 | 0.259 | 0.259 | 0.657 | 0.259 | 0 | 0 | 0 | 0.258 | 0.001 | 0.258 | 0 | 0 | |
| Polynuclear aromatics | 0.009 | 0 | 0 | 0.009 | 0.009 | 0.001 | 0.009 | 0.009 | 0.001 | 0.001 | 0.001 | 0.001 | 0.001 | 0.002 | 0.001 | 0 | 0 | 0 | 0.001 | 0 | 0.001 | 0 | 0 | |
| Phenols | 0.088 | 0 | 0 | 0.088 | 0.088 | 0.001 | 0.088 | 0.088 | 0.009 | 0.009 | 0.009 | 0.009 | 0.009 | 0.022 | 0.009 | 0 | 0 | 0 | 0.001 | 0.008 | 0.001 | 0 | 0 | |
| N-paraffin-HCK product A | 1.04 | 0 | 0 | 1.04 | 1.04 | 0.104 | 1.04 | 1.04 | 0.104 | 0.104 | 0.104 | 0.104 | 0.104 | 0.264 | 0.104 | 0 | 0 | 0 | 0.104 | 0 | 0.104 | 0 | 0 | |
| Cyclo C6-HCK products | 9.713 | 0 | 0 | 9.713 | 9.713 | 0.971 | 9.713 | 9.713 | 0.971 | 0.971 | 0.971 | 0.971 | 0.971 | 2.465 | 0.971 | 0 | 0 | 0 | 0.971 | 0.001 | 0.971 | 0 | 0 | |
| N-paraffin-HCK product B | 1.62 | 0 | 0 | 1.62 | 1.62 | 0.162 | 1.62 | 1.62 | 0.162 | 0.162 | 0.162 | 0.162 | 0.162 | 0.411 | 0.162 | 0 | 0 | 0 | 0.162 | 0 | 0.162 | 0 | 0 | |
| Cyclo C6 B | 5.213 | 0 | 0 | 5.213 | 5.213 | 0.521 | 5.213 | 5.213 | 0.521 | 0.521 | 0.521 | 0.521 | 0.521 | 1.323 | 0.521 | 0 | 0 | 0 | 0.521 | 0 | 0.521 | 0 | 0 | |
| Aromatic A | 33.55 | 0 | 0 | 33.55 | 33.55 | 3.35 | 33.55 | 33.55 | 3.355 | 3.355 | 3.355 | 3.355 | 3.355 | 8.514 | 3.355 | 0 | 0 | 0 | 3.35 | 0.005 | 3.35 | 0 | 0 | |
| Pyrenes | 0.002 | 0 | 0 | 0.002 | 0.002 | 0 | 0.002 | 0.002 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | |
| Iso-paraffin A | 141.733 | 0 | 0 | 141.733 | 141.733 | 14.168 | 141.733 | 141.733 | 14.173 | 14.173 | 14.173 | 14.173 | 14.173 | 35.965 | 14.173 | 0 | 0 | 0 | 14.169 | 0.004 | 14.168 | 0 | 0 | |
| Indenes | 0.2 | 0 | 0 | 0.2 | 0.2 | 0.02 | 0.2 | 0.2 | 0.02 | 0.02 | 0.02 | 0.02 | 0.02 | 0.051 | 0.02 | 0 | 0 | 0 | 0.02 | 0 | 0.02 | 0 | 0 | |
| Naphthalenes | 0.205 | 0 | 0 | 0.205 | 0.205 | 0.02 | 0.205 | 0.205 | 0.02 | 0.02 | 0.02 | 0.02 | 0.02 | 0.052 | 0.02 | 0 | 0 | 0 | 0.02 | 0 | 0.02 | 0 | 0 | |
| Bicyclos | 0.567 | 0 | 0 | 0.567 | 0.567 | 0.057 | 0.567 | 0.567 | 0.057 | 0.057 | 0.057 | 0.057 | 0.057 | 0.144 | 0.057 | 0 | 0 | 0 | 0.057 | 0 | 0.057 | 0 | 0 | |
| Cyclo C7+ | 2.8 | 0 | 0 | 2.8 | 2.8 | 0.28 | 2.8 | 2.8 | 0.28 | 0.28 | 0.28 | 0.28 | 0.28 | 0.71 | 0.28 | 0 | 0 | 0 | 0.28 | 0 | 0.28 | 0 | 0 | |
| Aromatic B | 3.209 | 0 | 0 | 3.209 | 3.209 | 0.32 | 3.209 | 3.209 | 0.321 | 0.321 | 0.321 | 0.321 | 0.321 | 0.814 | 0.321 | 0 | 0 | 0 | 0.32 | 0.001 | 0.32 | 0 | 0 | |
| Phenanthrenes | 0.008 | 0 | 0 | 0.008 | 0.008 | 0.001 | 0.008 | 0.008 | 0.001 | 0.001 | 0.001 | 0.001 | 0.001 | 0.002 | 0.001 | 0 | 0 | 0 | 0.001 | 0 | 0.001 | 0 | 0 | |
| 1,2,3,4-Naphthalenes | 0.009 | 0 | 0 | 0.009 | 0.009 | 0.001 | 0.009 | 0.009 | 0.001 | 0.001 | 0.001 | 0.001 | 0.001 | 0.002 | 0.001 | 0 | 0 | 0 | 0.001 | 0 | 0.001 | 0 | 0 | |

Appendix D2: CFB Reformer Capital and Operating Costs

This section details the equipment assumptions and specifications for the alternate hydrogen plant configuration that uses a CFB reformer. Table D-1 lists the equipment and cost estimates for hydrogen production using a fluidized bed reformer system. Capital costs for some common equipment items (e.g., tanks, pumps, vessels) are based on the recent NREL study (Dutta 2011). The fluidized bed reformer package including a dual fluidized bed loop, cyclones and ancillaries was estimated from a prior cost estimation study (Dutta 2011, Worley 2012). HTS, LTS, and PSA capital were based on Spath et al. (2005).

Table D-1. Capital Cost Estimate for Fluidized Bed Reformer (2011 k\$).

| Equipment Description | TPEC | TIC | Source |
|-------------------------------------|---------------|---------------|------------------------------------|
| Fluidized bed Reformer Module | 7,007 | 16,186 | (Dutta 2011) |
| Reformer Feed Preheater | 3,049 | 7,626 | (Dutta 2011) |
| PSA Air-cooled Precooler | 151 | 373 | (Spath 2005) |
| PSA Water-cooled Precooler | 83 | 206 | (Spath 2005) |
| High Temperature Shift Reactor | 457 | 1,128 | (Spath 2005) |
| Low Temperature Shift Reactor | 317 | 783 | (Spath 2005) |
| Pre-PSA Knock-out #1 | 124 | 306 | (Spath 2005) |
| Pressure Swing Adsorption Unit | 2,112 | 3,900 | (Vendor Quote – Harris Group 2012) |
| PSA Compressor | 10,721 | 19,298 | (Dutta 2011) |
| PSA Compressor Air Cooler | 291 | 875 | (Dutta 2011) |
| Steam Turbine Condenser | 4,147 | 5,806 | (Dutta 2011) |
| Process Steam Generator | 3,371 | 8,430 | (Dutta 2011) |
| High Pressure Steam BFW Preheater | 1,891 | 4,729 | (Dutta 2011) |
| High Pressure Steam Generator | 2,396 | 5,993 | (Dutta 2011) |
| High Pressure Steam Superheater | 1,199 | 2,998 | (Dutta 2011) |
| Blowdown Cooler | 46 | 200 | (Dutta 2011) |
| Blowdown Cooler 2 | 11 | 47 | (Dutta 2011) |
| Hot Process Water Softener System | 1,046 | 1,203 | (Dutta 2011) |
| Hot Process Water Softener System 2 | 1,079 | 1,241 | (Dutta 2011) |
| Makeup Pump | 7 | 31 | (Dutta 2011) |
| Makeup Pump 2 | 13 | 63 | (Dutta 2011) |
| Condensate Pump | 18 | 81 | (Dutta 2011) |
| Condensate Pump 2 | 15 | 69 | (Dutta 2011) |
| Water Softener Pump | 18 | 81 | (Dutta 2011) |
| Water Softener Pump 2 | 15 | 69 | (Dutta 2011) |
| Deaerator Feed Pump | 15 | 63 | (Dutta 2011) |
| Boiler Feed Water Pump | 376 | 509 | (Dutta 2011) |
| Boiler Feed Water Pump 2 | 444 | 601 | (Dutta 2011) |
| Blowdown Flash Drum | 37 | 127 | (Dutta 2011) |
| Blowdown Flash Drum 2 | 27 | 91 | (Dutta 2011) |
| Deaerator Feed Water Tank | 9 | 56 | (Dutta 2011) |
| Deaerator | 17 | 84 | (Dutta 2011) |
| Deaerator Packed Column | 6 | 30 | (Dutta 2011) |
| Steam Drum | 58 | 133 | (Dutta 2011) |
| Steam Drum 2 | 48 | 109 | (Dutta 2011) |
| Cooling Tower System | 65 | 161 | (Dutta 2011) |
| Cooling Water Pump | 313 | 669 | (Dutta 2011) |
| Water Make-Up Pump | 7 | 31 | (Dutta 2011) |
| Water Make-Up Pump 2 | 13 | 63 | (Dutta 2011) |
| Total | 41,018 | 84,447 | |

Equipment costs were scaled using the process simulation material and energy balances. Equipment costs were adjusted to the 2011 U.S. dollar basis using the Chemical Engineering Indices.

The associated variable operation costs, and utilities are shown in Tables D-2- and D-3. Unit costs are consistent with Table 29 and Appendix C of Dutta 2011. Variable operating costs are determined based on raw materials, utilities, and waste handling charges incurred only during the process operation. The Inorganic Cost Index was used to convert unit costs from 2007 dollars to 2011 dollars.

Table D-2. Variable Operating Costs.

| Variable | Unit Cost | | Amount | | Operating Cost | | Reference |
|--|-----------|---------|--------|----------|----------------|-------|--------------|
| | (2011\$) | | | | (2011\$) | | |
| Reformer Catalyst ¹ | 2,166 | ¢/ton | 9.36 | lb/hr | 0.10 | \$/hr | (Dutta 2011) |
| ZnO & Shift Catalysts ² | 2,166 | ¢/ton | 0 | lb/hr | 0.00 | \$/hr | (Dutta 2011) |
| Natural Gas | 76.57 | ¢/MMBtu | 113 | MMBTU/hr | 86.52 | \$/hr | (EIA 2013) |
| Boiler Feed Water Makeup | 28.79 | ¢/ton | 66,017 | lb/hr | 9.50 | \$/hr | (Dutta 2011) |
| Cooling Tower Water Makeup | 28.79 | ¢/ton | 21,423 | lb/hr | 3.08 | \$/hr | (Dutta 2011) |
| Boiler Feed Water Chemicals | 555,764 | ¢/ton | 2.20 | lb/hr | 6.11 | \$/hr | (Dutta 2011) |
| Cooling Tower Water Chemicals | 396,975 | ¢/ton | 0.24 | lb/hr | 0.48 | \$/hr | (Dutta 2011) |
| Wastewater | 69.37 | ¢/ton | 8451 | lb/hr | 2.93 | \$/hr | (Dutta 2011) |
| Solids Disposal Cost | 3,266 | ¢/ton | 9.36 | lb/hr | 0.15 | \$/hr | (Dutta 2011) |
| Electricity | 5.85 | ¢/kWh | 10,191 | kW | 596.17 | \$/hr | (Dutta 2011) |
| ¹ Reactor space velocity: 2,000 h ⁻¹ , Catalyst volume: 1,767 ft ³ , Required initial reformer catalyst fill: 113103 lb | | | | | | | |
| ² Required initial ZnO & WGS catalysts fill: 183453 lb. Initial fill than replaced every 5 years based on typical catalyst lifetime (Spath 2005). | | | | | | | |

Table D-3. Feed and Utilities.

| Utility | Value | Units |
|--|---------|----------------|
| Saturated steam for plant utilization (499°F, 675 psia) | 51,191 | lb/hr |
| Superheated steam (1000 °F, 660 psia) for power | 116,933 | lb/hr |
| - corresponding to power supply for steam driver with 75% efficiency | 12,633 | kWh |
| Natural gas | 5,551 | lb/hr |
| | 113 | MMBtu/hr (LHV) |
| Power consumption | 10,191 | kWh |
| Boiler feed water makeup | 66,017 | lb/hr |
| | 174 | GPM |
| Cooling tower water makeup (20 °F rise) | 21,423 | lb/hr |
| - CWS temperature, 90 °F | 56 | GPM |

Appendix E: Feedstock Supply

Feedstock logistics includes operations that take place after the biomass is produced in a field or forest, but before it is introduced into a conversion process. All activities related to feedstock logistics are directed at reducing the delivered *cost* of sustainably produced feedstock, improving and preserving the *quality* of harvested feedstock to meet the needs of biorefineries, and/or expanding the *volume* of feedstock materials accessible to the bioenergy industry. Feedstock logistics efforts are primarily focused on identifying, developing, demonstrating, and validating efficient and economic systems to harvest, collect, transport, store, and preprocess raw biomass from a variety of crops to reliably deliver high quality, high volume, and affordable feedstocks to biorefineries. Some preprocessing research takes place under the conversion technology areas, while other research is funded under feedstock logistics

Sustainably supplying the required quantities of quality, affordable feedstock to the emerging biorefining industry will be achieved through a transition from logistics systems that have been designed to meet the needs of conventional agriculture and forestry systems—termed “conventional” logistics systems—to more advanced, purpose-designed systems in the 2013 to 2022 timeframe, termed “advanced” logistics systems (Hess 2009).

Existing conventional logistics systems, which adequately serve the needs of current agriculture and forestry systems, are capable of moving biomass short distances and storing it for limited periods of time. However, these conventional systems can be restrictive to the bioenergy industry. Research has focused on understanding these limitations and identifying opportunities for improvement. Examples of these limitations include an inability to address the physical and chemical variability that exists in biomass materials or to access diverse and distributed resources across the nation to satisfy the needs of an expanding biorefinery industry.

The development of advanced, infrastructure-compatible feedstocks is projected to provide a commodity-based, specification-driven system to supply the bioenergy industry. The U.S. grain commodity system serves as one example for a conceptual model for the type of feedstock handling system that will be needed to ensure biomass quality and performance in the supply chain. It also serves as a model for in-feed systems for a variety of conversion processes that envisions similar supply system infrastructure for a broad range of biomass resources, enables commodity biomass feedstocks with predictable physical and chemical characteristics, enables biomass storage over fairly long periods of time; improves transportability over relatively long distances, and enables many end uses.

As illustrated in Figure E-1, the advanced Terrestrial Feedstock Processing Supply and Logistics System is envisioned to draw in presently inaccessible and/or underused resources via local biomass preprocessing depots that format biomass into a stable, bulk, densified, and flowable material. The formatted biomass will be transported to one or more of a network of much larger supply terminals, where the material aggregated from a number of depots may be blended and/or further preprocessed to meet the specification required by each biorefinery conversion process (note that feedstock specifications may differ substantially, depending upon the actual conversion process). The advanced biomass logistics system design incrementally incorporates technology and other system improvements as the industry matures. This improved series of feedstock supply and logistics system designs will couple to, and build from, current systems and address science and engineering constraints that have been identified by rigorous sensitivity analyses as having the greatest impact on feedstock supply and logistics system efficiencies and costs. The introduction of advanced preprocessing operations and sequences, including the implementation of blending and

formulation strategies, is critical to achieving feedstock cost, quality, and volume targets to meet Office 2017 and 2022 goals.

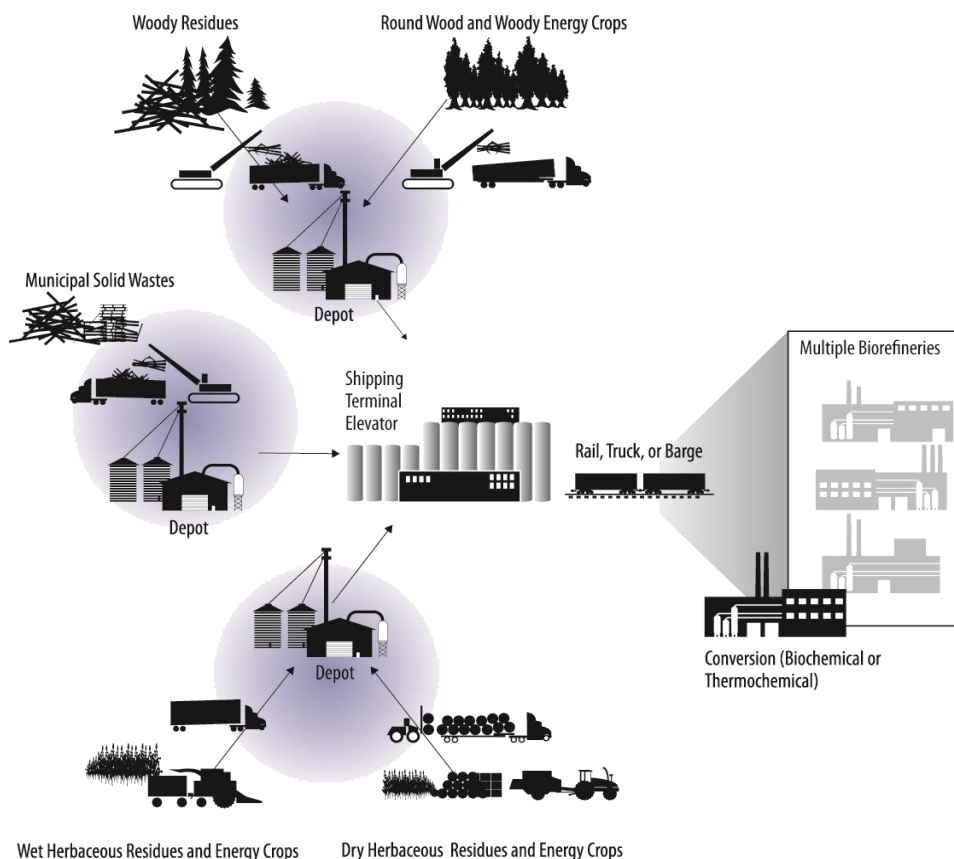


Figure E-1. Wood Biomass Feedstock Supply System.

The physical properties of raw biomass directly influence efficiency of transport and handling systems, as well as conveyance operations within the biorefinery that deliver feedstock to the conversion process reactor throat. Physical properties of feedstock, such as particle size and particle size distribution, can also significantly impact conversion process performance.

To meet longer-term goals and to support a growing bioenergy industry, research must expand its horizon beyond reliance on high-yielding biomass regions (such as the Corn Belt) to increase the amount of cellulosic feedstock available for energy production while increasing the emphasis on quality and reducing variability. One aspect of the inherent variability of biomass is illustrated by the ash content found in a wide array of corn stover samples, as shown in Table E-1. Table E-1 data were extracted from Templeton et al. (2009), where 500 samples were taken from 47 locations, including eight U.S. Corn Belt states over three harvest years.

Table E-1. Example of Variability in Corn Stover Composition.

| Corn Stover Composition | | |
|-------------------------|---------|---------|
| Parameter | Minimum | Maximum |
| Ash | 0.8% | 6.6% |
| Xylan | 14.8% | 22.7% |
| Lignin | 11.2% | 17.8% |

In response to the variability in biomass quality, more robust biofuel conversion technologies are being developed, even though it is unlikely a single best conversion technology will be capable of handling the variability experienced within raw biomass feedstocks. Additionally current discussions are predominantly around the impact of ash on the production of bio-oils, however, the elemental ash components in bio-oil offer challenges and opportunities for the implementation of upgrading. As we move forward research on improved ash inventory and speciation will be developed in order to reach an optimal solution from either enhanced specific ash element(s) removal or improvements towards more robust conversion. Currently, eight biofuel conversion pathways have currently been identified and have active R&D programs. Other approaches to addressing the variability include blending/formulation, leaching, densification, and other preprocessing options.

The first aspect of this approach is in changing the manner in which prices for feedstocks are reported. In previous reports of feedstock availability by cost, researchers have used supply volumes available at the marginal cost of acquiring additional resources. Essentially, the simulated buyer in this instance stops purchasing when the price reaches a certain limit. In Table E-2, these volumes are reported in the column entitled “Marginal price reporting” for year 2017 with a farm gate price limit of \$60/dry ton. The \$60/dry ton price target reflects the cost to access biomass at the farm gate or the forest landing¹. Reporting marginal cost limits may not reflect the true behavior of an open feedstock market. If feedstock buyers are instead targeting an average price for purchased feedstocks, they may mix more expensive resources with less expensive ones of the same type to achieve an average farm gate cost of \$60/dry ton. The volumes acquired nationwide at an average price of \$60/dry ton in 2017 are shown in the rightmost column of Table E-2. This does not physically change anything in the system, only the way costs and volumes are reported. However, it helps when assessing the entire supply chain to work with average costs instead of marginal costs. Note that by reporting volumes available based on average prices, the national feedstock availability increases from 298 million dry tons to 326 million dry tons in 2017, a difference of 28 million dry tons.²

Table E-2. Potential Increase in Volume of Biomass Available as a Result of Blending Biomass at an Example Grower Payment of \$40/dry ton (KDF 2013).

| National feedstock supply for 2017 at \$40/dry ton | | Supply (million dry ton/yr) | Supply (million dry ton/yr) |
|--|--------------------------------------|-----------------------------|-----------------------------|
| Resource | | No Blending | Intra feedstock blending |
| Agricultural Residues | Corn Stover | 13.87 | 22.74 |
| | Cereal Straw | 3.21 | 5.27 |
| Energy Crops | Herbaceous energy crops | 4.61 | 7.56 |
| | Woody energy crops | 0.01 | 0.01 |
| Forest Resources | Pulpwood | 0.02 | 0.06 |
| | Logging residues and fuel treatments | 101.17 | 164.02 |
| | Other forestland removals | 36.95 | 60.22 |
| | Urban and mill wood wastes | 4.56 | 7.79 |
| Potential feedstock supply (Totals) | | 164.4 | 267.67 |

¹ Note that this is not the same as the Grower payment. Grower payments are those made to biomass producers over and above the costs incurred for harvest, collection, storage, preprocessing, and transport. The Office models the grower payment based on anticipated biomass demand. For more information on grower payments, see: Robert Perlack, Bryce Stokes et al., “U.S. Billion-Ton Update: Biomass Supply for a Bioenergy and Bioproducts Industry,” Oak Ridge National Laboratory, ORNL/TM-2011/224, 2011, http://www1.eere.energy.gov/biomass/pdfs/billion_ton_update.pdf.

² Volumes derived from data available at <https://www.bioenergykdf.net/>. Please refer to the Knowledge Discovery Framework for a more expansive list of grower payments and the associated quantity of biomass.

The second aspect important to consider for a nationwide bioenergy industry is the combination of cost, volume, and quality necessary for economic energy production. Quality targets can have a large impact on whether or not a particular feedstock is cost effective. One aspect of the inherent spatial and temporal variability of biomass resource quality is illustrated by the ash, xylan, and glucan distributions for Midwestern corn stover in Figure E-2. In response to the variability in biomass quality, a variety of more robust biofuel conversion technologies are being developed, even though it is unlikely a single best conversion technology will be capable of handling the variability experienced within raw biomass feedstocks. Other approaches to addressing the variability include blending/formulation, leaching, densification, and other preprocessing options.

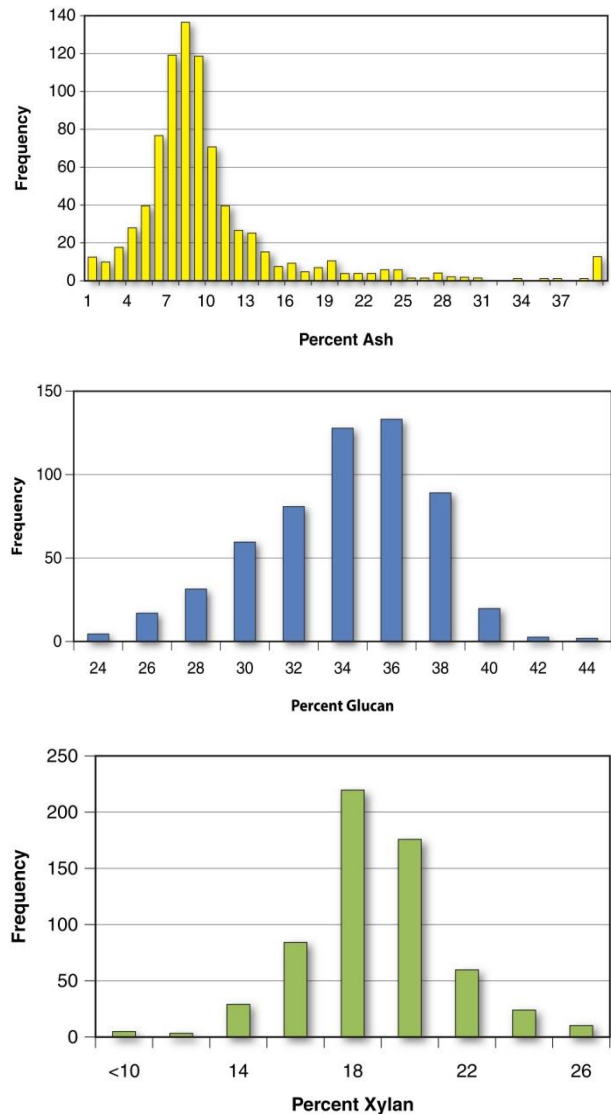


Figure E-2. Example of the Spatial and Temporal Variability of Corn Stover Characteristics such as % Ash Content, % Glucan Content and % Xylan.

Data extracted from the Biomass R&D Library

By combining analyses using average farm gate price assumptions with quality information obtained from the Biomass R&D Library, gains in the projected volumes available at cost and biorefinery specifications are being realized by transitioning to a blended feedstock approach. Feedstock blending allows a theoretical biorefinery to collect less of any one feedstock and thus move down the cost vs. supply curve, paying a lower average price for each feedstock. Not that this does not change the supply vs. cost curves for each resource, but it instead describes a system where purchasers are using a combination of least-cost resources and blending them to reach the bioenergy application's desired specification.

With blended feedstocks, biomass quality is a key aspect to consider when analyzing cost and volume availability. Formulating a designed feedstock through blending and other pre-processing logistical methods allows low cost and typically low quality biomass to be blended with biomass of higher cost and typically higher quality to achieve the specifications at the in-feed of a conversion facility. The use of low cost biomass allows the supply chain to implement additional preprocessing technologies that actively control feedstock quality, while also bringing more biomass into the system. This analysis and design approach is being called the "least-cost formulation" strategy.

Along with farm gate price, volume, and quality, a key consideration is feedstock logistics cost, which includes costs of harvest, collection, preprocessing, transportation, and storage. There are a variety of factors that influence logistics cost, including feedstock type, biomass yield per unit of land area, preprocessing strategies required to achieve conversion specifications, storage requirements, transportation distance, and dry matter losses throughout the supply system. Research is directed at reducing these logistics costs, moving towards the gradual attainment of Office targets by 2017.

Regional biomass production supply curves from the US Billion Ton Update³ were used to identify "high impact"⁴ scenarios to develop and demonstrate the 2017 feedstock supply chain scenarios at the \$80/dry ton target. A scenario below focuses on a Southeastern US scenario delivering a formulated feedstock for fast pyrolysis conversion pathway that produces a bio-oil. It is important to note that the baseline scenarios are regionally focused to establish feedstock costs and technical performance requirements of the supply chain; however, the supply chain technologies and designs are broadly applicable across the US.

Using a least-cost formulation spatial tool developed at INL, a high impact formulation based on forest thinning, logging residues, and plantation-grown loblolly pine creates an opportunity to meet the feedstock cost and quality targets for the bio-oil conversion pathway. Forest thinning and logging residues are low cost resources to procure, but often have unfavorable qualities, specifically high ash content. Money saved in procuring these biomass resources (which are lower cost to procure than, say, pulpwood trees) can be applied in the supply chain to address quality issues, such as through active ash management. The identified formulation is shown in (Table E-3). The C&D wastes are incorporated because of its low access fee cost and its low ash content. This is only an example; the actual blends will be regionally based designs that take advantage of local feedstocks and their biomass characteristics. Additionally the ability to blend feedstocks to a specification has the potential to reduce some of the risks associated with the seasonality of feedstocks.

³ Robert Perlack, Bryce Stokes, et al., "U.S. Billion-Ton Update: Biomass Supply for a Bioenergy and Bioproducts Industry," Oak Ridge National Laboratory, ORNL/TM-2011/224, 2011, http://www1.eere.energy.gov/biomass/pdfs/billion_ton_update.pdf.

⁴ To be considered high impact, the feedstock must be domestically available and have the agronomically and ecologically sustainable ultimate availability potential to produce at least 1 billion gallons per year of an acceptable biofuel.

Currently, the forest thinnings and logging residues are both reduced to 1.05% ash after a chemical pretreatment. C&D wastes will undergo a low severity pre-treatment and the ash content will be reduced to 0.9%. The purpose grown pine is debarked and chipped at the landing resulting in an ash content of 0.5%. The blended material will be delivered to the conversion facility a 2 wt% ash. A further pre-treatment operation will be performed on the blended material that will reduce the ash to the required 0.9%. It is important that the pretreatment operation be inexpensive or offset the costs by improving other operations, such as conversion yields, decrease grinding or pelletizing costs. There are a number of chemical pretreatment options being explored that will reduce the ash. INL is focusing on these pretreatment technologies but the goal is to meet both the \$80 per short ton cost target and 0.9% ash specifications assumed in this report. When blended, the complete formulation meets both the cost and feedstock quality targets.

Table E-3. List of Costs and Specifications for Woody Feedstocks and Blends for Thermochemical Conversion

| Feedstock | Reactor Throat Feedstock Cost (\$/dry ton)² | Formulation Fraction (%) | % Ash Delivered to Throat of Conversion Reactor |
|-------------------------------|---|---------------------------------|--|
| Pulp | 99.38 | 30 | 0.5 |
| Logging Residues ¹ | 74.83 | 35 | 1.5 |
| Switchgrass | 80.54 | 10 | 2.8 |
| C&D Wastes | 63.77 | 25 | 0.5 |
| Formulation Totals | 80.00 | 100 | 1.1 |

¹ residues do not include costs for harvest and collection; they are moved to landing while attached to the merchantable portion of the tree (for example, timber or pulpwood)

² includes ash mitigation

The supply system design for the Southeast blends the three feedstocks (thinnings, residues, and pulpwood). Initial harvest, collection, and preprocessing (i.e., de-barking and size reduction) occur at the landing for these cost estimates while secondary preprocessing, storage, and handling occur within the gates of the biorefinery for this cost estimate. At the landing all feedstock are comminuted, however only pulpwood includes a debarking process. For pulpwood, preprocessing involves a grinder and a dryer. For thinnings and residues, preprocessing includes a chip cleaning operation as well as a dryer and grinder. Note that many potential design elements may be incorporated to meet cost targets, including densification (including high-moisture densification), ash reduction, fractionation, thermal and hydrothermal treatments, and other developing technologies.

Preliminary results on feedstock supply chains delivering material to cellulosic sugar, bio-oil, and syngas conversion pathways demonstrate that with the ability to blend multiple feedstocks and include some preprocessing operations it is possible to acquire high volumes of material, reduce feedstock variability to meet biorefinery in-feed specifications and meet the required \$80/dry ton cost of material to the throat of the biorefinery. Much more research needs to be done both on the performance of blended material as well as the blending strategies themselves, as well as other technologies incorporated into advanced designs. In addition, current pre-conversion systems are expensive, and reducing those costs is a significant barrier to meeting future cost targets. However, there is ongoing research at the National Laboratories, universities, and industry to address these challenges.

Appendix F: Compound Selection

Bio-oil Composition

Pyrolysis oil or bio-oil is a complex mixture comprising of hundreds of compounds. Only up to 40% of the compounds can be observed by gas chromatography-mass spectroscopy (GC/MS) because bio-oil typically contains a large portion of lignin and carbohydrate derived components which are nonvolatile and undetectable by GC/MS (Mullen 2009). A combination of solvent fractionation, element (C,H,N) analysis and GC chromatography is more effective for chemical characterization of the whole bio-oil (Kai Sipilä 1998). For example, pine derived bio-oil can be extracted and divided into 6 fractions using water, ether, hexane and dichloromethane (DCM). Compound types and functional groups in different fractions analyzed by GC/MS, Py-GC/MS and CHN analysis (Venderbosch 2010) are shown in Table F-1.

Table F-1. Example Chemical Types in Pine Bio-oil

| Fraction/Chemical groups | Compound types | Wt% (wet basis) Venderbosch 2010 | Wt% (wet basis), Oasmaa 2010 | Wt% (dry basis), Oasmaa 2010 |
|--------------------------|--|----------------------------------|--------------------------------------|--------------------------------------|
| Water solubles | | 75-85 | | |
| Acids, alcohols | Small acids, small alcohols | 5-10 | 6.5 Total Acids = 4.3 Alcohols = 2.2 | 8.5 Total Acids = 4.3 Alcohols = 2.2 |
| Ether-solubles | Catechols, syringols, guaiacols, aldehydes, ketones, furans and pyrans | 5-15 | 15.4 | 20.3 |
| Ether-insolubles | Sugars | 30-40 | 34.4 | 45.3 |
| Water | Water | 20-30 | 23.9 | - |
| Water insolubles | | 15-25 | | |
| Hexane-solubles | Extractives (High MW compounds with functional groups such as acids, alcohols) | 2-6 | 4.35 | 5.7 |
| DCM solubles | Stilbenes, Low MW lignin degraded compounds | 5-10 | 13.4 | 17.7 |
| DCM insolubles | High MW lignin degraded compounds | 2-10 | 1.95 | 2.6 |

Bio-oil Model Compounds

A mixture of model compounds in Table F-2 is used to represent bio-oil. The model compounds were selected based on the analysis of wood derived bio-oil published in research literature. Compounds in the Aspen Plus and CHEMCAD databases were preferred over user defined compounds for which chemical and physical properties must be inserted in the simulation, and rely on limited data. The number of model




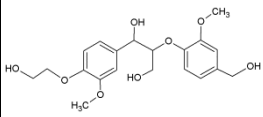

compounds representing bio-oil was also minimized to reduce complexity of the model. However, key properties of the model compound mixture such as C,H,O,N,S element analysis, density, and heating value were matched with the bio-oil for thermodynamic consistency with experimental results.

Table F-2. Model Compounds Used to Represent Bio-oil

| Compound group | Model compound | Formula | % wt (dry basis) | Reference suggesting compounds, chemical structures or functional groups |
|--|--|---|------------------|--|
| <i>Water soluble</i> | | | | |
| Acids | Crotonic acid | C ₄ H ₆ O ₂ | 5.57 | Thangalazhy-Gopakumar 2010 |
| Alcohols | 1,4-Benzenediol | C ₆ H ₆ O ₂ | 6.97 | Branca 2003; Garcia-Perez 2008; Djokic 2012 |
| Ketones | Hydroxyacetone | C ₃ H ₆ O ₂ | 8.29 | Djokic 2012; Garcia-Perez 2008 |
| Aldehydes | 3-Methoxy-4-Hydroxybenzaldehyde | C ₈ H ₈ O ₃ | 6.97 | Djokic 2012; Garcia-Perez 2008; Liu 2012; Thangalazhy-Gopakumar 2010 |
| Guaiacols | Isoeugenol | C ₁₀ H ₁₂ O ₂ | 4.98 | Branca 2003; DeSisto 2010; Thangalazhy-Gopakumar 2010; Kim 2011 |
| Low MW sugars | Levogluconan | C ₆ H ₁₀ O ₅ | 5.97 | Branca 2003; DeSisto 2010; Garcia-Perez 2008; Venderbosch 2010 |
| High MW sugars | Cellobiose | C ₁₂ H ₂₂ O ₁₁ | 33.86 | Radlein in Bridgewater 2002 |
| <i>Water insoluble</i> | | | | |
| Low MW lignin derived compound A | Dimethoxy stilbene | C ₁₆ H ₁₆ O ₂ | 10.95 | Venderbosch 2010 |
| Low MW lignin derived compound B | Dibenzofuran (representing diphenyl compounds) | C ₁₂ H ₈ O | 2.21 | Bayerbach 2006 |
| Extractives | Dehydroabietic acid | C ₂₀ H ₂₈ O ₂ | 2.99 | DeSisto 2010; Venderbosch 2010 |
| High MW lignin derived compound A | Oligomeric compounds with β-O-4 bond* | C ₂₀ H ₂₆ O ₈ | 9.15 | β-O-4 bond is the major type of linkage in wood derived lignin (Chu 2013) |
| High MW lignin derived compound B | Phenylcoumaran compounds* | C ₂₁ H ₂₆ O ₈ | 1.99 | Bayerbach 2006 |
| Nitrogen compounds | 2,4,6-trimethylpyridine | C ₈ H ₁₁ N | 0.070 | Pyridines are found as nitrogen containing compounds in bio-oil (Diebold in Bridgewater 1999 volume 1) |
| Sulfur compounds | Dibenzothiophene | C ₁₂ H ₈ S | 0.025 | Garcia-Perez 2008 |
| *Standard name is not available. Molecular structure is shown in Table F-3 and drawn based on the properties and functional groups suggested in the literature [Bayerbach 2006; Chu 2013]. | | | | |

Most of the model compounds are available in the software databases, however, several are user defined compounds: levogluconan, high MW sugars and low MW lignin derived compounds and high MW lignin. The properties are based on experimental data if available, or estimated by using the UNIFAC contribution group method and ACDlabs software. Properties of the user defined compounds are listed in Table F-3.

Table F-3. Molecular Structures, and Physical and Chemical Properties for User Defined Compounds

| Compound | Formula and Molecular Structure | Properties | | | | | | | |
|---|---|--|--|--|----------|----------------------------|---------------|--------------------------|--------------------------|
| | | Estimated by ACDlabs software, unless noted otherwise. | | Estimated by using the UNIFAC contribution group method, unless noted otherwise. | | | | | |
| | | Tbp, F | Coefficients for vapor pressure equation ¹ | Tc, F | Pc, psia | Vc, ft ³ /lbmol | Tm, F | ΔH_f , Btu/lbmol | ΔG_f , Btu/lbmol |
| Isoeugenol | C10H12O2  | 507.2 (Ref 1) | A = 50.75 B = -9430.29 C = -3.46 D = -1.17E-6 E = 2 (Ref 2) | 987.5 | 476.4 | 7.8 | 57.2 (Ref 3) | -88516.7 | -16887.1 |
| Levoglucofan | C6H10O5  | 772.8 | A = 149.33 B = -18972.6 C = -16.826 D = -4.57E-9 E = 2 (Ref 2) | 1056 | 668.9 | 3.0 | 99.5 (Ref 2) | -412740 (Ref 5) | -255625 |
| Cellobiose | C12H22O11  | 1234.2 | A = 53.01 B = -19999.5 C = -4.4294 D = -1.5E-7 E = 2 | 1281.5 | 340 | 6.8 | 462.2 (Ref 4) | -958499 (Ref 5) | -503968 |
| High MW lignin derived compound A (Oligomeric compounds with β -O-4 bond) | C20H26O8  | 1198.4 | A = 81.08 B = -20000 C = -7.036 D = 2.279E-7 E = 2 | 1482.2 | 241.9 | 15.9 | 218.3 | -498806 | -297590 |
| High MW lignin derived compound B (Phenyl-coumaran compounds) | C21H26O8  | 1172.4 | A = 85.84 B = -20000 C = -7.72 D = 3.84E-7 E = 2 | 1468.2 | 243.7 | 16.0 | 252.3 | -496040 | -284159 |

¹ $V_p = \exp [A + B/T + C \ln (T) + DT^E]$ When V_p = vapor pressure (Pa), T = temperature (K)
 Ref 1 CRC 2013
 Ref 2 Dortmund 2013
 Ref 3 Chemicaland 2013
 Ref 4 Chemical book 2013
 Ref 5_Domalski 1972

The solid char from fast pyrolysis primarily consists of carbon. The char compositions are calculated by different in the design and are comparable to the experimental results as presented in Table F-4. The char heating value is calculated by using this equation (H.H. Schobert, Lignites of North America, pp 507):

$$\text{HHV (Btu/lb)} = 146.58C + 568.78H - 51.53(O+N) - 6.58\text{Ash} + 29.45S$$

Table F-4. Characteristics of Solid Char from Fast Pyrolysis

| From | DeSisto 2010 | | | Kim 2012 | | | Gregoire 1995 Vortex reactor, wood chips | Base Case |
|--------------------|--|-------|-------|--|-------------|-------------|--|-----------|
| | Pyrolysis of pine sawdust (fluidized bed) | | | Fast pyrolysis of pitch pine (fluidized bed) | | | | |
| | 400°C | 500°C | 600°C | 300°C | 400°C | 500°C | 500°C | 500°C |
| Ash (%) | 1.45 | 1.69 | 3.51 | 4.5 ± 0.33 | 7.9 ± 0.54 | 7.7 ± 0.80 | 2.87 | 7.67 |
| C, % | 70.9 | 74.1 | 83.4 | 63.9 ± 2.04 | 70.7 ± 2.33 | 90.5 ± 1.13 | 81.8 | 83.03 |
| H, % | 4.7 | 4.4 | 3.1 | 5.4 ± 0.34 | 3.4 ± 0.09 | 2.5 ± 0.10 | 3.7 | 1.14 |
| N, % | <0.5 | <0.5 | <0.5 | 0.3 ± 0.03 | 0.4 ± 0.05 | 0.3 ± 0.04 | 0.10 | 1.37 |
| O, % | 23.0 | 21.5 | 10.0 | 30.4 ± 1.73 | 25.5 ± 2.47 | 6.7 ± 1.20 | 11.5 | 6.56 |
| O:C | 0.320 | 0.290 | 0.120 | | | | 0.141 | 0.08 |
| Total | 100.6 | 102.2 | 100.5 | | | | 99.87 | 100 |
| HHV (MJ/kg) | 28.5 | 28.05 | 29.91 | | | | | 28.81 |

Hydrotreated Oil Model Compounds

The following describes the criteria for choosing the compounds used to represent hydrotreated bio-oil. Hydrotreating of bio-oil occurs in three stages; stabilization bed, 1st stage hydrotreating reactor and 2nd stage hydrotreating reactor. The hydrotreating reactions of bio-oil are very complex. Published experimental data were generated from different reactor configurations and a wide range of process conditions.

Tables F-5, shows the mixture of model compounds used to represent the hydrotreated oil from the stabilizer and the first reactor. The intermediates in the upgrading of pyrolysis oil are selected based on the reactivity scale of oxygenated groups in Figure 6 (Elliott 2007) and the study by Vispute 2009.

The compounds and properties of the upgraded oil from the second reactor are shown in Tables F-6 and F-7. GC/MS data were used to guide the selection. Figure F-1 shows experimentally derived distillation curves that were used to help select the final fuel compounds based on their boiling points.

Table F-5. Model Compounds Representing Mild Hydrotreating Products









| Compound | Formula | Molecular structure | Hydrotreating intermediates from |
|------------------------|--|---|---------------------------------------|
| N-Butyric Acid | C ₄ H ₈ O ₂ |  | Small acids |
| 1,2-Propanediol | C ₃ H ₈ O ₂ |  | Small aldehydes, alcohols, ketones |
| Glucose | C ₆ H ₁₂ O ₆ |  | Sugars (Vispute 2009) |
| Sorbitol | C ₆ H ₁₄ O ₆ |  | Sugars (Vispute 2009) |
| HT dehydroabietic acid | C ₁₉ H ₂₈ |  | Hydrogenation of extractive compounds |
| Pinosylvin | C ₁₄ H ₁₂ O ₂ |  | Low MW derived lignin compounds |
| Indene | C ₉ H ₈ |  | High MW derived lignin compounds |
| 4-methylphenanthrene | C ₁₅ H ₁₂ |  | High MW derived lignin compounds |

Table F-6. Upgraded Oil Model Compounds

| Compound group | Model compound | Formula | % wt in upgraded oil (dry basis) |
|-----------------------|---|---------|----------------------------------|
| Normal paraffins | Hexane | C6H14 | 10.61% |
| | Dodecane | C12H26 | 6.11% |
| | Pentane | C18H38 | 3.88% |
| Iso-paraffins | 3-Methylhexane | C7H16 | 3.89% |
| | 4-methylnonane | C10H22 | 6.15% |
| Cyclopentanes | Cyclopentane, ethyl | C7H14 | 3.79% |
| | 1-methyl-1-ethylcyclopentane | C8H16 | 5.03% |
| Cyclohexanes | Cyclohexane | C6H12 | 4.86% |
| | Cyclohexane, butyl- | C10H20 | 3.67% |
| | 1,1-Bicyclohexyl | C12H22 | 3.37% |
| Cyclo C7+ | 1,3-dimethyladamantane | C12H20 | 3.44% |
| Aromatics | o-xylene | C8H10 | 7.90% |
| | Benzene, 1-ethenyl-4-ethyl- | C10H12 | 3.34% |
| Heavies | 4-methylphenanthrene | C15H12 | 6.45% |
| | Pyrene | C16H10 | 6.24% |
| Diphenyl | 1,2-Diphenylethane | C14H14 | 1.08% |
| Indanes and indenenes | Indane | C9H10 | 1.72% |
| | 1H-Indene, 1,2,3-trimethyl- | C12H14 | 1.29% |
| 1,2,3,4 Naphthalene | 1-n-Hexyl-1,2,3,4-Tetrahydronaphthalene | C16H24 | 2.51% |
| Naphthalenes | Naphthalene, 2,7-dimethyl | C12H12 | 4.31% |
| PNAs | Naphthalene, 1-phenyl- | C16H12 | 5.32% |
| Oxygenates | 5-Methyl-2-(1-methylethyl)phenol | C10H14O | 4.86% |
| Nitrogen compounds | 2,4,6-trimethylpyridine | C8H11N | 0.157% |
| Sulfur compounds | Dibenzothiophene | C12H8S | 0.025% |

Table F-7. Hydrotreated Oil Element Balances and Properties

| Characteristic | Elliott 2013 | Elliott 2012 | Base case |
|-----------------------|--------------|--------------|-----------|
| Moisture content, wt% | 0.1 | 0.01-0.03 | - |
| Carbon, wt% | 87.5 | 83.5-87.3 | 87.7 |
| Hydrogen, wt% | 12 | 11.2-13.6 | 11.8 |
| Oxygen, wt% | 0.5 | 0.2-0.3 | 0.52 |
| Nitrogen, wt% | <0.05 | <0.05 | 0.02 |
| Sulfur, wt% | <0.005 | <0.005-0.014 | 0.004 |
| HHV, MJ/kg | 45 | N/A | 44.3 |
| Density, g/ml | 0.84 | 0.76-0.87 | 0.848 |

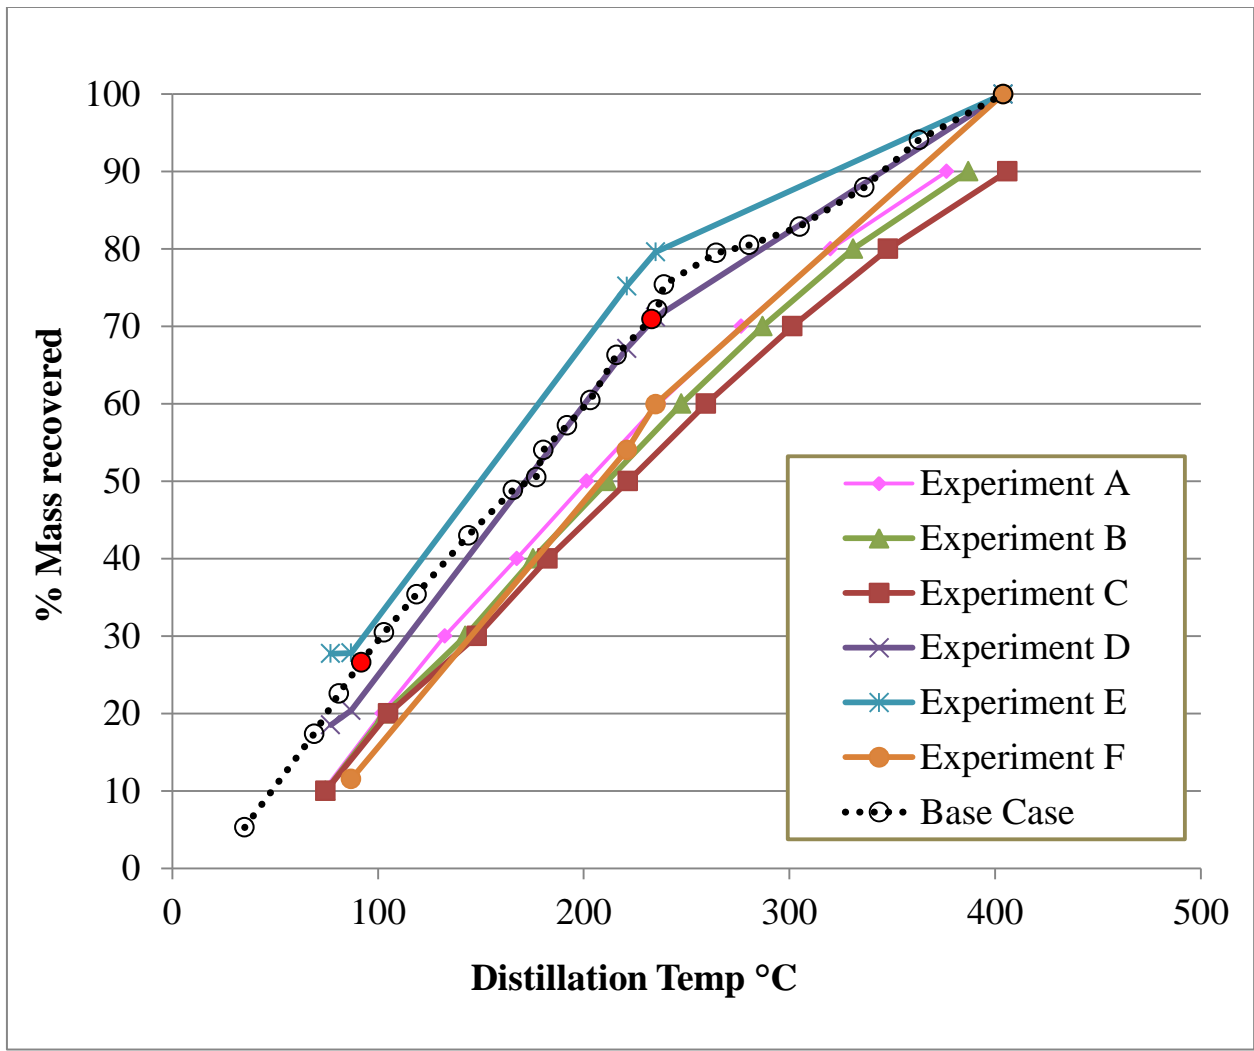


Figure F-1. Hydrotreated Oil Distillation Curve by ASTM D2887

Each model compound in the process simulation is used to represent a group of compounds having similar physical or chemical properties. Table F-8 lists of all model compounds and their generic names used in this work.

Table F-8. Model Compounds and Their Generic Names

| Generic names | Model compounds used to represent groups of similar compounds |
|---------------------------------------|--|
| 1,2,3,4-Naphthalenes | 6-Hexyltetralin |
| Acids | Crotonic acid |
| Acids Intermediates | N-Butyric acid |
| Alcohols | 1,4-Benzenediol |
| Aldehydes | 3-Methoxy-4-Hydroxybenzaldehyde |
| Aromatic A | O-Xylene |
| Aromatic B | Benzene, 1-ethenyl-4-ethyl- |
| Ash | Ash |
| Bicyclos | 1,1-Bicyclohexyl |
| Carbon | Carbon |
| Carbonyl intermediates | 1,2-Propanediol |
| Extractive intermediates | HT Dehydroabietic acid (see Table F-5) |
| Cyclo C5 A | Ethyl-cyclopentane |
| Cyclo C5 B | 1-methyl-1-ethylcyclopentane |
| Cyclo C6 A | Cyclohexane |
| Cyclo C6 B | N-Butylcyclohexane |
| Cyclo C6-HCK product | Methyl-cyclohexane |
| Cyclo C7+ | 1,3-Dimethyladamantane |
| Diphenyl compounds | 1,2-Diphenylethane |
| Extractives | Dehydroabietic acid |
| Guaiacols | Guaiacol |
| High MW lignin compound intermediates | Indene |
| High MW lignin derived A | High MW lignin derived compound A (see Table F-3) |
| High MW lignin derived B | High MW lignin derived compound B (see Table F-3) |
| High MW sugars | Cellobiose (see Table F-3) |
| Indans | Indan |
| Indenes | 1H-Indene, 1,2,3-trimethyl- |
| Iso-paraffin A | 3-Methylhexane |
| Iso-paraffin B | 4-Methylnonane |
| Ketones | Acetol |
| Low MW lignin compound intermediates | Pinosylvin |
| Low MW lignin derived B | 1,2-Diphenylethane |
| Low MW sugars | Levogluconan |
| Medium chain n-paraffins | N-Dodecane |
| Naphthalenes | 2,7 Dimethylnaphthalene |
| Nitrogen compounds | Trimethyl Pyridine |
| N-paraffin-HCK product A | N-Nonane |
| N-paraffin-HCK product B | N-Octane |
| Phenanthrenes | 4-Methylphenanthrene |
| Phenols | Thymol |
| Polynuclear aromatics | Naphthalene, 1-phenyl- |
| Pyrenes | Pyrene |
| Sand | Silicon Dioxide |
| Short chain n-paraffins | N-Hexane |
| Sugar intermediate A | Alpha-D-Glucose |
| Sugar intermediate B | Sorbitol |
| Sulfur agent | Dimethyl Sulfide |
| Sulfur compounds | Dibenzofuran |

Appendix G: Indices

Table G-1 Labor Indices

Source: Bureau of Labor Statistics
 Series ID: CEU3232500008 Chemicals
 Average Hourly Earnings of Production Workers
 Current indices at <http://data.bls.gov/cgi-bin/srgate>

| YEAR | INDEX | YEAR | INDEX |
|------|-------|------|-------|
| 2002 | 17.97 | 2007 | 19.55 |
| 2003 | 18.50 | 2008 | 19.50 |
| 2004 | 19.17 | 2009 | 20.30 |
| 2005 | 19.67 | 2010 | 21.07 |
| 2006 | 19.60 | 2011 | 21.46 |

Table G-2 Capital Cost Indices

Chemical Engineering Magazine, CEI annual index
 2012 and 2013 regressed from previous year data (DOE 2013)

| YEAR | INDEX | YEAR | INDEX |
|------|-------|------|-------|
| 1990 | 357.6 | 2002 | 395.6 |
| 1991 | 361.3 | 2003 | 402.0 |
| 1992 | 358.2 | 2004 | 444.2 |
| 1993 | 359.2 | 2005 | 468.2 |
| 1994 | 368.1 | 2006 | 499.6 |
| 1995 | 381.1 | 2007 | 525.4 |
| 1996 | 381.7 | 2008 | 575.4 |
| 1997 | 386.5 | 2009 | 521.9 |
| 1998 | 389.5 | 2010 | 550.8 |
| 1999 | 390.6 | 2011 | 585.7 |
| 2000 | 394.1 | 2012 | 617.6 |
| 2001 | 394.3 | 2013 | 649.5 |
| 2000 | 394.1 | | |

Table G-3 Inorganic Chemical Indices

Source: SRI International Chemical Economics Handbook, Economic Environment of the Chemical Industry, September 2006

Current indices at <https://www.sriconsulting.com/CEH/Private/EECI/EECI.pdf>

| YEAR | INDEX | YEAR | INDEX |
|------|-------|------|-------|
| 1990 | 123.6 | 2001 | 158.4 |
| 1991 | 125.6 | 2002 | 157.3 |
| 1992 | 125.9 | 2003 | 164.6 |
| 1993 | 128.2 | 2004 | 172.8 |
| 1994 | 132.1 | 2005 | 187.3 |
| 1995 | 139.5 | 2006 | 196.8 |
| 1996 | 142.1 | 2007 | 203.3 |
| 1997 | 147.1 | 2008 | 228.2 |
| 1998 | 148.7 | 2009 | 224.7 |
| 1999 | 149.7 | 2010 | 233.7 |
| 2000 | 156.7 | 2011 | 249.3 |

Prepared for the U.S. Department of Energy Bioenergy Technologies Office

PNNL-23053
NREL/TP-5100-61178

November 2013