



LAWRENCE
LIVERMORE
NATIONAL
LABORATORY

Extreme prepulse contrast utilizing cascaded-optical parametric amplification

I. Jovanovic, C. Haefner, B. Wattellier, C. P. J.
Barty

June 20, 2006

International Conference on Ultrahigh Intensity Lasers
Cassis, France
September 25, 2006 through September 29, 2006

Disclaimer

This document was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor the University of California nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or the University of California, and shall not be used for advertising or product endorsement purposes.

Extreme prepulse contrast utilizing cascaded-optical parametric amplification

I. Jovanovic¹, C. Haefner², B. Wattellier³, and C. P. J. Barty¹

¹Lawrence Livermore National Laboratory, 7000 East Ave., L-470, Livermore, CA 94550, USA
Phone: (925) 424-9773, FAX: (925)423-6195, email: jovanovic1@llnl.gov

²Nevada Terawatt Facility, University of Nevada, Reno, Nevada 89506

³Phasics, Campus de l'École Polytechnique, Bât. 404, 91128 Palaiseau Cedex, France

ABSTRACT

It has been shown recently that an optical parametric chirped-pulse amplifier can be easily reconfigured into a cascaded-optical parametric amplifier (COPA), enabling complete prepulse removal and optical switching with a window defined by the pump pulse duration. We have demonstrated instrument-limited measurement of the COPA prepulse contrast $>1.4 \times 10^{11}$ using 30-mJ pulses. The COPA technique is applicable to all energy ranges and pulse durations. A convenient millijoule-scale implementation of this technique is presented using a single, large-aspect-ratio quasi-phase-matched nonlinear crystal.

It has been shown previously that the use of OPCPA amplifies only a single pulse out of the oscillator pulse train resulting in a prepulse contrast enhancement equal to the total saturated gain, provided that the pump pulse duration is sufficiently short and there is no overlap in time with preceding or subsequent pulses. Notwithstanding the significant prepulse contrast enhancement, OPCPA does not remove prepulses; it merely reduces their relative peak intensity, typically on the order of 10^8 in a large laser system. Here we report the measurement of the extreme contrast enhancement of a modified OPCPA technique, termed cascaded optical parametric amplification (COPA). [1] The technique is implemented by reconfiguration of a two-stage OPCPA into a phase-conjugated COPA system. Its feasibility has been described and recently demonstrated [2]. The method removes any pre- and post-pulses in the neighborhood of the main, amplified pulse. Instrument-limited experimental measurement of the prepulse contrast of $1.4 \times 10^{11}:1$ is presented at a 30-mJ level using cascaded electro-optical modulators to protect the photodiode from damage by the main pulse.

Demonstration of a large prepulse contrast requires a high dynamic range prepulse measurement technique. We have chosen a relatively simple setup using a sensitive photodiode and a cascade of fast Pockels cells to protect the photodiode from damage by the main pulse. Pockels cells were operated such that the main pulse was rejected, while the prepulses were transmitted to the photodiode. The attenuation of the main pulse was 1.1×10^5 and was sufficient to protect the diode from damage by the main pulse. We first determined the contrast ratio for the conventional OPCPA system. The prepulse contrast was 1.4×10^8 , which is approximately equivalent to the gain of the system. We reconfigured the OPCPA setup to the COPA configuration and we could not detect any prepulses within the noise level of our instrumentation. The baseline was measured with and without COPA turned on to correct for the noise level. The noise level was $6.2 \pm 0.05 \times 10^{-3}$ on the normalized scale of Fig. 2. The main source of noise is digitizer and crosstalk effects in the oscilloscope. We determined the contrast ratio by comparing the pulse amplitude with the leading baseline ahead after subtracting the noise level, and obtained an instrument-limited contrast ratio of 1.4×10^{11} . Fig. 1 shows the comparison between OPCPA and COPA contrast measurement. The measurement dynamics were limited by the maximum available energy determining the signal to noise ratio.

We have experimentally shown that the COPA technique indeed allows extreme prepulse contrast enhancement. In principle, infinite contrast enhancement is possible by the COPA technique and is only limited by the pump pulse time duration. Within this window the COPA contrast is limited by the usual parametric fluorescence. Simple modification of a multi-stage OPCPA system results in its operation in a COPA mode, particularly for systems operating near degeneracy. Since the COPA technique does not rely on the nonlinear effects on the pulse itself, it is extraordinarily versatile. COPA can be operated at any energy level, with either stretched or compressed pulses. A particularly attractive implementation of the scheme is to operate in conjunction with quasi-phase-matched OPA, (Fig. 2) where a simple low-energy contrast enhancement can be accomplished utilizing a single OPA crystal.

This work was performed under the auspices of the U.S Department of Energy by the University of California, Lawrence Livermore National Laboratory under Contract No. W-7405-Eng-48.

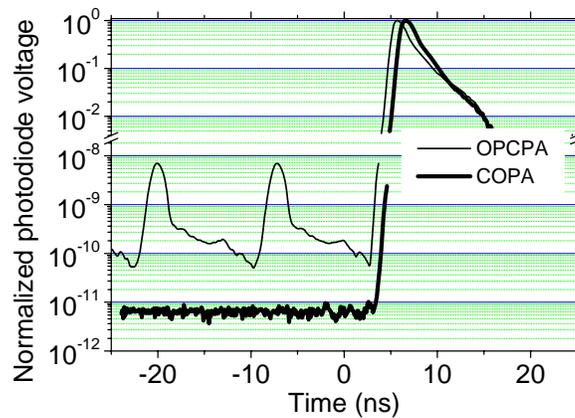


Fig. 1: (thin line) OPCPA amplifies an isolated oscillator pulse, but does not remove prepulses; (thick line) COPA removes all oscillator prepulses. The COPA pulse is shifted by 1 ns for better distinction.

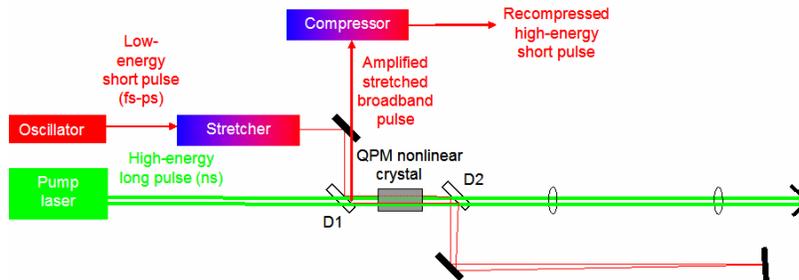


Fig. 2. Schematic for millijoule OPCPA/COPA in PPKTP. D – dichroic beamsplitter, Selection between OPCPA and COPA is accomplished by reflecting the idler instead of the signal into the second amplification pass.

References:

- [1] Wattellier, B., I. Jovanovic, and C.P.J. Barty. "Cascaded-optical parametric amplification for extreme contrast enhancement". in *Conference on Lasers and Electro-Optics (CLEO)*. 2003. Baltimore, MD, USA
- [2] Jovanovic, I., C. Haefner, B. Wattellier, and C.P.J. Barty, "Optical switching and contrast enhancement in intense laser systems by cascaded optical parametric amplification," *Opti. Lett.*, **31**, 787 (2006).