

The Rosetta Resources CO₂ Storage Project — A WESTCARB Geologic Pilot Test

Robert Trautz¹, Sally Benson¹, Larry Myer¹, Curtis Oldenburg¹, Ed Seeman², Eric Hadsell³, and Ben Funderburk²

1. Lawrence Berkeley National Laboratory, Berkeley, CA 94720
2. Rosetta Resources, Inc., Denver, CO 80202
3. Rosetta Resources, Inc., Rio Vista, CA 94571

ABSTRACT

WESTCARB, one of seven U.S. Department of Energy partnerships, identified (during its Phase I study) over 600 gigatonnes of CO₂ storage capacity in geologic formations located in the Western region. The Western region includes the WESTCARB partnership states of Alaska, Arizona, California, Nevada, Oregon and Washington and the Canadian province of British Columbia. The WESTCARB Phase II study is currently under way, featuring three geologic and two terrestrial CO₂ pilot projects designed to test promising sequestration technologies at sites broadly representative of the region's largest potential carbon sinks. This paper focuses on two of the geologic pilot studies planned for Phase II — referred to collectively as the Rosetta Resources CO₂ Storage Project. The first pilot test will demonstrate injection of CO₂ into a saline formation beneath a depleted gas reservoir. The second test will gather data for assessing CO₂ enhanced gas recovery (EGR) as well as storage in a depleted gas reservoir. The benefit of enhanced oil recovery (EOR) using injected CO₂ to drive or sweep oil from the reservoir toward a production well is well known. EGR involves a similar CO₂ injection process, but has received far less attention. Depleted natural gas reservoirs still contain methane; therefore, CO₂ injection may enhance methane production by reservoir repressurization or pressure maintenance. CO₂ injection into a saline formation, followed by injection into a depleted natural gas reservoir, is currently scheduled to start in October 2006.

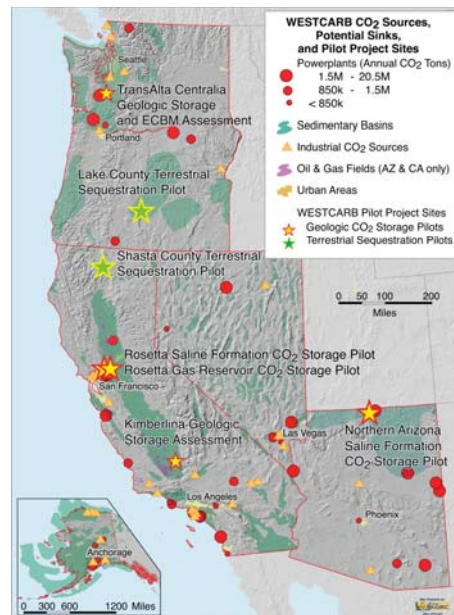


Figure 1. WESTCARB geologic pilot test locations.

PHASE II PROJECT GOALS

The primary goals of the 3-year pilot program include:

- Demonstrate the potential for safe CO₂ storage in depleted gas reservoirs and regionally extensive saline aquifers;
- Study the feasibility of using CO₂ to enhance production of natural gas from depleted gas reservoirs;
- Gain experience and establish procedures for permitting, public outreach, and monitoring and verification in WESTCARB states.

INTRODUCTION

Two of the three geologic pilot studies planned for Phase II will be performed in the Southern Sacramento Valley Region of California (Figure 2) and are collectively referred to as the Rosetta Resources CO₂ Storage Project. Rosetta Resources, Inc. is an oil and gas exploration and production company and a WESTCARB industry partner. Rosetta is the unit operator, leaseholder and partial land owner of the Rio Vista Gas Field, the largest on-shore gas field in California. Since 1936, the Rio Vista Gas Field has produced over $9.3 \times 10^{10} \text{ m}^3$ (3.3 Tcf) of natural gas. The formations at Rio Vista are representative of 128 smaller gas-producing fields in California, the cumulative storage capacity of which is estimated at 1.7 Gt. CO₂. A small abandoned gas field located near Rio Vista will be used for the Rosetta pilot tests.

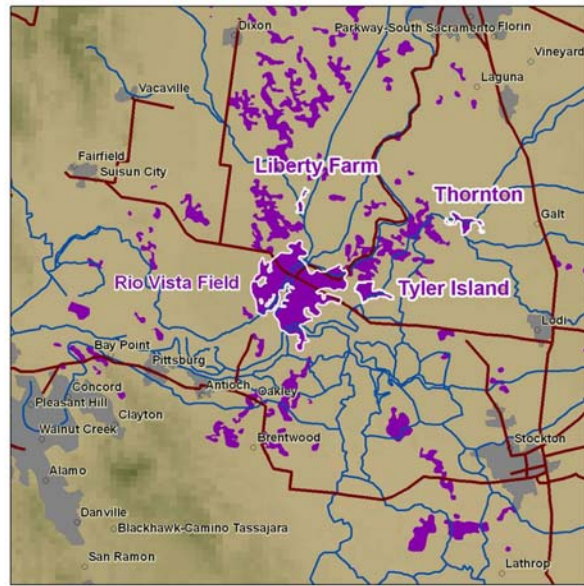


Figure 2. Southern Sacramento Valley California geologic pilot test location.

STACKED RESERVOIR TEST

A novel approach to testing, referred to as a stacked reservoir test, will be performed at the Rosetta Resources CO₂ Storage Project site. The stacked reservoir test consists of two experiments:

McCormick Sand — Saline Formation Pilot Test

The first experiment will involve injecting up to 2000 tons of CO₂ into a brine-filled zone in the McCormick sand, a very fine to medium grained, quartzitic sandstone (Figure 3). Two wells, a CO₂ injector and an observation well, will be installed in a saline zone located beneath the gas trap in the McCormick sand. Our current best estimate for the target depth of the saline test is 1067 to 1098 m (3500 to 3600 ft). Both wells will be drilled to approximately the same depth and the casing will initially be perforated in the saline zone. CO₂ injection will commence after logging and testing the wells.

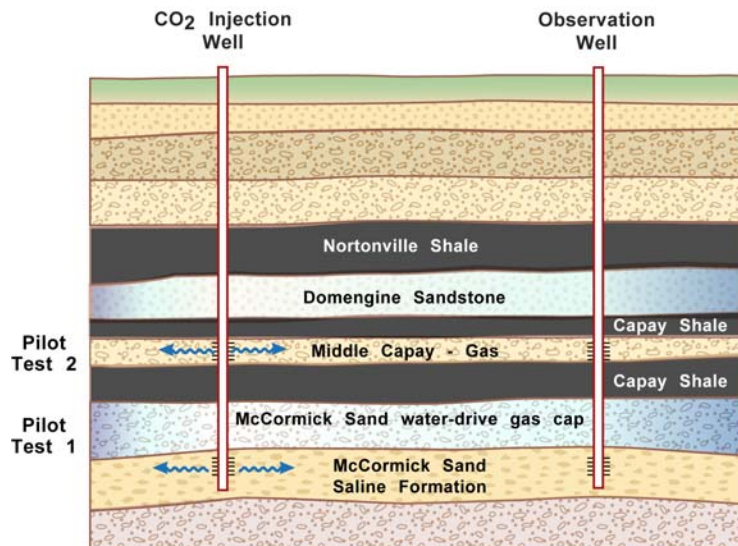


Figure 3. Typical geologic section showing stacked reservoir. Pilot Test #1 is in the lower McCormick sand and Test #2 is in the Middle Capay Shale.

Capay Shale — Gas Reservoir Pilot

The second experiment will involve injecting up to 2000 tons of CO₂ into a depletion-drive, depleted gas reservoir located within the Middle Capay shale at a depth of 928 m (3044 feet). The Capay shale represents a regionally extensive reservoir cap (Figure 3), containing pockets of natural gas in thin

interbedded sand lenses. The top of the McCormick sand, a depleted water-drive reservoir at a slightly greater depth of 1003 to 1021 m, is an alternative location for the gas reservoir test if the Capay sand stringer is absent at the location of the new wells. The casing will be perforated in the gas zone after completing the first experiment and cementing the well perforations to shut in the lower saline zone. CO₂ will be purchased from a local supplier and trucked to the site for both pilot tests.

ENHANCED GAS RECOVERY


The second experiment consists of injecting CO₂ into the depleted gas zone to assess the nature and extent of reservoir pressurization and displacement of methane by CO₂. The Rosetta Resources CO₂ Storage Project will be the first field-scale test used to demonstrate CO₂ Storage with Enhanced Gas Recovery (CSEGR). Depleted petroleum reservoirs are especially promising targets for CO₂ storage because of the potential to use CO₂ to extract additional oil or natural gas. The benefit of enhanced oil recovery (EOR) using injected CO₂ to swell and mobilize oil from the reservoir toward a production well is well known. CSEGR involves a similar CO₂ injection process, but relies on sweep and methane displacement and has received far less attention. Depleted natural gas reservoirs are not entirely devoid of methane, therefore, CO₂ injection may enhance methane production by reservoir repressurization or pressure maintenance.

PRELIMINARY RESULTS IN SUPPORT OF TEST DESIGN

Preliminary computer simulations were conducted using TOUGH2/EOS7C in support of the pilot tests at the conceptual design level. The questions addressed at the conceptual design level include the following:

1. How much CO₂ should be injected and at what rate?
2. What are the expected pressure and temperature changes in the reservoir associated with the injection?
3. What kind of monitoring and sampling should be conducted in the observation well?

Using preliminary estimates of homogeneous formation properties (permeability 10^{-12} m^2 and porosity 35%), and boundary and initial conditions, preliminary simulations showed that breakthrough of supercritical CO₂ will occur during the saline test within 10 days at an observation well located 39 m from the injector (Figure 4). Approximately 1800 tonnes of CO₂ injected at a rate of 2 kg/s into the upper-most 4 m of the McCormick Sand is required to produce this result. In contrast, breakthrough of CO₂ gas will

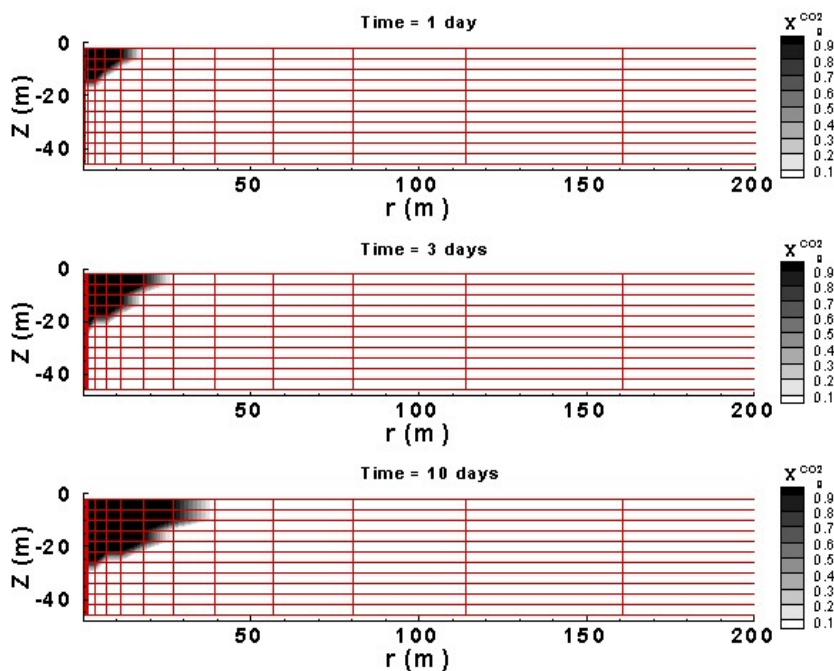

occur in the 2-3 m thick Capay Shale gas interval containing methane at the same 39 m distance within a couple of days (Figure 5) using far less CO₂ (1000 tonnes injected at a rate of 1.2 kg/s). Pressure changes caused by injection are small in both cases (<0.3 bars) and temperature effects are minimal.

Figure 4. Mass fraction of CO₂ in the gas ($X_g^{CO_2}$) at three times after injection into the upper-most 4 m of the McCormick saline formation at a rate of 2 kg/s, assuming radial symmetry.


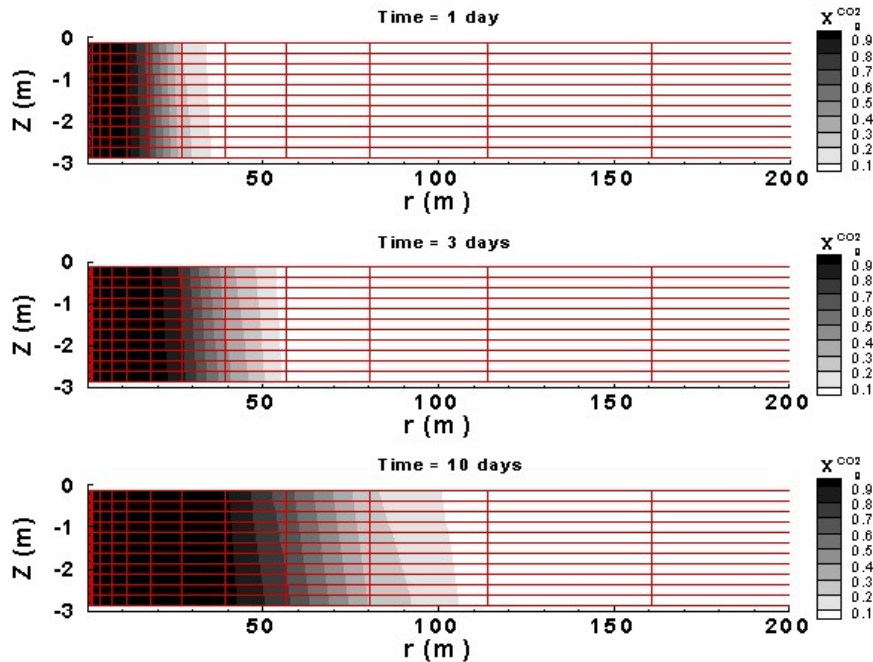


Figure 5. Two-dimensional r - z results showing CO_2 mass fraction in the gas phase ($X_g\text{CO}_2$) at three times after injection into the Capay gas reservoir, assuming radial symmetry.

Figure 6. Rosetta Resources CO_2 Storage Project

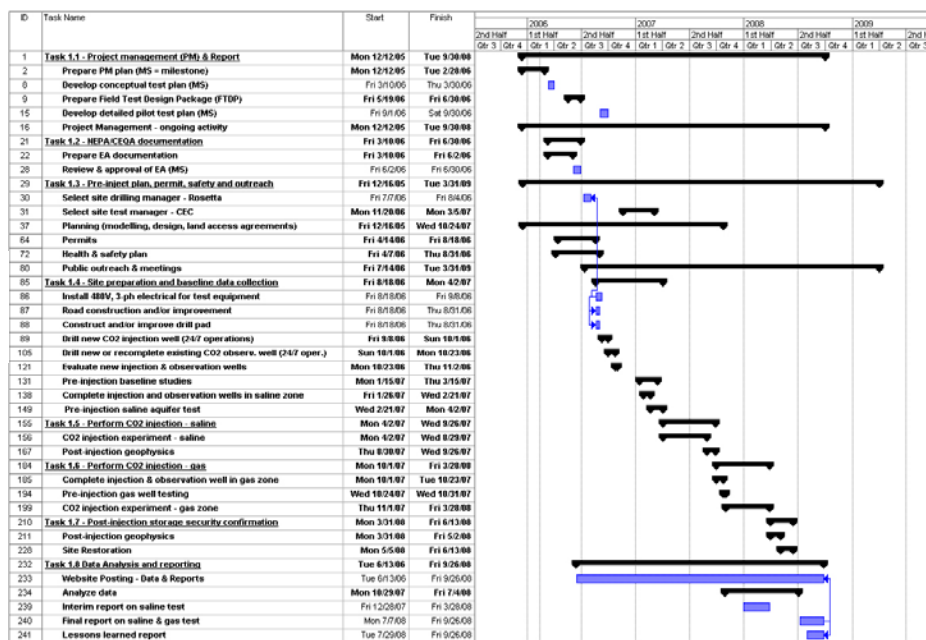

CONCLUSION

A detailed project management plan and schedule (Figure 7) have been developed describing the proposed pilot Tests and defining the sequence of test activities. Implementation of the field program will begin in August 2006 starting with site preparation activities and well installation. Injection of CO_2 into the saline zone will begin in Spring 2007 and into the gas zone in Fall 2007.

ACKNOWLEDGMENT

This work is supported by WESTCARB through the Assistant Secretary for Fossil Energy, Office of Coal and Power Systems, through the National Energy Technologies Laboratory (NETL), and Lawrence Berkeley National Laboratory, under Department of Energy Contract No. DE-AC02-05CH11231.